

AD-A241 696



ANNUAL REPORT

VOLUME 5

**TASK 5: GN&C PROCESSOR DEVELOPMENT
and PFP INTEGRATION**

REPORT NO. AR-0142-91-002

September 24, 1991

GUIDANCE, NAVIGATION AND CONTROL

DIGITAL EMULATION TECHNOLOGY LABORATORY

Contract No. DASG60-89-C-0142

Sponsored By

The United States Army Strategic Defense Command

COMPUTER ENGINEERING RESEARCH LABORATORY

Georgia Institute of Technology

Atlanta, Georgia 30322-0540

Contract Data Requirements List Item A005

Period Covered: FY 91

Type Report: Annual

91-12576



2

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE

REPORT DOCUMENTATION PAGE

Form Approved
OMB No 0704-0188

1a REPORT SECURITY CLASSIFICATION Unclassified			1b RESTRICTIVE MARKINGS		
2a SECURITY CLASSIFICATION AUTHORITY			3 DISTRIBUTION/AVAILABILITY OF REPORT 1) Approved for public release; distribution is unlimited 2) continued on reverse side		
2b DECLASSIFICATION/DOWNGRADING SCHEDULE			5 MONITORING ORGANIZATION REPORT NUMBER(S)		
4 PERFORMING ORGANIZATION REPORT NUMBER(S) AR-0142-91-002					
6a NAME OF PERFORMING ORGANIZATION School of Electrical Eng. Georgia Tech		6b OFFICE SYMBOL (If applicable)	7a NAME OF MONITORING ORGANIZATION U.S. Army Strategic Defense Command		
6c ADDRESS (City, State, and ZIP Code) Atlanta, Georgia 30332		7b ADDRESS (City, State, and ZIP Code) P.O. Box 1500 Huntsville, AL 35807-3801			
8a NAME OF FUNDING/SPONSORING ORGANIZATION		8b OFFICE SYMBOL (If applicable)	9 PROCUREMENT INSTRUMENT IDENTIFICATION NUMBER DASG60-89-C-0142		
8c ADDRESS (City, State, and ZIP Code)		10 SOURCE OF FUNDING NUMBERS			
		PROGRAM ELEMENT NO.	PROJECT NO.	TASK NO.	WORK UNIT ACCESSION NO.
11 TITLE (Include Security Classification) Guidance, Navigation and Control Digital Emulation Technology Laboratory Volume 5 (Unclassified)					
12 PERSONAL AUTHOR(S) C. O. Alford, M. B. Woods, R. M. Pitts, P. R. Bingham					
13a TYPE OF REPORT Annual		13b TIME COVERED FROM 9/28/90 TO 9/27/91		14 DATE OF REPORT (Year, Month, Day) 9/27/91	
				15 PAGE COUNT 35	
16 SUPPLEMENTARY NOTATION					
17 COSATI CODES			18 SUBJECT TERMS (Continue on reverse if necessary and identify by block number)		
FIELD	GROUP	SUB-GROUP			
19 ABSTRACT (Continue on reverse if necessary and identify by block number)					
1. Introduction			6. Schedule/Milestones		
1.1 Objectives			7. References		
1.2 Requirements			8. Appendix A: Schematics		
2. PFP					
2.1 Existing PFP Systems and Their Use					
3. GN&C Processor Development					
3.1 The Ga. Tech GN&C Processor Board and System Development					
4. PFP/GN&C/SSE Integration for Emulation and Testing					
4.1 EXOSIM Closed Loop Demonstration					
4. New Developments					
5.1 Support for Other Programs					
5.2 Planned Developments					
20 DISTRIBUTION/AVAILABILITY OF ABSTRACT <input checked="" type="checkbox"/> UNCLASSIFIED/UNLIMITED <input type="checkbox"/> SAME AS RPT. <input type="checkbox"/> DTIC USERS			21 ABSTRACT SECURITY CLASSIFICATION Unclassified		
22a NAME OF RESPONSIBLE INDIVIDUAL			22b TELEPHONE (Include Area Code)		22c OFFICE SYMBOL

~~UNCLASSIFIED~~
Security Classificaton of this page

Distribution statement continued

- 2) This material may be reproduced by or for the U.S. Government pursuant to the copy license under the clause at DFARS252.227-7013, October 1988.

UNCLASSIFIED
~~Security Classification of this page~~

ANNUAL REPORT

VOLUME 5

**TASK 5: GN&C PROCESSOR DEVELOPMENT
and PFP INTEGRATION**

September 24, 1991

Author

Michael B. Woods, Richard M. Pitts, and Philip R. Bingham

COMPUTER ENGINEERING RESEARCH LABORATORY

Georgia Institute of Technolog

Atlanta, Georgia 30322-0540

Eugene L. Sanders

USASDC

Contract Monitor

Cecil O. Alford

Georgia Tech

Project Director

Copyright 1991

Georgia Tech Research Corporation

Centennial Research Building

Atlanta, Georgia 30332

Accession For
NRI UNCLASSIFIED
DTIC Tab
Unclassified
Justification
By
Distribution/
Availability Code
Dist
A-1

DISCLAIMER

The views, opinions, and/or findings contained in this report are those of the author(s) and should not be construed as an official Department of the Army position, policy, or decision, unless so designated by other official documentation.

DISTRIBUTION CONTROL

- (1) This material is approved for public release unlimited distribution.
- (2) This material may be reproduced by or for the U.S. Government pursuant to the copyright license under the clause at DFARS 252.227-7013, October 1988.

TABLE OF CONTENTS

1. Introduction	1
1.1. Objectives	1
1.2. Requirements	4
2. PFP	4
2.1 Existing PFP Systems and Their Use	4
2.1.1 Intel 310 Hosted 80386 Based 32 Processor System	5
2.1.2 Sun Hosted FPP/FPX/80386 Based 32 Processor System	6
2.1.3 Sun Hosted FPP/FPX/80386 Based 64 Processor Software Development System	7
2.1.4 Sun Hosted Hardware Development System	8
2.1.5 KDEC System	9
3. GN&C Processor Development	10
3.1. The Georgia Tech GN&C Processor Board and System Development	10
3.1.1 The GT-SSESP/1	13
3.1.2 The GT-NUCTF/1	24
3.1.3 The GT-SPOBJ/1	24
3.1.4 The GT-EP1553/1	24
3.1.5 The GT-SM8/1	24
3.1.6 The GT-S5EP/1	25
3.1.7 The GT-S5DP/1	25
3.1.8 The GT-SPAT/1 and GT-GNCTST/1	25
3.1.9 The GT-VDSTST/1	27
3.1.10 Stand Alone Testing	28
4. PFP/GN&C/SSE Integration for Emulation and Testing	28
4.1 EXOSIM Closed Loop Demonstration	29
5. New Developments	29
5.1 Support for Other Programs	29
5.1.1 AHAT Testing	29
5.1.2 GBI/LEAP/E2I	31
5.2 Planned Developments	31
5.2.1 New Crossbar	31

5.2.2 New Sequencer	32
5.2.3 New Processor/Crossbar Interface	32
6. Schedule/Milestones	33
7. References	34
8. Appendix A: Schematics	35

1. Introduction

The Georgia Tech GN&C processor is being built from custom designed VLSI chips, which have been designed at Georgia Tech. This volume covers the board level designs, system packaging, integration of a prototype into the Parallel Function Processor (PFP) environment for testing, and plans for using the PFP to test a radiation hardened version of the processor being built by Harris Corporation. Details on the design and test of the individual chips are covered in Volumes 6 and 7 of this report. In addition, this volume also covers the status of the currently available PFP systems, as well as their current functions and use, and plans for future PFP upgrades and improvements.

The simulation hardware in the DETL (the DETL facility is described in Volume 1 of this report) centers on the development, implementation, and use of the PFP. The PFP is a 64 processor digital computer for use in computationally intensive applications that can be partitioned into functional blocks. The processors are grouped in two 32 processor clusters running from one common host. Each 32 processor cluster is connected by a crossbar switch. All inter-processor communication takes place over the crossbar(s). Simultaneous transfers may take place independently and switch patterns may be changed every cycle. In order to program the machine correctly, all inter-processor communication and data transfer lengths must be known beforehand.


The PFP has been designed to support "hardware in the loop" simulations running in real time [1]. Actual hardware components may first be simulated on one or more processors and later replaced with actual hardware interfaced to specified crossbar ports. The inputs and outputs to/from the device will appear identical to those it would see in an actual system.

Figure 1.1 illustrates the basic PFP architectural concept. Figure 1.2 illustrates a front view of the actual machine. A deeper level of architectural detail can be found in the final report for FY89, volumes 1 and 2 [2], the final report for FY90, Volume 4 [3], and in the PFP technical data package [4].

1.1. Objectives

Within DETL, there are two main hardware systems: The PFP and the Seeker Scene Emulator. The Seeker Scene Emulator is covered in Volume 2 of this report. The two systems are designed to function together as a simulation/emulation facility for kinetic energy weapons systems. The principal objectives of the DETL are as follows:

- Provide facilities for 6-DOF KEW emulation
- Provide real-time capability in excess of 2000 Hz
- Provide support for nonlinear functions
- Provide real-time emulation of IR FPA seekers
- Provide a facility for testing and verification of GN&C processors

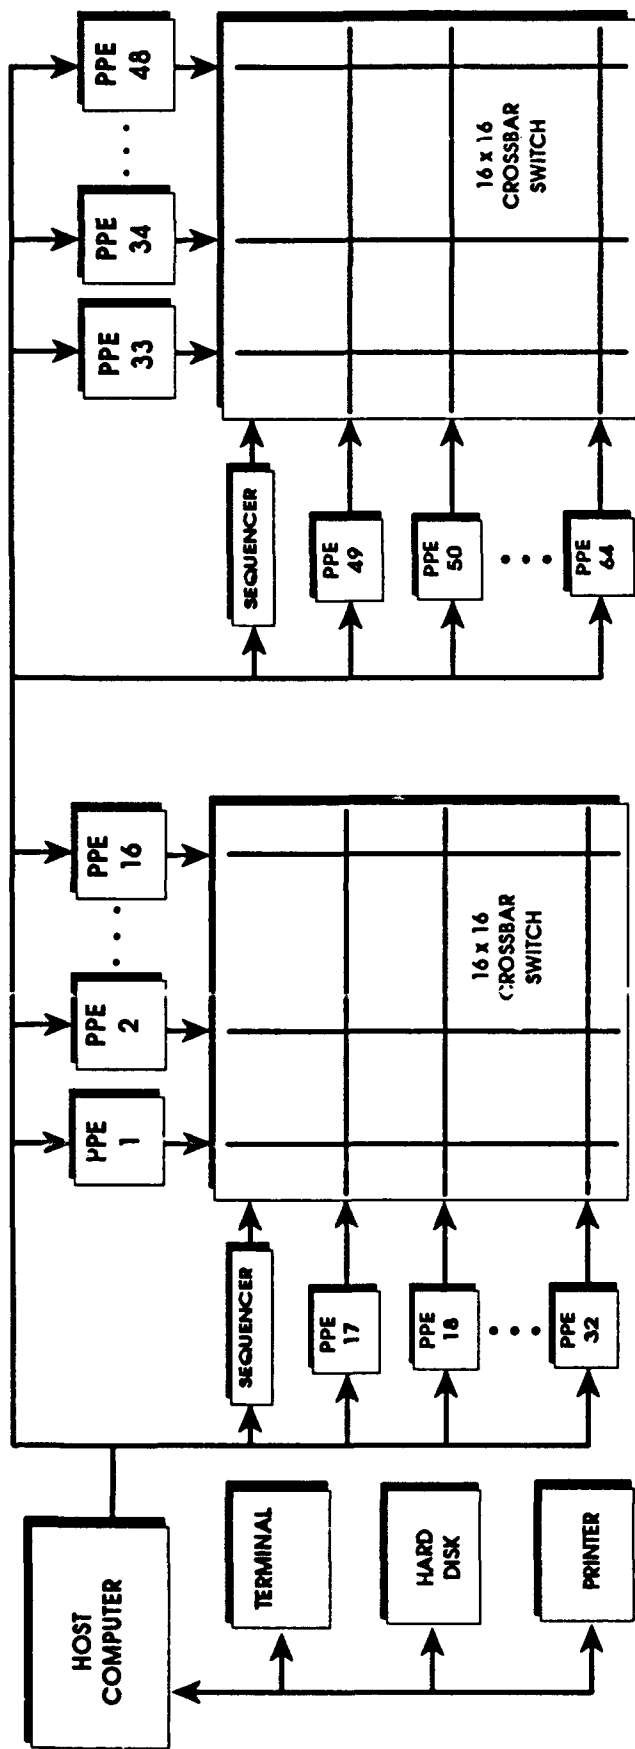

HOST COMPUTER

SUN 386i

FORTRAN

Ada

C

DIAGNOSTICS

UTILITIES

CROSSBAR

TWO UNITS

32 PORTS EACH

INTERCONNECTION BY ARI MODULE

PARALLEL PROCESSING ELEMENTS

64 NODES

4 PROCESSOR TYPES

INTEL ISBC 386/12

GT-FPP (32-BIT)

GT-FPX (64-BIT)

GT-1860

I/O A/D-D/A PPE

SBX SERIAL PORT

SCSI

1553

PERFORMANCE

GT-FPP

10 MFLOPS PEAK

GT-FPX

7.5 MFLOPS PEAK

ISBC 386/12

0.3 MFLOPS AVG.

DATA TRANSFERS

1.0 Gbps

Figure 1.1
Parallel Function Processor Architecture

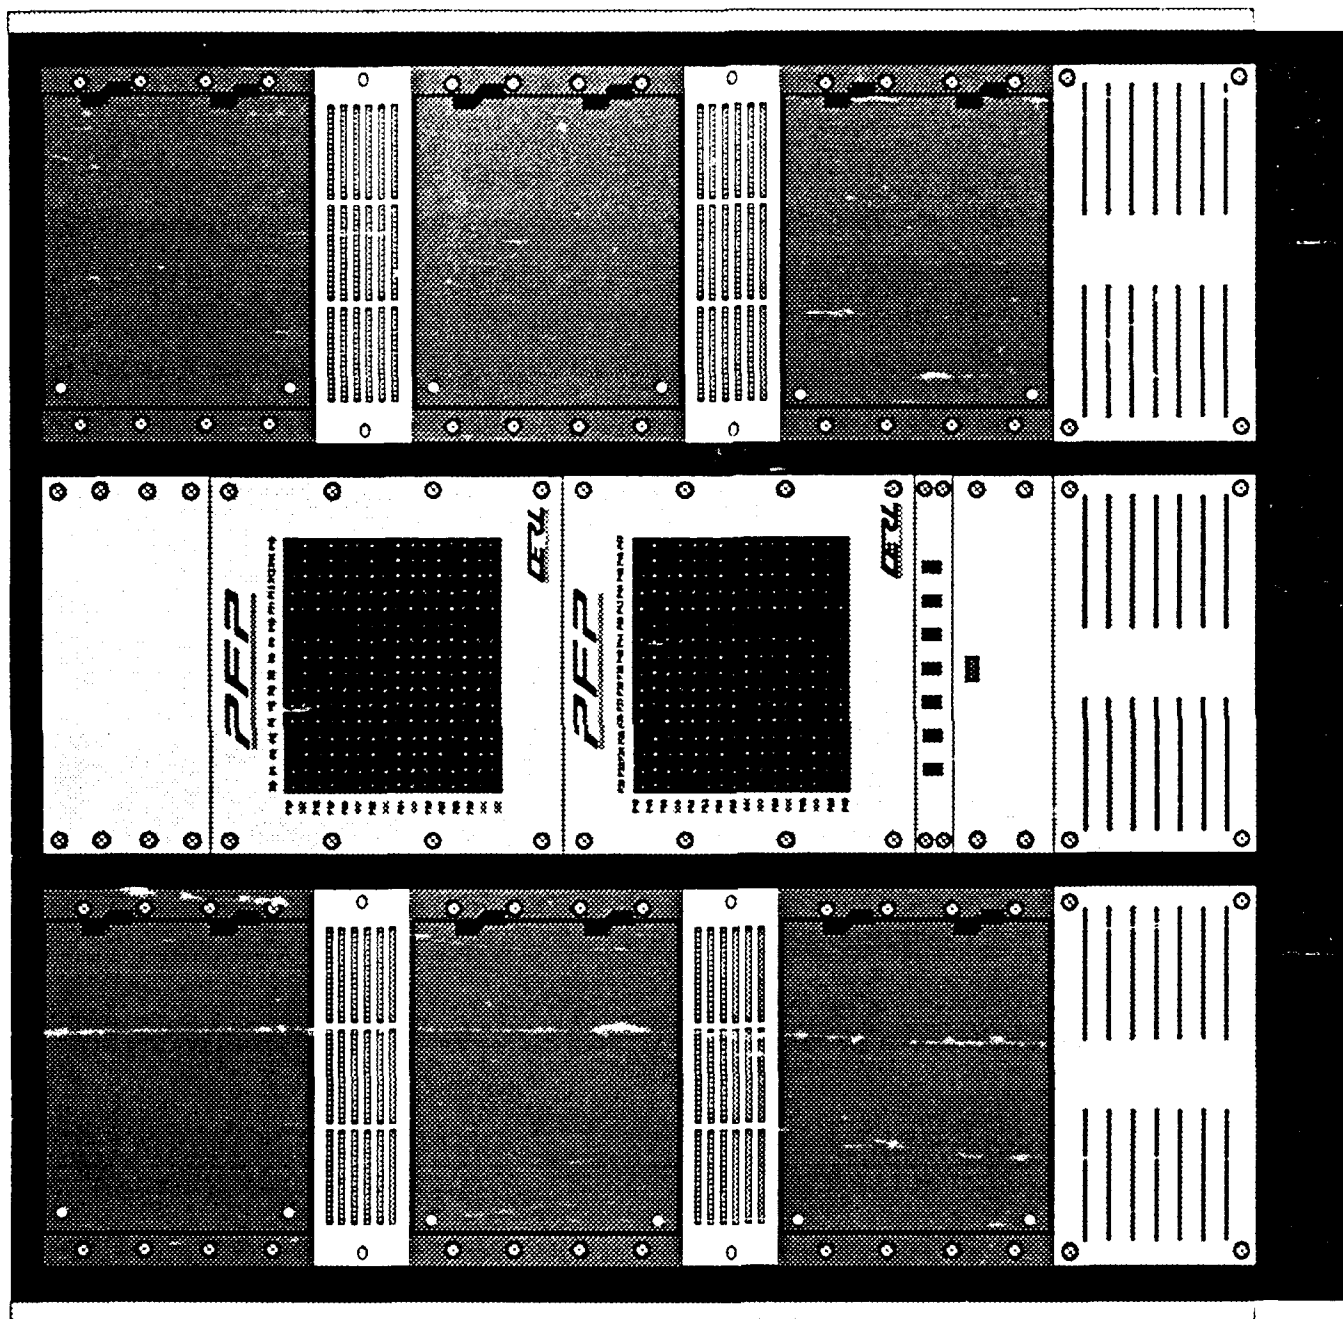


Figure 1.2
PEP 484 Processor (Front View)

Real-time emulation of IR FPA seekers is primarily the responsibility of the Seeker/Scene Emulator. The other objectives are primarily the responsibility of the PFP.

1.2. Requirements

The requirements for the period covered by this report fall into two main categories. The first category emphasizes using and supporting the PFP technology that has been developed for actual six degree of freedom (6-DOF) simulations and emulations, and integrated component testing.

The second category emphasizes the board and system level design, construction, integration, and testing of the Georgia Tech GN&C processor, which is built from custom IC's developed at Georgia Tech. A system packaging scheme has been developed, boards have been designed and built, and the boards have been and are being integrated into the PFP/SSE environment and tested. A third category, which is always under consideration is planned upgrades and improvements to the PFP systems.

The milestones met for the period covered by this report are as follows:

- Delivery and installation of a PFP unit to USADC/Huntsville's KDEC facility.
- A real time parallel Ada implementation of the EXOSIM V1.0 boost phase running on a PFP.
- A real time parallel C implementation of the EXOSIM V2.0 boost, mid-course and terminal phases running on a PFP.
- Design and construction of a prototype version of the Georgia Tech GN&C processor.
- Development of a stand alone PC hosted test station for the GN&C prototype.
- Integration and testing of the GN&C processor prototype in the PFP/SSE environment.

2. PFP

2.1 Existing PFP Systems and Their Use

The Digital Emulation Technology Laboratory has four in house PFPs currently in use and one PFP has been delivered to USADC's KDEC facility in Huntsville, Alabama. Two separate 32 processor system are located in the DETL's secure laboratory and have both been used extensively for classified work. A software development PFP, located outside the classified area, is primarily being used to develop and debug the software tools and operating environment that is eventually used to update the other PFP systems. This system is also used regularly for unclassified Ada development work. A fourth PFP system is available outside the classified area for testing and debugging new PFP boards.

Each of the four in house PFPs can be and are utilized in conjunction with or

independently of the other PFPs. For example, in the development of the multi-processor parallel implementation of the classified EXOSIM boost phase and the [classified EXOSIM] midcourse and terminal phases, a serial program was ported from a VAX environment to a single processor on the Intel 310 hosted thirty-two processor Intel 386 single board computer based PFP. The partitioning was then performed on the same PFP, and as each partition was finished it was moved to the Sun hosted thirty-two processor 386/FPP/FPX based PFP where the simulation was implemented and executed in real-time. The sixty-four processor Sun hosted software development system was being utilized for the implementation of the unclassified Ada version of the EXOSIM boost phase simulation, in addition to the continued development and refinement of the Sun host and FPP/FPX operations. The Sun hosted hardware development system is used for testing and debugging of new and existing hardware that is designated for the above mentioned PFPs.

The following five sections describe the configuration of each of the PFPs. Each section contains the current configurations and capabilities of the respective unit. The PFPs are configured as described, but on an as needed basis each or all of the parallel processing elements listed could be replaced with any of the other elements listed in Figure 1.

2.1.1 Intel 310 Hosted 80386 Based 32 Processor System

The Intel 310 hosted 80386 based 32 processor system is located in a secure area and is cleared for classified processing. The system hardware is configured with the following:

Host

- An 80386 Single Board Computer, 20 Mhz, 3 Mbytes RAM.
- Two 140 Mbyte removable hard disks.
- An HDS 200 terminal.

PFP

- One thirty-two port crossbar and sequencer combination.
- Twenty-four 20 MHZ Intel 80386 single board computers with 1 Mbyte RAM each.
- Eight 8 MHZ Intel 80286 single board computers with 1 Mbyte RAM each.

The system software is configured with the following :

Host

- C, FORTRAN, and Pascal compilers.

PFP

- C, FORTRAN, and Pascal compilers.

- Crossbar/Sequencer compiler.
- Processor, crossbar, and sequencer loaders.
- Ioserver - interface between the host and the processor.

This machine was heavily utilized in the partitioning of EXOSIM's boost phase, midcourse and terminal phases, and the end to end simulation. Since the machine is completely populated with commercially available boards using commercially available compilers, the machine provides the most programming language choices of any of the in house PFPs. The off the shelf processors and compilers provide a wide range of capabilities for the user as parallel modules are designed and developed. This PFP has been used as the first platform in the process of bringing a serial program onto a PFP and beginning the parallel partitioning, because all of the serial programs obtained have been written in FORTRAN. The original code can be partitioned directly in FORTRAN, and re-compiled with the answers for each module verified directly against sections of the original code [5].

2.1.2 Sun Hosted FPP/FPX/80386 Based 32 Processor System

The Sun hosted FPP/FPX/80386 based 32 processor system is located in a secure area and is cleared for classified processing. The system hardware is configured with the following:

Host

- A 25 MHZ Sun 386i computer with 12 Mbytes RAM.
- Two 700 Mbyte SCSI removable hard disks.
- A 16 inch color Sun graphics monitor.

PFP

- One thirty-two port crossbar and sequencer combination.
- Twenty-two 10 MHZ, 8 Mflop GT-FPP single board computers.
- Six 8 MHZ, 6 Mflop, GT-FPX single board computers.
- Four 20 MHZ Intel 80386 single board computers with 1 Mbyte RAM each.

The system software is configured with the following:

Host

- C and FORTRAN compilers.

PFP

- C compilers for all 3 processor types.
- Ada-to-C and FORTRAN-to-C translators.
- The Crossbar/Sequencer compiler.
- Loaders for all processors, as well as the crossbar and sequencer.
- Software interface tools to allow for easy debug between the host and the processors.

This PFP was instrumental the implementation of EXOSIM's boost phase and midcourse terminal phases in real time. The Sun's graphic capabilities are put to use in the form of trajectory tracking and plotting. The interceptor and target are displayed in two planes in order to provide a good perspective of the missile's launch, stage separations, flip maneuver, midcourse diverts, target acquisition, frame rate changes, engagement diverts, and the interception. The implementation of this simulation also provides a testbed for the refinement of the C compilers for the GT-FPP and GT-FPX processors. This PFP is the second and final platform a simulation is ported to as the partitioning process progresses and the need for real time execution arises. Real time Ada implementations of classified simulations will be performed on this unit.

2.1.3 Sun Hosted FPP/FPX/80386 Based 64 Processor Software Development System

The Sun hosted FPP/FPX/80386 based 64 processor system is located outside of the secure area. The system is configured with the following hardware:

Host

- A 25 MHZ Sun 386i computer with 12 Mbytes RAM.
- A 700 Mbyte hard disk.
- A network interface.
- A 16 inch color Sun graphics monitor.

PFP

- Two thirty-two port crossbar and sequencer combinations (64 total crossbar ports).
- Eighteen 10 MHZ, 8Mflop GT-FPP single board computers.
- Six 8 MHZ, 6 Mflop GT-FPX single board computers.

The system software is configured with the following :

Host

- C and FORTRAN compilers.

PFP

- C compilers for all supported processors.
- Ada-to-C and FORTRAN-to-C translators.
- The Crossbar/Sequencer compiler.
- Loaders for the processors, crossbar, and sequencer.
- Software interface tools to allow for easy debug between the host and the processors.

This machine is used regularly for simulations [6] and was instrumental in the real-time implementation of the unclassified EXOSIM boost phase simulation in both FORTRAN and Ada. The graphic capabilities are put to use in the form of trajectory tracking and plotting. As with the previous PFP system, this machine is used in the refinement of the C compilers for the GT-FPP and GT-FPX processors, along with the development of new capabilities for the Sun hosted systems. The development, execution, and refinement of the Ada modules are performed on this machine.

2.1.4 Sun Hosted Hardware Development System

The Sun hosted hardware development system is located outside of the secure area. The system hardware is configured from the following:

Host

- A 25 MHZ Sun 386i computer with 12 Mbytes RAM.
- A 300 Mbyte hard disk.
- A network interface.
- A 16 inch color Sun graphics monitor.

PFP

- One thirty-two port crossbar and sequencer combination.
- Twenty-five 10 MHZ, 8 Mflop GT-FPP single board computers.

The system software consists of the following :

Host

- C and FORTRAN compilers.

PFP

- C compilers for both the GT-FPP and GT-FPX processors.
- A FORTRAN-to-C translator.
- The Crossbar/Sequencer compiler.
- Loaders for the processors, crossbar, and sequencer.
- Software interface tools to allow for easy debug between the host and the processors.

This machine is used as a hardware testbed to support for the Sun hosted PFPs. Starting with the original diagnostics written on the Intel 310 systems, Sun based diagnostics to test the integrity of the multibus paths between the host and (i) the processors and (ii) the crossbar and sequencer combinations have been developed. In addition to this, two other test programs were written to test the crossbar, sequencer, and processor interconnections. The first verifies the processor to sequencer handshake lines and performs a minimal check on the crossbar data paths. The second performs a rigorous confidence test on the whole thirty-two port crossbar network, with the main concentration on the reliability of the data transfers between any single port and all other ports. After development, the applicable diagnostics can be moved to the other Sun based systems as needed.

2.1.5 KDEC System

The KDEC system is located at USADC's KDEC facility in Huntsville Alabama. The system is hosted by Intel 310 and consists of the following hardware configuration:

Host

- An 8 MHZ 80286 based Intel 310 computer with 3 Mbytes RAM.
- A 140 Mbyte hard disk.
- An HDS 200 terminal.
- A 2400 baud modem.

PFP

- One thirty-two port crossbar and sequencer combination.
- Thirty-two 8 MHZ Intel 80286 single board computers with 1 Mbyte RAM each.

The system software consists of the following :

Host

- C, FORTRAN, and Pascal compilers.

PFP

- C, FORTRAN, and Pascal compilers.
- The Crossbar/Sequencer compiler.
- Loaders for the processors, crossbar, and sequencer.
- Interface programs between the host and the processors to aid in debug.

This machine was utilized in the partitioning of the unclassified version of FXOSIM's boost phase simulation and is now located in the Simulation Center at the KDEC facility in Huntsville, Alabama. A training course for several users was conducted in Huntsville and this machine was utilized during the laboratory time. Several simulations developed at DETL have been delivered to the KDEC facility and have been installed on the machine. Users work with the machine on a weekly basis using these simulations.

This PFP has the capability of supporting sixty-four parallel processing elements, with two thirty-two port crossbar networks and the two companion sequencers. The current configuration consists, as noted above, of only one crossbar and sequencer combination and thirty-two 80286 processors. This configuration was delivered to provide a solid, proven environment for the KDEC programmers to learn the system. Plans have been delivered to upgrade the PFP including replacement of the host, upgrading to higher performance processors, and the possible installation of a dynamically reconfigurable crossbar switch. Georgia Tech provides system support for this PFP, along with delivering unclassified and classified parallel simulations to KDEC facility.


3. GN&C Processor Development

3.1. The Georgia Tech GN&C Processor Board and System Development

The architecture of the Georgia Tech GN&C Processor is shown in Figure 3.1. The architecture consists of up to eight processors connected by a crossbar switch. Two types of processors have been designed, called the Data Processor and the Executive Processor, respectively. The Data Processor is used for tight control loops that require small memory. It is built from four custom VLSI chips and has no external memory. The Executive Processor consists of four custom VLSI chips plus external memory for data and instructions. This processor can serve as an I/O processor and an object processor.

In addition, a Signal Processor consisting of six custom VLSI chips is included in the package. The functions included in the SP chain are spatial filtering, temporal filtering, non-uniformity compensation, thresholding, clustering, and centroiding. Details on the functionality of each of these custom chips, including the Executive and Data Processors, can be found in Volume 7 of this report.

The physical construction of the processor package consists of a collection of stackable modules, which are shown in Figure 3.2. Since the system is modular, different combinations of

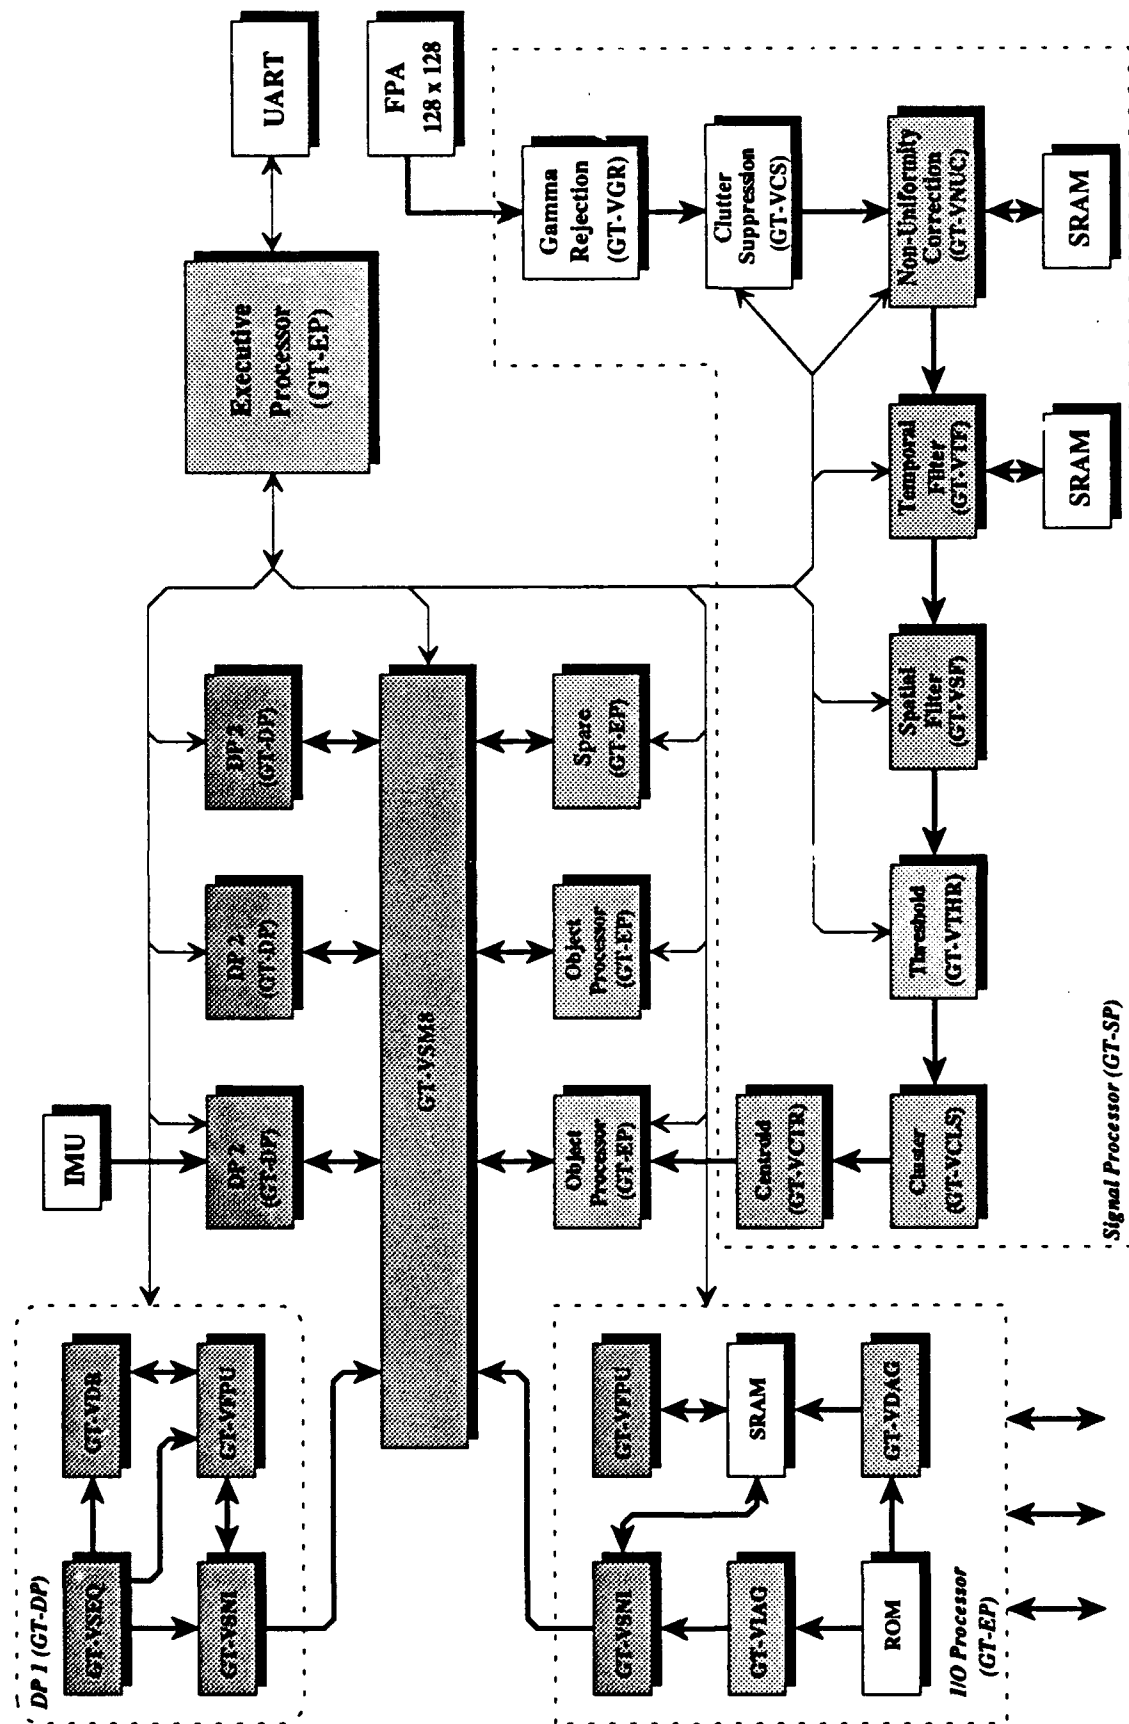

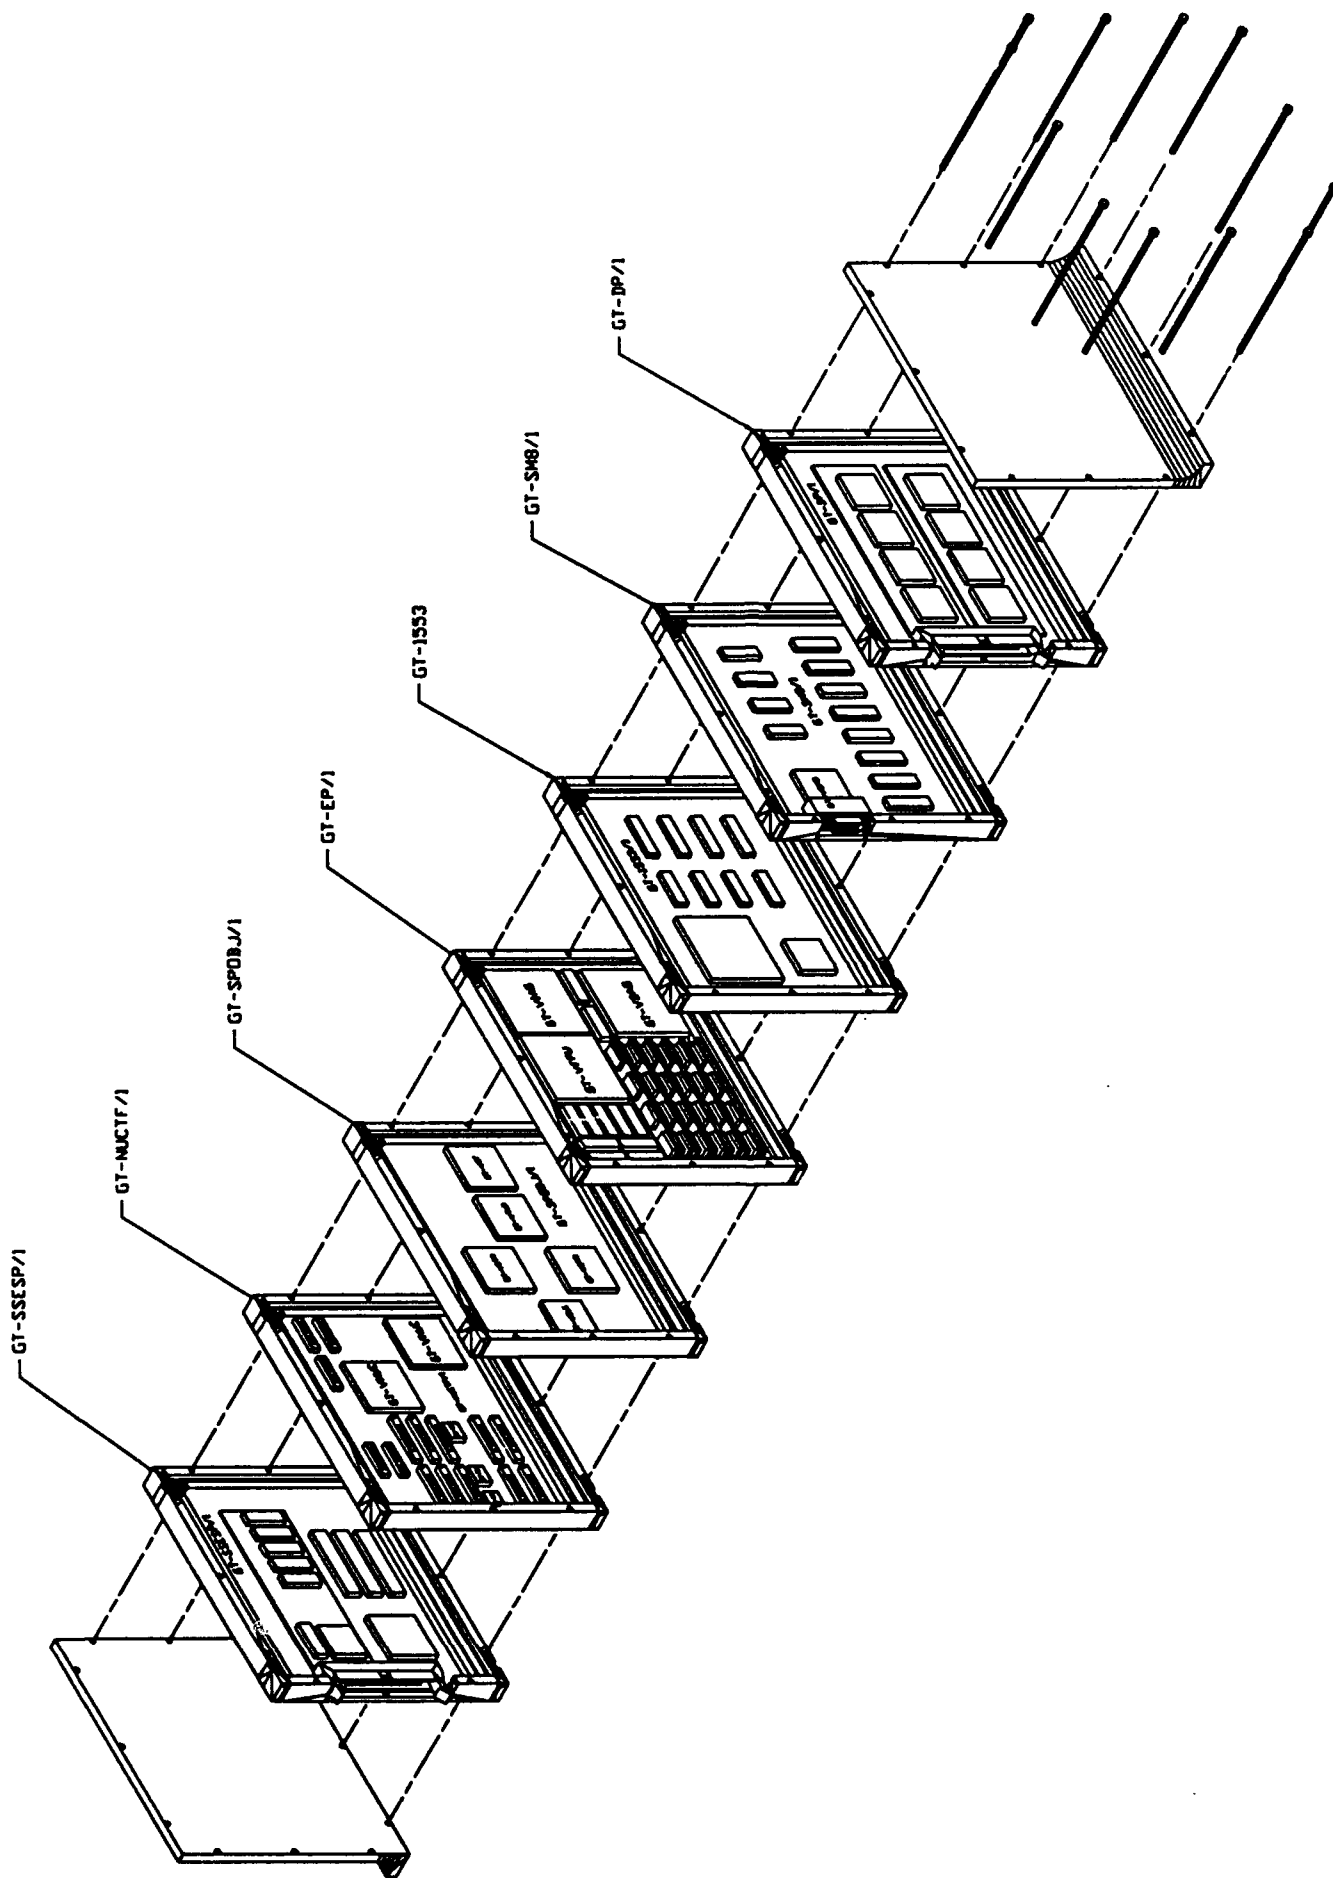


FIGURE 3.2
GN&C SYSTEM CONFIGURED WITH 2 DATA PROCESSORS

modules can be put together to configure a system for a specific application. Figure 3.2 illustrates a configuration with one Executive Processor and two Data Processors. Figure 3.3 shows a configuration with one Executive processor and six Data Processors. The computing requirements for the particular application will dictate which modules are included in the stack. Other configurations, for example omitting the signal processing or 1553 portions, or adding new functions, are arrived at in a similar building block type manner.

The physical size of the boards in the system is 5.90" by 6.65". This format is identical to the size of the boards in the Honeywell S5 flight processor, but the signal definitions and circuitry are all based on the Georgia Tech GN&C chip set. Each board contains four rows of 63 pin stackable connectors, which are used make the electrical connections between modules. Two of these connectors, J1 and J2, are permanently dedicated to the EP bus, which serves as the master bus running throughout the stack. The other two connectors, J3 and J4, are dedicated to the SP bus on the signal processing boards. This bus carries all of the communication needed between the signal processing modules, which can happen concurrently with activity on the EP bus. The last SP board in the stack does not pass the SP signals to the other modules in the stack. Only the power, grounds, and system clocks are passed to the non SP boards so that the unused pins on these two connectors are available for other assignments as needed. New modules can be designed and added to the stack by meeting these standard bus specifications.

The Georgia Tech GN&C Processor Prototype structure is shown in a closed configuration in Figure 3.4. External connections include the 1553 bus, RS-422 lines, a PFP crossbar port, a high speed serial port, and a seeker interface port. The 1553 bus and RS-422 lines have been added to provide the same interfaces needed for the AHAT processor, which is to be tested at the DETL. External devices will generate the same signals and input them in the same way. Internally the AHAT configuration will be based on the same chip designs, but the chips will be radiation hardened versions in a Harris devised packaging scheme. It will use the 1553 bus as its main source of communication, and accept interrupts from internal or external devices, generate interrupts or signals for internal devices and manage all the incoming and outgoing traffic. All external interrupts will be sent through the differential RS-422 channels.

The prototype design is based on the Honeywell S-5 form factor. The internal signal bus has been changed to support the Georgia Tech architecture. The EP bus definitions for connectors J1 and J2 are given in Tables 1 and 2 respectively. The SP bus definitions for connectors J3 and J4 are given in Tables 3 and 4 respectively.

3.1.1 The GT-SSESP/1

The GT-SSESP/1, which is currently in the fabrication stage, will serve two purposes. First, it will serve as the external interface between the seeker hardware and the GN&C's signal processor in the processor's actual flight configuration. Second, all system clocks, including the EP bus host clock, the pixel clock, and the non-uniformity compensation clock, will be generated on this board. Both the pixel clock and non-uniformity compensation clock will be programmable from the host processor. The seeker interface consists of a 16 bit parallel data interface, the pixel clock (which the pixel data must be synchronized to), and four other synchronizing signals. These four signals, called begin frame, begin row, end frame, and end



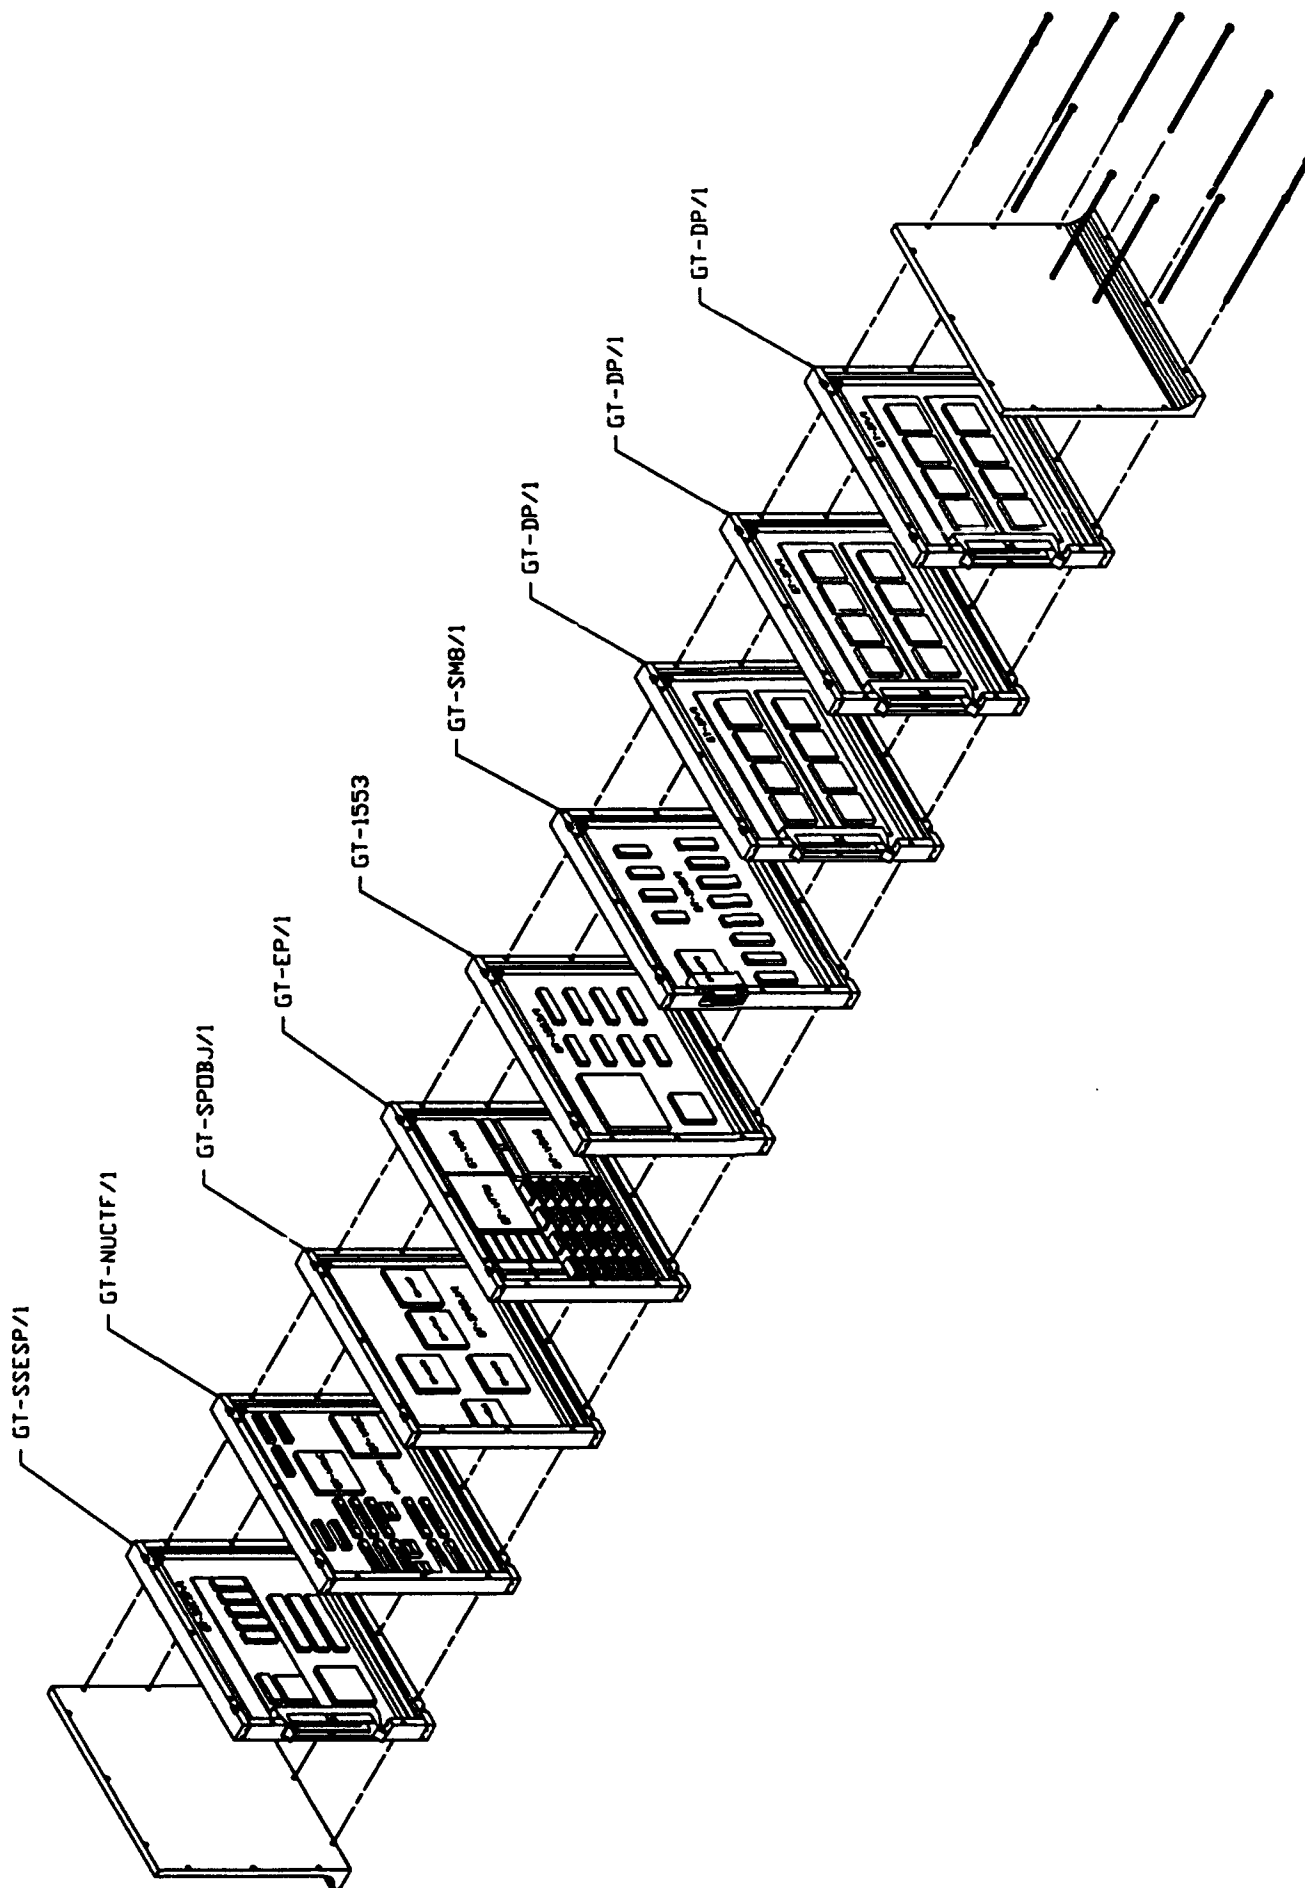



FIGURE 3.3
GN&C SYSTEM CONFIGURED WITH SIX DATA PROCESSORS

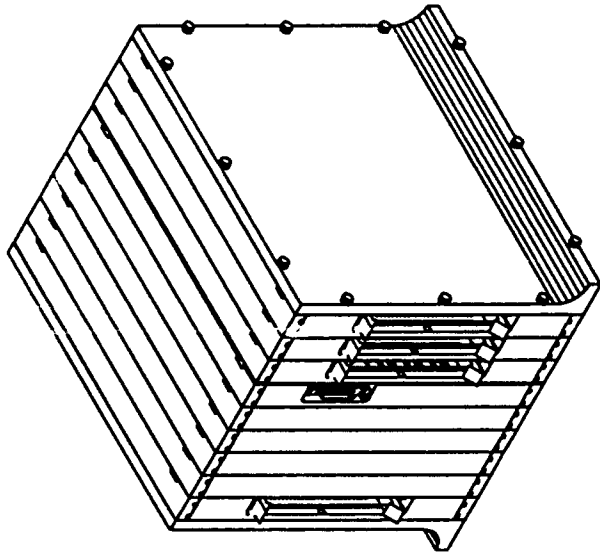


ISOMETRIC VIEW

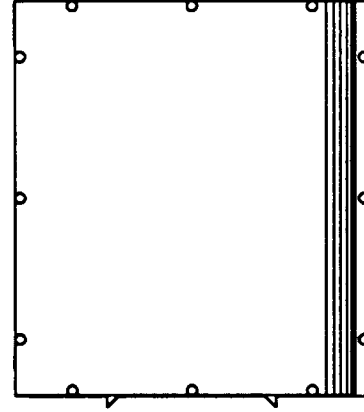

RIGHT VIEW

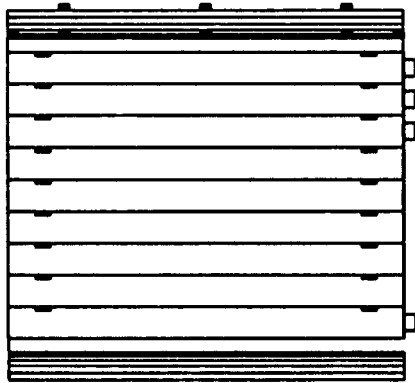

TOP VIEW

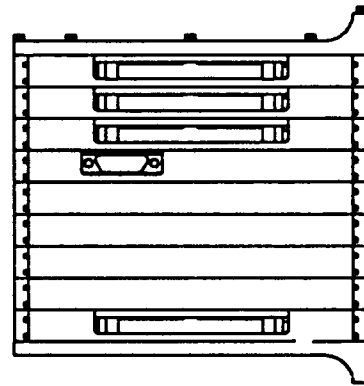

FRONT VIEW

FIGURE 3.4
GN&C SYSTEM IN CLOSED FORM

TABLE 1
Definition of EP Bus Signals on the J1 Connector

Connector	EP BUS Pin Number	Signal Name
J1	Pin 1	+5V
J1	Pin 2	GND
J1	Pin 3	+5V
J1	Pin 4	GND
J1	Pin 5	+5V
J1	Pin 6	GND
J1	Pin 7	HADR_0
J1	Pin 8	HADR_1
J1	Pin 9	HADR_2
J1	Pin 10	HADR_3
J1	Pin 11	HADR_4
J1	Pin 12	HADR_5
J1	Pin 13	HADR_6
J1	Pin 14	HADR_7
J1	Pin 15	HADR_8
J1	Pin 16	HADR_9
J1	Pin 17	HADR_10
J1	Pin 18	HADR_11
J1	Pin 19	HADR_12
J1	Pin 20	HADR_13
J1	Pin 21	HADR_14
J1	Pin 22	HADR_15
J1	Pin 23	HADR_16
J1	Pin 24	HADR_17
J1	Pin 25	HADR_18
J1	Pin 26	HADR_19
J1	Pin 27	HADR_20
J1	Pin 28	HADR_21
J1	Pin 29	+5V
J1	Pin 30	GND
J1	Pin 31	+5V

TABLE 1 (continued)
Definition of EP Bus Signals on the J1 Connector

J1	Pin 32	GND
J1	Pin 33	+5V
J1	Pin 34	GND
J1	Pin 35	HADR_22
J1	Pin 36	HADR_23
J1	Pin 37	HADR_24
J1	Pin 38	HADR_25
J1	Pin 39	DAV2
J1	Pin 40	DAV3
J1	Pin 41	INT_0
J1	Pin 42	INT_1
J1	Pin 43	INT_2
J1	Pin 44	INT_3
J1	Pin 45	INT_4
J1	Pin 46	INT_5
J1	Pin 47	INT_6
J1	Pin 48	INT_7
J1	Pin 49	INT_8
J1	Pin 50	STATUS_0
J1	Pin 51	STATUS_1
J1	Pin 52	STATUS_2
J1	Pin 53	STATUS_3
J1	Pin 54	STATUS_4
J1	Pin 55	READ2
J1	Pin 56	READ3
J1	Pin 57	RESET
J1	Pin 58	IOS
J1	Pin 59	+5V
J1	Pin 60	GND
J1	Pin 61	+5V
J1	Pin 62	GND
J1	Pin 63	+5V

TABLE 2
Definition of EP Bus Signals on the J2 Connector

Connector	EP BUS Pin Number	Signal Name
J2	Pin 1	+5V
J2	Pin 2	GND
J2	Pin 3	+5V
J2	Pin 4	GND
J2	Pin 5	+5V
J2	Pin 6	GND
J2	Pin 7	DATA_0
J2	Pin 8	DATA_1
J2	Pin 9	DATA_2
J2	Pin 10	DATA_3
J2	Pin 11	DATA_4
J2	Pin 12	DATA_5
J2	Pin 13	DATA_6
J2	Pin 14	DATA_7
J2	Pin 15	DATA_8
J2	Pin 16	DATA_9
J2	Pin 17	DATA_10
J2	Pin 18	DATA_11
J2	Pin 19	DATA_12
J2	Pin 20	DATA_13
J2	Pin 21	DATA_14
J2	Pin 22	DATA_15
J2	Pin 23	DATA_16
J2	Pin 24	DATA_17
J2	Pin 25	DATA_18
J2	Pin 26	DATA_19
J2	Pin 27	DATA_20
J2	Pin 28	DATA_21
J2	Pin 29	DATA_22
J2	Pin 30	GND
J2	Pin 31	+5V

TABLE 2 (continued)
Definition of EP Bus Signals on the J2 Connector

J2	Pin 32	GND
J2	Pin 33	+5V
J2	Pin 34	DATA_23
J2	Pin 35	DATA_24
J2	Pin 36	DATA_25
J2	Pin 37	DATA_26
J2	Pin 38	DATA_27
J2	Pin 39	DATA_28
J2	Pin 40	DATA_29
J2	Pin 41	DATA_30
J2	Pin 42	DATA_31
J2	Pin 43	DS_0
J2	Pin 44	DS_1
J2	Pin 45	DS_2
J2	Pin 46	DS_3
J2	Pin 47	NCS2
J2	Pin 48	NCS3
J2	Pin 49	RFI2
J2	Pin 50	RFI3
J2	Pin 51	0DSSEL
J2	Pin 52	IDSSEL
J2	Pin 53	WRITE2
J2	Pin 54	WRITE3
J2	Pin 55	DR
J2	Pin 56	GND
J2	Pin 57	HST_CLK
J2	Pin 58	GND
J2	Pin 59	PXL_CLK
J2	Pin 60	GND
J2	Pin 61	+5V
J2	Pin 62	GND
J2	Pin 63	+5V

TABLE 3
Definition of SP Bus Signals on the J3 Connector

Connector	SP BUS Pin Number	Signal Name
J3	Pin 1	+5V
J3	Pin 2	GND
J3	Pin 3	+5V
J3	Pin 4	GND
J3	Pin 5	+5V
J3	Pin 6	GND
J3	Pin 7	SF_IN0
J3	Pin 8	SF_IN1
J3	Pin 9	SF_IN2
J3	Pin 10	SF_IN3
J3	Pin 11	SF_IN4
J3	Pin 12	SF_IN5
J3	Pin 13	SF_IN6
J3	Pin 14	SF_IN7
J3	Pin 15	SF_IN8
J3	Pin 16	SF_IN9
J3	Pin 17	SF_IN10
J3	Pin 18	SF_IN11
J3	Pin 19	SF_IN12
J3	Pin 20	SF_IN13
J3	Pin 21	SF_IN14
J3	Pin 22	SF_IN15
J3	Pin 23	SF_BFR_I
J3	Pin 24	SF_BRW_I
J3	Pin 25	SF_EFR_I
J3	Pin 26	SF_ERW_I
J3	Pin 27	No Connection
J3	Pin 28	No Connection
J3	Pin 29	+5V
J3	Pin 30	GND
J3	Pin 31	+5V

TABLE 3 (continued)
Definition of SP Bus Signals on the J3 Connector

J3	Pin 32	GND
J3	Pin 33	+5V
J3	Pin 34	GND
J3	Pin 35	PXL_CLK
J3	Pin 36	GND
J3	Pin 37	No Connection
J3	Pin 38	No Connection
J3	Pin 39	No Connection
J3	Pin 40	No Connection
J3	Pin 41	No Connection
J3	Pin 42	No Connection
J3	Pin 43	No Connection
J3	Pin 44	No Connection
J3	Pin 45	No Connection
J3	Pin 46	No Connection
J3	Pin 47	No Connection
J3	Pin 48	No Connection
J3	Pin 49	No Connection
J3	Pin 50	No Connection
J3	Pin 51	No Connection
J3	Pin 52	No Connection
J3	Pin 53	No Connection
J3	Pin 54	No Connection
J3	Pin 55	No Connection
J3	Pin 56	No Connection
J3	Pin 57	No Connection
J3	Pin 58	No Connection
J3	Pin 59	No Connection
J3	Pin 60	No Connection
J3	Pin 61	No Connection
J3	Pin 62	No Connection
J3	Pin 63	No Connection

TABLE 4
Definition of SP Bus Signals on the J4 Connector

Connector	SP BUS Pin Number	Signal Name
J4	Pin 1	+5V
J4	Pin 2	GND
J4	Pin 3	+5V
J4	Pin 4	GND
J4	Pin 5	+5V
J4	Pin 6	GND
J4	Pin 7	NUC_IN0
J4	Pin 8	NUC_IN1
J4	Pin 9	NUC_IN2
J4	Pin 10	NUC_IN3
J4	Pin 11	NUC_IN4
J4	Pin 12	NUC_IN5
J4	Pin 13	NUC_IN6
J4	Pin 14	NUC_IN7
J4	Pin 15	NUC_IN8
J4	Pin 16	NUC_IN9
J4	Pin 17	NUC_IN10
J4	Pin 18	NUC_IN11
J4	Pin 19	NUC_IN12
J4	Pin 20	NUC_IN13
J4	Pin 21	NUC_IN14
J4	Pin 22	NUC_IN15
J4	Pin 23	NUC_BFR_I
J4	Pin 24	NU_BRW_I
J4	Pin 25	NU_EFR_I
J4	Pin 26	NU_ERW_I
J4	Pin 27	No Connection
J4	Pin 28	No Connection
J4	Pin 29	+5V
J4	Pin 30	GND
J4	Pin 31	+5V

TABLE 4 (continued)
Definition of SP Bus Signals on the J4 Connector

J4	Pin 32	GND
J4	Pin 33	+5V
J4	Pin 34	GND
J4	Pin 35	PXL_CLK
J4	Pin 36	GND
J4	Pin 37	No Connection
J4	Pin 38	No Connection
J4	Pin 39	GND
J4	Pin 40	GND
J4	Pin 41	GND
J4	Pin 42	GND
J4	Pin 43	+5V
J4	Pin 44	GND
J4	Pin 45	+5V
J4	Pin 46	GND
J4	Pin 47	+5V
J4	Pin 48	GND
J4	Pin 49	+5V
J4	Pin 50	GND
J4	Pin 51	+5V
J4	Pin 52	GND
J4	Pin 53	+5V
J4	Pin 54	GND
J4	Pin 55	+5V
J4	Pin 56	GND
J4	Pin 57	+5V
J4	Pin 58	GND
J4	Pin 59	+5V
J4	Pin 60	GND
J4	Pin 61	+5V
J4	Pin 62	GND
J4	Pin 63	+5V

row, are generated by the seeker hardware, are based on the size of the focal plane array, and are also synchronized to the pixel clock. Schematics for the GT-SSESP/1 are included in Appendix A. Details on the interface timing are provided in Volume 6 of this report. For testing in the DETL, Georgia Tech's Seeker Scene Emulator will be used to input the seeker data to this port.

3.1.2 The GT-NUCTF/1

The GT-NUCTF/1 board contains the circuitry for the non-uniformity compensation and temporal filtering functions as well as the external memory that each requires (128 kilobytes is required by temporal filtering and 192 kilobytes is required by the non-uniformity compensation). The board design is complete and the board is currently in fabrication. The board contains both an EP bus interface and an SP bus interface. Filter coefficients are loaded over the host EP bus, and buffered pixel data is fed from the GT-SSESP/1 over the SP bus into the non-uniformity compensation chip. The pixel stream then enters the temporal filter, with the filtered pixel stream exiting the board through the SP bus. Schematics for the GT-NUCTF/1 are included in Appendix A.

3.1.3 The GT-SPOBJ/1

The GT-SPOBJ/1 contains the spatial filtering, thresholding, clustering and centroiding functions. The board has been fabricated, tested, and used in actual closed loop demonstrations. Filter coefficients are loaded over the host EP bus. The pixel data stream enters the board from the SP bus after already passing through the non-uniformity compensation and temporal filtering functions. The data stream then passes through spatial filtering, thresholding, clustering, and centroiding, respectively. The centroided object information can then be read by the object processor over the EP bus. Schematics for the GT-SPOBJ/1 are included in Appendix A.

3.1.4 The GT-EP1553/1

The GT-1553/1 board contains the 1553 bus and RS-422 interfaces needed to match the functionality of the Harris AHAT processor. The board is at the end of the design phase and ready to move into fabrication. The 1553 bus interface, can be configured to act as a bus master or slave and appears as a device connected to the host EP bus. The RS-422 lines are used to provide processor interrupts from external sources which are translated on board, and sent to the processor over the EP bus.

3.1.5 The GT-SM8/1

The SM8 Module is built around a custom VLSI crossbar switch chip that has eight processor ports. Figure 2.1 allocates one to the Executive Processor Module, two to the Data Processor Module, and one to the Object Processor Module. A full configuration would add an additional Data Processor Module and two Object Processor Modules as shown in Figure 3.4. These could be swapped depending on requirements.

A high speed serial port and a PFP crossbar port are also provided on the SM8 module. The high speed port connects directly to the EP bus which is used to load the SM8 and the DP. The crossbar port can be used to connect the GN&C processor directly to a PFP unit, so that the

system simply appears as another node.

Initially the Georgia Tech prototype was to contain no 1553 bus. However, since Georgia Tech plans to test the AHAT processor, it was felt a 1553 bus interface was needed to make sure we had this capability in our test program. Since the GT internal architecture is not identical to AHAT, it was decided to design our own I/O interface chip and base it on one or two FPGAs. This would permit us to use a fast turnaround on our design with complete control of the design and implementation program. Also, since the board has been designed as a stand alone module it can be omitted when no longer needed.

3.1.6 The GT-S5EP/1

The GT-S5EP/1 is built from Georgia Tech's Executive Processor Chip set, consisting of 4 custom VLSI chips and external memory. The board can serve as the executive, or master processor in the system, an object processor, or any other computationally intensive function that requires a larger memory than a DP module can handle. Details on the EP chip set can be found in Volume 7 of this report.

An EP evaluation board has been built and is currently in testing. The GN&C module will contain the same circuitry, but require a new board layout and some modifications to meet the module format. The GN&C module layout will be completed as soon as the evaluation board has been fully tested.

3.1.7 The GT-S5DP/1

The GT-S5DP/1 is capable of supporting two data processing modules, each with an interface to the EP bus and each with an interface to the SM8 switch. Each DP is configured using four custom VLSI chips mounted on a daughter board. The daughter boards are then mounted to the base module. The DP modules are used for jobs requiring tight control loops and moderate memory requirements. Details on the DP chip set can be found in Volume 7 of this report.

A prototype S5DP board consisting of one DP daughter board and a crossbar interface has been built, integrated into the module stack, tested, and used in laboratory demonstrations. Schematics of this prototype are provided in Appendix A. The printed circuit version of the base module is in the design phase.

3.1.8 The GT-SPAT/1 and GT-GNCTST/1

The GT-SPAT/1 and GT-GNCTST/1 are a board set that allow a standard IBM AT or compatible machine to interface to the GN&C processor's EP bus and act as the bus master. The GT-SPAT/1 board is an AT add in board that resides inside the AT host, while the GT-GNCTST/1 plugs into the modular GN&C stack. All relevant EP bus signals are passed through a set of six 34 pin ribbon cables between the two boards. In addition, the GT-GNCTST/1 also contains an interface to the Seeker Scene Emulator for inputting pixel data to the SP boards. The GT-SPAT/1 board has been designed so that it can work anywhere in the host AT's I/O space by setting the right DIP switch combinations, but it is recommended that the board be set to

operate on the 300h to 31Fh I/O space. (This space has been set aside in the AT reference manual for prototype hardware, so possible overlap with other boards in the system can be minimized.) The board uses a total of 7 ports that serve to control and/or monitor various functions in the GN&C package. Schematics for both the GT-SPAT/1 and GT-GNCTST/1 are included in Appendix A.

The interface to the processor is established directly through an EP bus interface. All data, address, and control lines that are usually driven by the GT-S5EP/1 board are connected. Since there is a very large number of application programs and programming languages available for the AT, it can serve as a very flexible test station, and as a software development platform. While AT class machines do not run anywhere near the speeds of the Georgia Tech EP chip set, a large amount of functional testing has been accomplished using this configuration.

The GT-SPAT/1 interface is designed to communicate with all EP data, address, and status bits through data ports in the AT's I/O space. The EP data bus is designed for 32 bit data transfers, has 26 bits of address capability, requires monitoring of 18 status lines, and requires 15 control bits. The AT data bus is designed for 16 bit data transfers. The interface has been built so that these functions are divided over 7 separate I/O ports. The 32 bit data bus is divided among two 16 bit ports. The 26 bit address bus is divided among two 16 bit ports. The 18 status bits are divided among two 16 bit ports and the 15 control bits are set up as one port. Table 5 lists the port assignments and their respective addresses.

Table 5. GT-SPAT/1 Port Assignments

ADDRESS BIT	A9	A8	A7	A6	A5	A4	A3	A2	A1	A0	HEX
CONTROL WORD	1	1	0	0	0	0	0	0	0	0	0300
LOW DATA	1	1	0	0	0	0	0	0	1	0	0302
HIGH DATA	1	1	0	0	0	0	0	1	0	0	0304
LOW ADDRESS	1	1	0	0	0	0	0	1	1	0	0306
HIGH ADDRESS	1	1	0	0	0	0	1	0	0	0	0308
LOW STATUS	1	1	0	0	0	0	1	0	1	0	030A
HIGH STATUS	1	1	0	0	0	0	1	1	0	0	030C

Details on individual bit assignments within each I/O port are available in the GT-SPAT/1 reference manual. The functionality of each bit in each port is described, as well as the mapping of what bit that function has been assigned to.

3.1.9 The GT-VDSTST/1

The GT-VDSTST/1 (Video Data Stream TeST) has been designed to allow functional testing of the SP modules without requiring a seeker input. The board has been built and tested, and is currently use. The board consists of an EP bus interface, a 64K by 16 memory, a counter that generates memory addresses as well as the begin frame, begin row, end frame, and end row signals, clock generation circuitry, and an SP bus interface. The board can be inserted in the module stack in place of the GT-SSESP/1 and seeker, and be used to simulate seeker input. Four frames of 128 by 128 seeker data can be loaded into the board's memory by the host or executive processor over the EP bus. The counter circuitry is then activated by the host and the four frames are sent out repetitively until the counter is disabled. Scematics for the GT-VDSTST/1 are included in Appendix A.

The GT-VDSTST/1 eliminates the need for an external seeker input for functional testing, thus reducing the amount of test equipment needed and simplifying the programming effort. Once the the SP hardware has been funtionally verified, it can be tested at full speed with a complete image using the Seeker Scene Emulator.

Two sets of EP bus lines, the device select lines and address lines, are used to access the circuitry on the VDSTST board. Four device select lines, DS0 through DS4, are used to select the board. These lines asserted by the host must match an on board setting, which is programmed in an on board EPLD. The board is currently set as device number 4, but can be changed at any time by reprogramming the EP bus interface EPLD located in socket U6.

There are two modes of operation on the VDSTST, the load mode and run mode, which are selected by writing to a control bit. The control bit is located at data bit 0, of address 0x10000 when device 4 is selected. Setting the control bit to 0 puts the board on load mode, which allows the host to read and/or write any memory location on the board. Setting the control bit to 1 activates the on board address counter and enables the pixel data output on the SP bus. The control bit may be read or written at any time.

The VDSTST memory is sequentially accessed, as 16 bit words, from addresses 0x0000 through 0xFFFF when device 4 is selected and the board is in load mode. Any memory location can be read or written in any Table 6 lists the complete address map for the board:

Table 6. GT-VDSTST Memory Map

Function	DS3	DS2	DS1	DS0	Address A0-A15
Control Bit (*)	0	1	0	0	0x10000
Memory	0	1	0	0	0x00000 - 0x0FFFF

(*) Control Bit is D0 of data word. Control bit is set to 0 for load mode. Control bit is set to 1 for run mode.

Four frames of 128 by 128 image data are loaded into a 64k deep memory as 16 bit words. The frame is loaded sequentially by rows, with the first pixel of the first frame loaded to address 0x00001 and the last pixel of the first frame loaded at 0x04000. The other three frames are loaded similarly, as shown in Table 7. Frame 4 has one minor exception. The begin frame pulse, which occurs on an all 0 count from the address generation counter for frame 1, must occur one pixel clock cycle before the first pixel data. This causes the data skew so that the first pixel is loaded to location 0x00001 instead of location 0x00000, with the result being that the last pixel is "wrapped around" and loaded at location 0x00000.

Table 7. Frame Load Addressing

Frame Number	Starting Pixel Address	Ending Pixel Address
1	0x0001	0x4000
2	0x4001	0x8000
3	0x8001	0xC000
4	0xC000	0x0000

3.1.10 Stand Alone Testing

Using the GT-VDSTST/1, GT-SPAT/1, and GT-GNCTST/1 and an IBM AT or AT compatible machine as a host, a stand alone test facility exists for module development, debug, and testing which is outside of the DETL secure area. Focal Plane Array test patterns can be generated and loaded into the VDSTST board, processed through the SP modules, DP modules, and EP modules. This alternative testing ability allows new boards to be tested and debugged, and new software algorithms developed, while working boards are available for use in the closed loop simulation and testing.

4. PFP/GN&C/SSE Integration for Emulation and Testing

As stated in the introduction, the primary purpose of the DETL facility is for

simulation/emulation and hardware in the loop testing. A six degree of freedom simulation called EXOSIM, described in detail in Volume 3 of this report, has been implemented on the PFP and served as the base for a hardware in the loop demonstration.

4.1 EXOSIM Closed Loop Demonstration

The EXOSIM closed loop demonstration showcased the PFP and SSE systems' abilities as real time test equipment, with the prototype GN&C processor as the article under test. The EXOSIM engagement contains an interceptor with a staring array seeker and one or more objects in the threat. Real time emulation is possible without special purpose seeker hardware if a simple seeker is modeled and only one or two objects are used. For a real staring array and multiple objects, the processing demands are too large for the processors currently used in the PFP, thus requiring the use of the SSE. Interfaces were developed and implemented so that the SSE fed image data directly into the GN&C processor, and so the GN&C processor could send object data directly to the PFP for tracking. Figure 3.5 illustrates the configuration that was used and the interfaces that were developed.

5. New Developments

5.1 Support for Other Programs

5.1.1 AHAT Testing

Preliminary plans are to bring a Harris built radiation hardened processor based on the Georgia Tech GN&C chip set (the AHAT processor), to the DETL for testing. The Harris AHAT GN&C Processor and the Georgia Tech processor will have the same interfaces and are functionally similar. The AHAT Processor contains 3 EPs, SM8, SP, Gris Gamma rejection, 1553 interface, IOS, RS-422 discrete I/Os and memory.

Harris plans to use the 1553 bus for all external I/O programming on AHAT. All devices external to the processor will interface to the 1553 bus through isolation transformers. The 1553 inside the processor is controlled by a bus master. For any external device to send data to the processor requires an interrupt which will generate a read by the processor on a particular device such as the IMU. Other interrupts, such as end-of-row or end-of-frame are generated by the FPA. All of these interrupt and signal lines are passed over the RS-422 bus.

Internal to the processor, Harris has developed a custom I/O chip to resolve the data traffic issues. The I/O chip maps all of the 1553 structure into the EP memory. The EP can then be programmed to sort and distribute the incoming data and to send out data with the correct destination address.

Discrete events generated by external signals will use the RS-422 bus. Most will terminate at the EP, but some will go to the 1553 I/O interface. Discrete outputs will be generated by the EP and sent over the RS-422 bus to external devices.

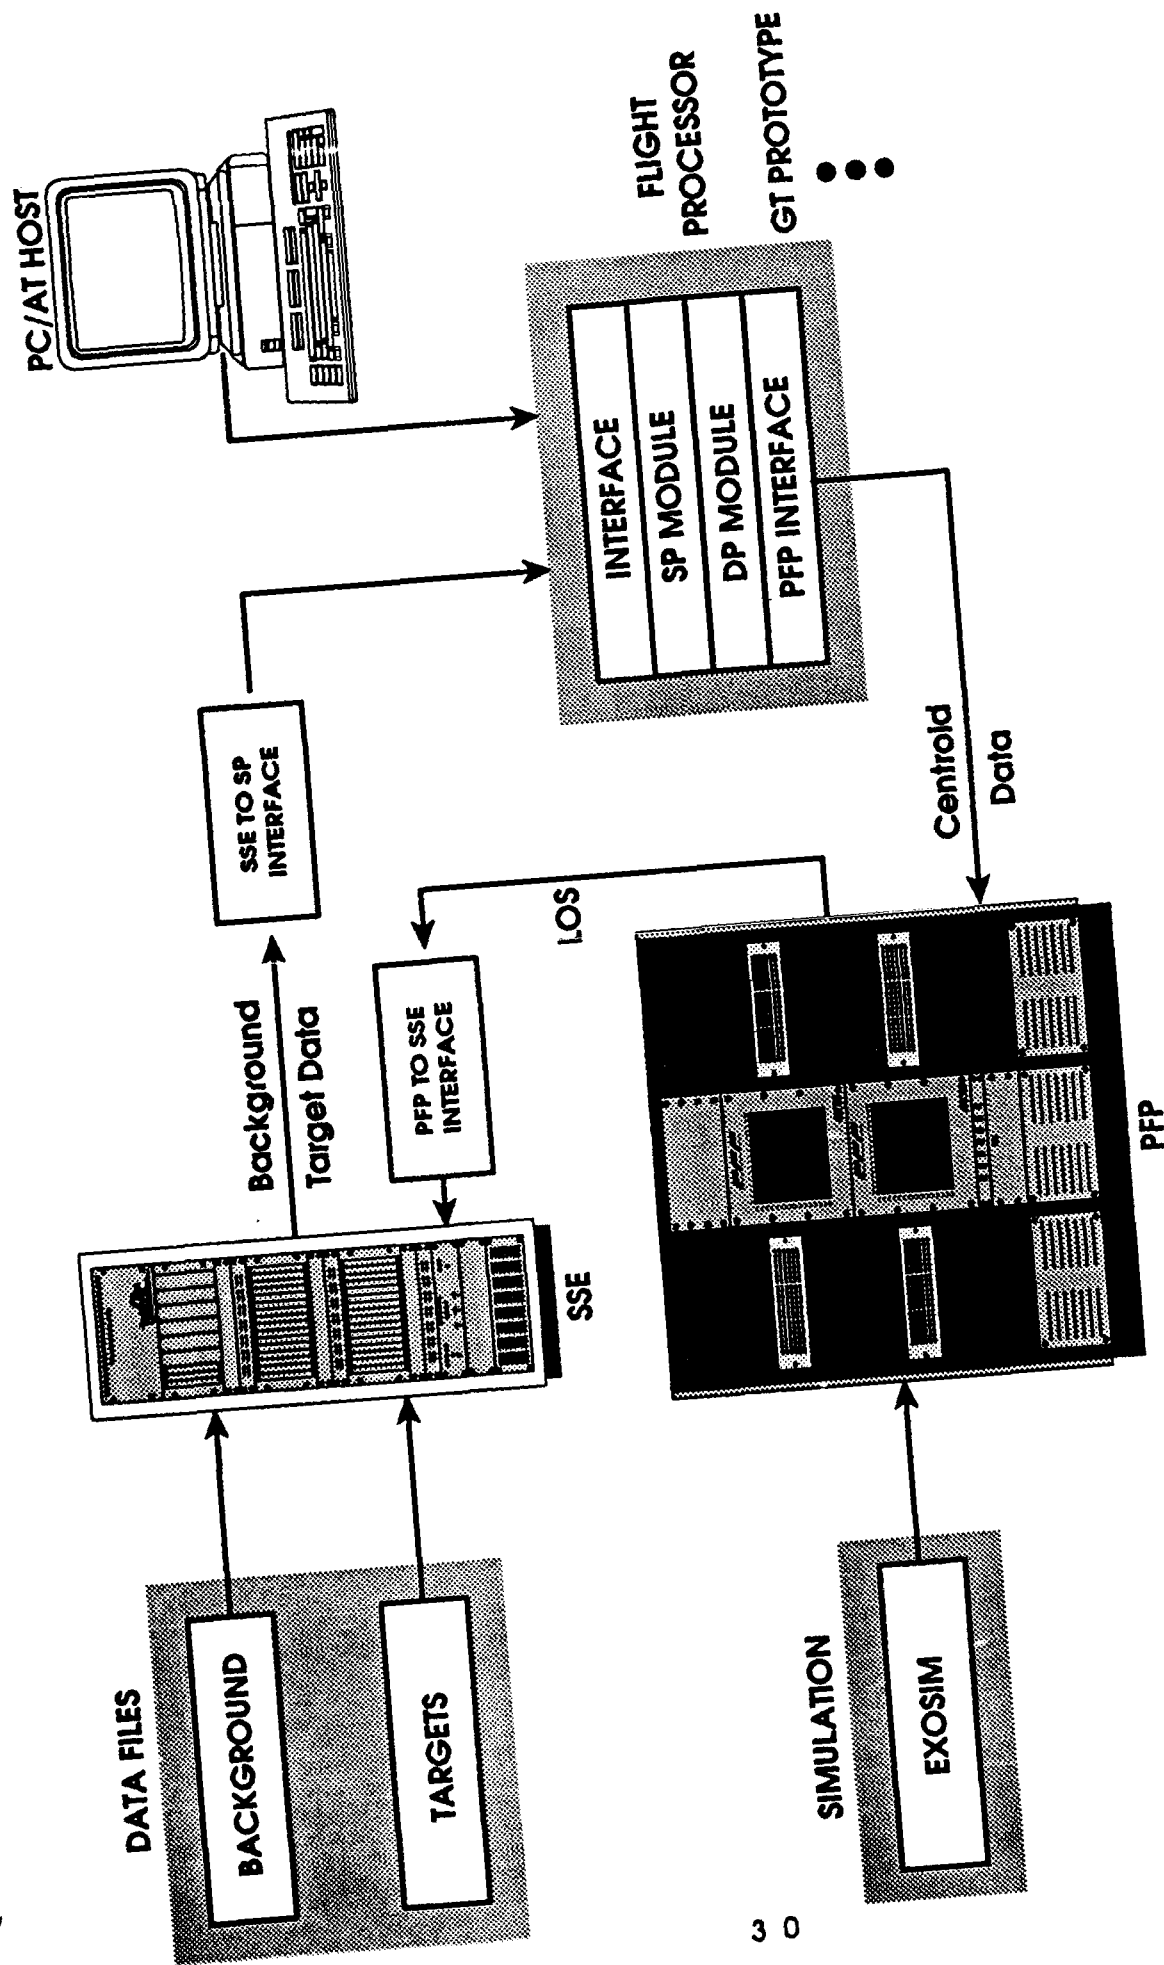


Figure 3.5
DETL Configuration for the EXOSIM Closed Loop Demonstration

5.1.2 GBI/LEAP/E²I

GBI, LEAP, and E²I are all examples of programs that the PFP and DETL facility are equipped to support. Using the EXOSIM work and partitioning experience as a starting point, real time parallel simulations for any of these programs could be developed. The initial partitioning could be developed at Georgia Tech and then shipped to the KDEC facility, where KDEC personnel and contractors could use these programs for analysis, modify and refine them, and gradually move into the parallel simulation/emulation field.

5.2 Planned Developments

The emphasis for this reporting period has been in developing applications to run on the PFP, and in the design and integration of the GN&C processor. The knowledge and experience gained through working these phases of the program has added new insight that can be translated into improvements for the PFP system. Since the system architecture is very modular, the improvements can be made in incremental steps so that the system never becomes completely outdated and the system components and software are used for their full life span.

5.2.1 New Crossbar

The objectives of a new crossbar are to increase the transfer speed, increase the number of ports on a single crossbar, and decrease the size of the unit. Two alternatives are under study, with preliminary designs under way on each. The first plan is to build the new crossbar so that it still requires a master state machine like the such as the sequencer. The second plan is to build the new crossbar that is dynamically reconfigurable so that the need for the master sequencer is eliminated.

Several implementation alternatives have been examined for the crossbar that still requires a separate sequencer. A literature search on the commercially available crossbar switch chips has been undertaken, including several GaAs components. Many of the silicon based components are quoting very fast transfer rates once the part has been configured, but the time required to load the next configuration into the part and switch the connections restricts the applicability of these. In effect, it takes much longer to load the next configuration set up into the chip than it does to carry out most transfers. A custom designed 64 port non blocking VLSI crossbar chip appears to have the advantage over all of these because the configuration time is much less, since the chip has been designed to load much of the configuration information in parallel. This chip is presently the first choice for implementation. The GaAs based components are extremely fast, but are also extremely expensive, the available parts selection is still very limited, they are mostly available in surface mount components with non-standard pin spacings, they run from voltages that are not always consistent with TTL levels, and often are not consistent with GaAs voltage levels from different manufacturers.

The sequencer-less implementation is based on Inmos' new C104 switch. This chip contains an on chip dynamic routing strategy for sending messages. While the elimination of the sequencer simplifies the hardware, the software overhead is increased. Each message is divided into 32 byte packets and each packet must have a header on it specifying destination information.

If the data transferred between processors is very long, then this overhead information appears minimal. However, if the message is only several words, then the overhead information can dominate, so that the actual transfer time is much longer than the quoted peak rates. Since the implementation of this alternative is very straightforward, a prototype implementation is currently in the design process.


5.2.2 New Sequencer

Desired improvements in the current sequencer include increased speed, support for interrupts from the processor array, looping and branching capability within the sequencer code, support for variable length data transfers, and increased degugging capability including a single step mode. A new design incorporating these features is currently under way. The objective of this next version will be to build a sequencer that is a plug in replacement for the existing sequencer, but contains these added features. Some features, such as interrupt capability from a processor, must also be implemented at the processor end. New processor work is also under development, so that the newer processors would be able to take advantage of this feature.

5.2.3 New Processor/Crossbar Interface

The current PFP system has been able to support a number of commercially available processors which contain the Intel standard iSBX port. Several versions of a crossbar interface that plug on to an iSBX connector have been built, and are currently in use. In order to take full advantage of the increased crossbar and sequencer features that have been discussed, new standard interfaces will also be designed. In addition, a standard Multibus base board capable of accepting processor modules is also in development. This approach is described in Volume X of this report.

Figure 6.1. Schedule for GNC Development and PPP Integration

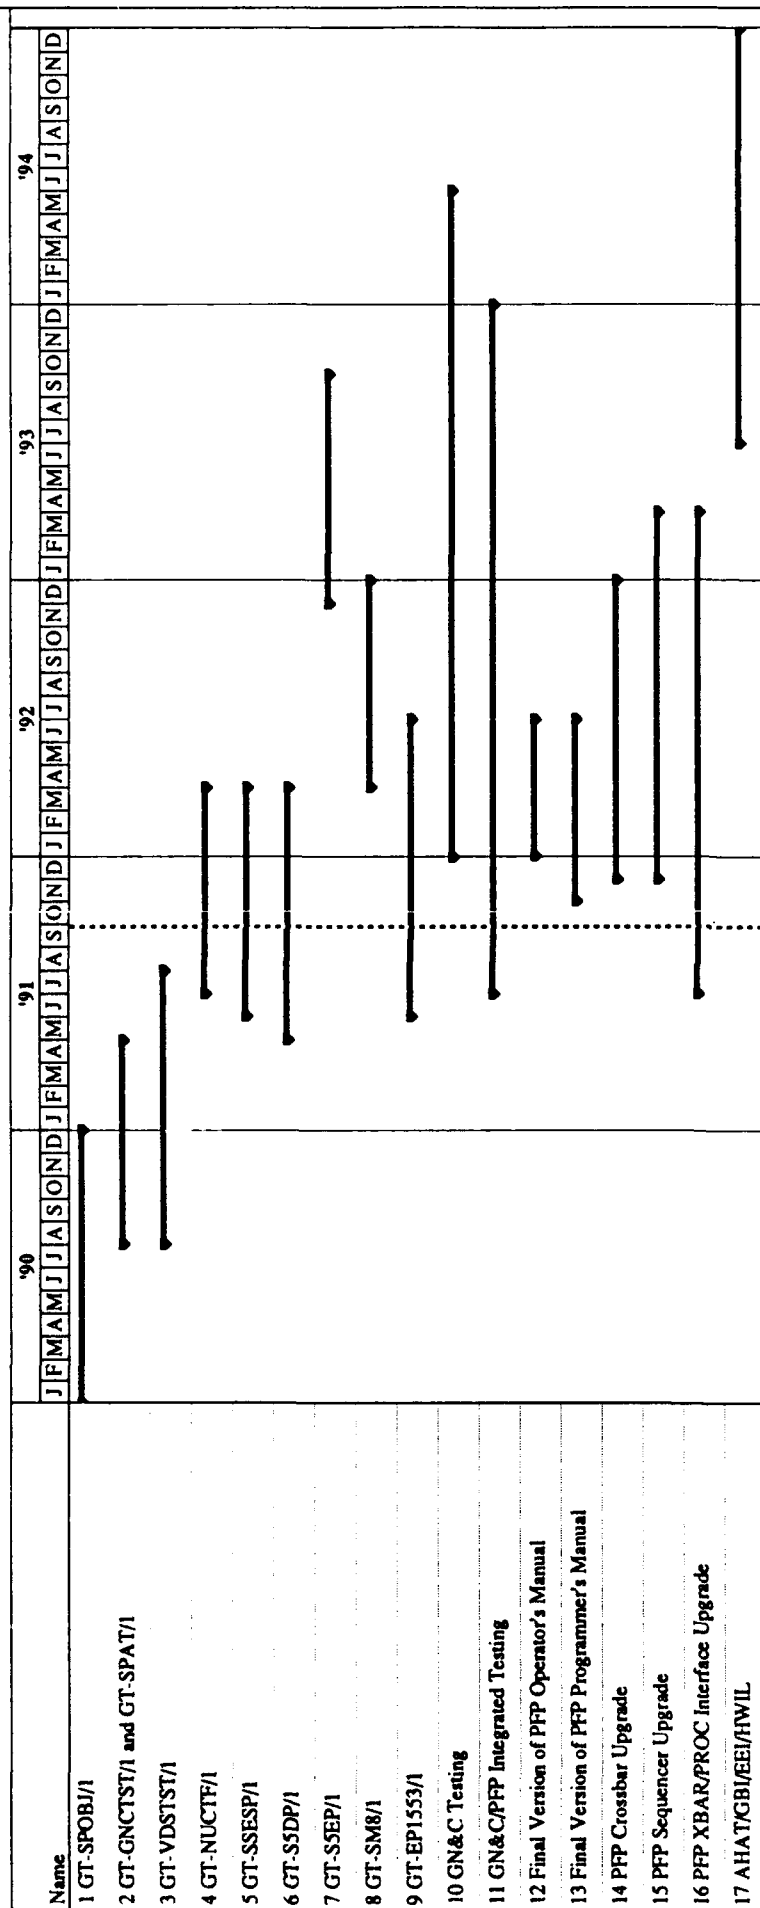



7. References

1. Woods, M, Parallel Function Processor Hardware Operation, *Computer Engineering Research Laboratory Special Technical Report*, STR-0142-90-005.2, Georgia Institute of Technology, submitted to the United States Army Strategic Defense Command for contract DASG60-89-C-0142, (March 1991).
2. Collins, Thomas R., et al, *Computer Engineering Research Laboratory Final Technical Report*, Volume 1, Georgia Institute of Technology, submitted to the United States Army Strategic Defense Command for contract No. DASG60-85-C-0041, (July 1989).
3. Woods, M., Pitts, R., and Bingham, P., Parallel Function Processor Development, *Computer Engineering Research Laboratory Annual Report*, Volume 4, Georgia Institute of Technology, submitted to the United States Army Strategic Defense Command for contract DASG60-89-C-0142, (August 1990).
4. Woods, M, et. al., Parallel Function Processor Technical Data Package, *Computer Engineering Research Laboratory*, Georgia Institute of Technology, submitted to the United States Army Strategic Defense Command for contract DASG60-89-C-0142, (March 1990).
5. Pitts, R., Parallel Function Processor Programmer's Manual, *Computer Engineering Research Laboratory Special Technical Report*, STR-0142-90-006.1, Georgia Institute of Technology, submitted to the United States Army Strategic Defense Command for contract DASG60-89-C-0142, (May 1990).
6. Alford, C., Abler, R., Register, A., and Tan, W., Hardware in the Loop Testing of KEW Flight Processors, *Proceedings of the 1990 Summer Computer Simulation Conference*, Calgary, Alberta, Canada, (July 1990), pp. 938-943.

8. Appendix A: Schematics



GT-SSESP/1 SCHEMATICS

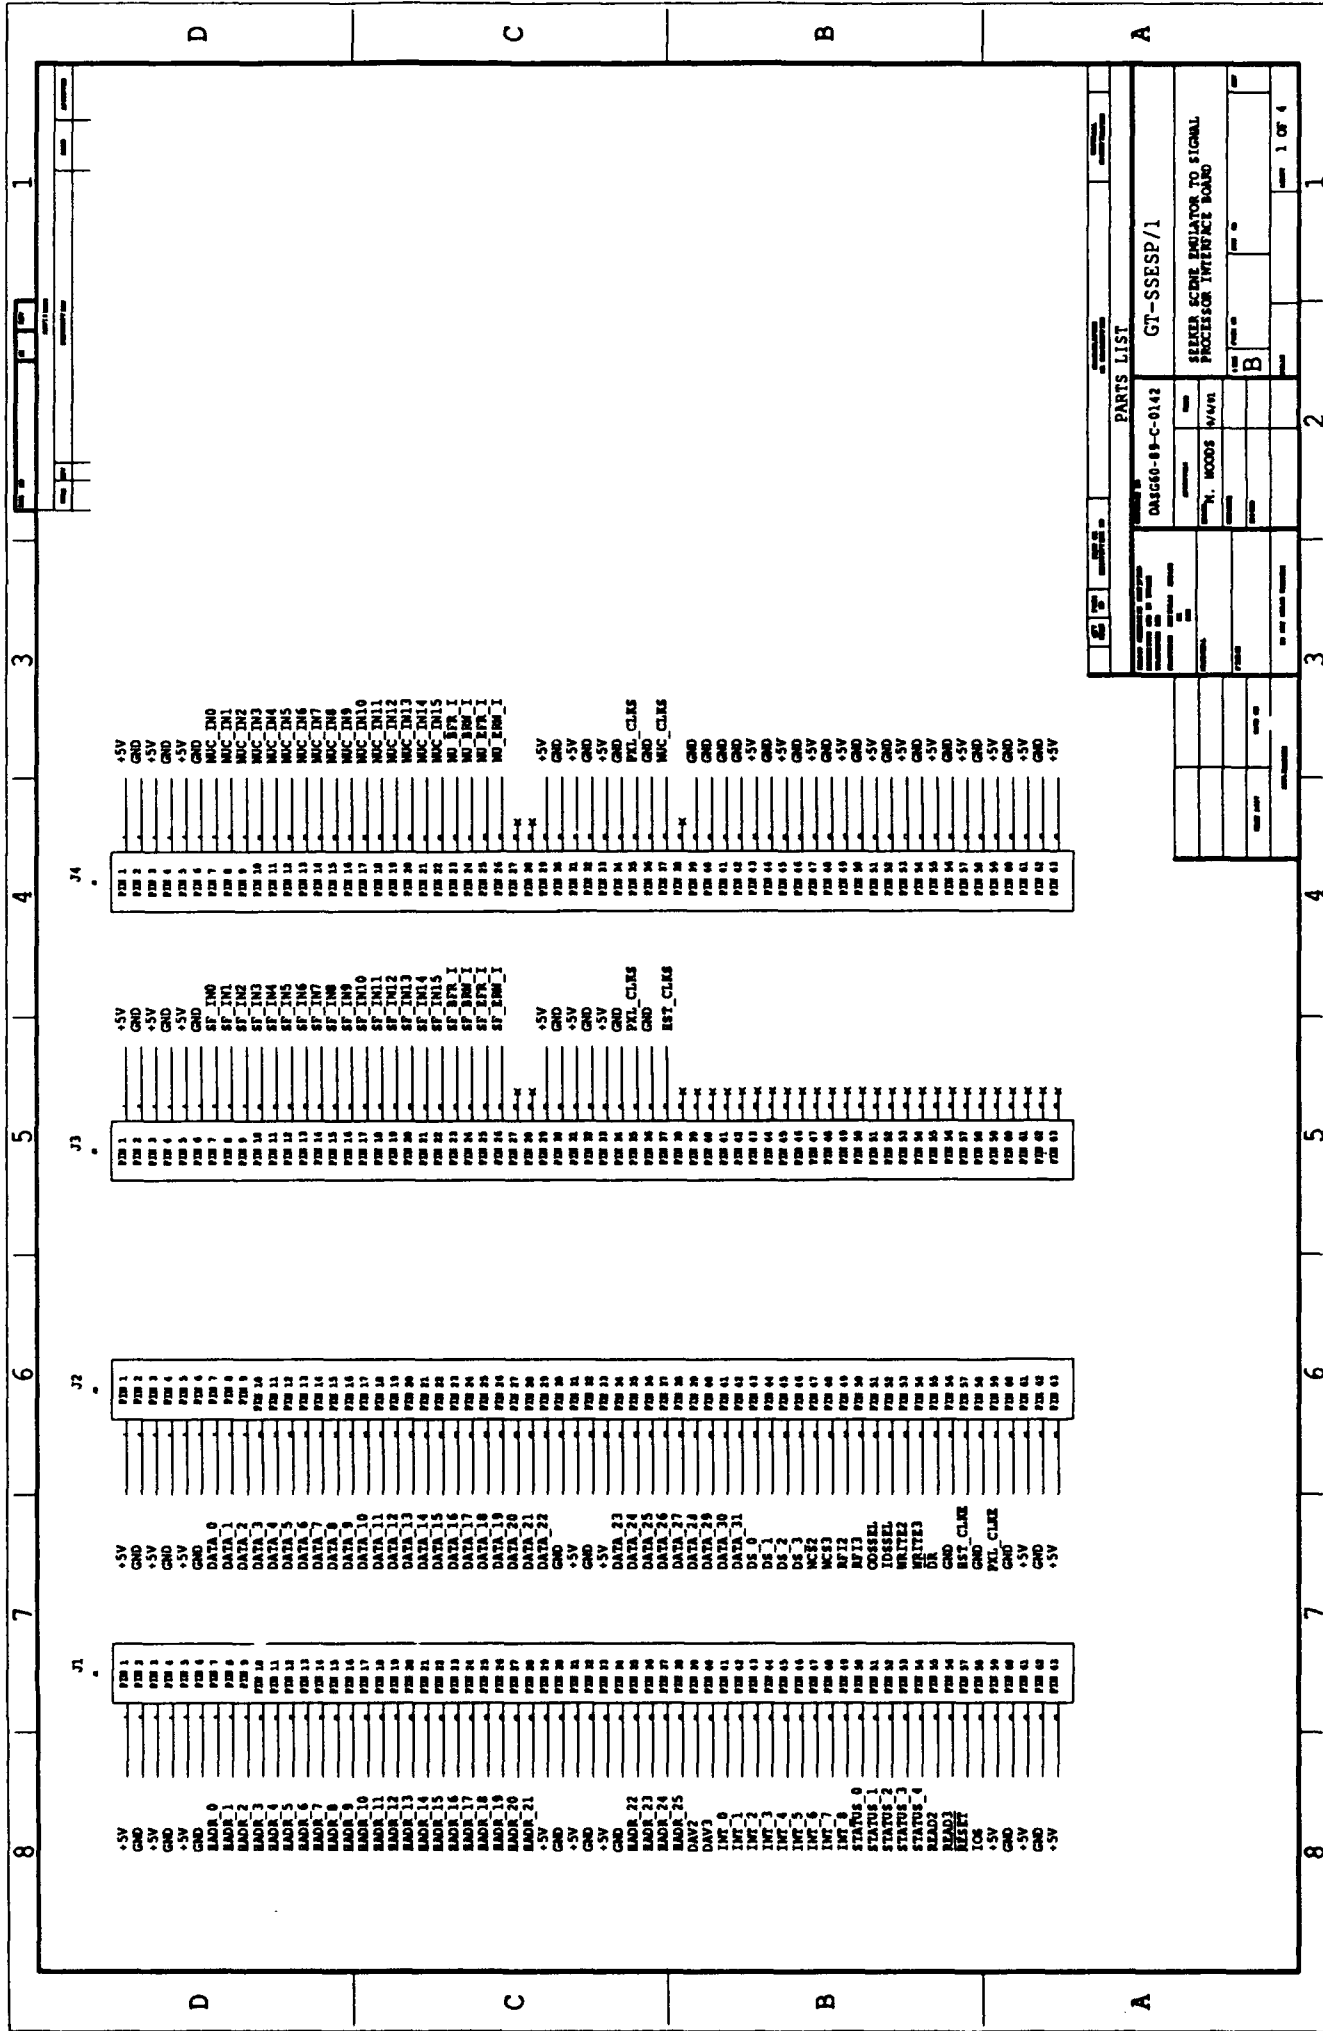

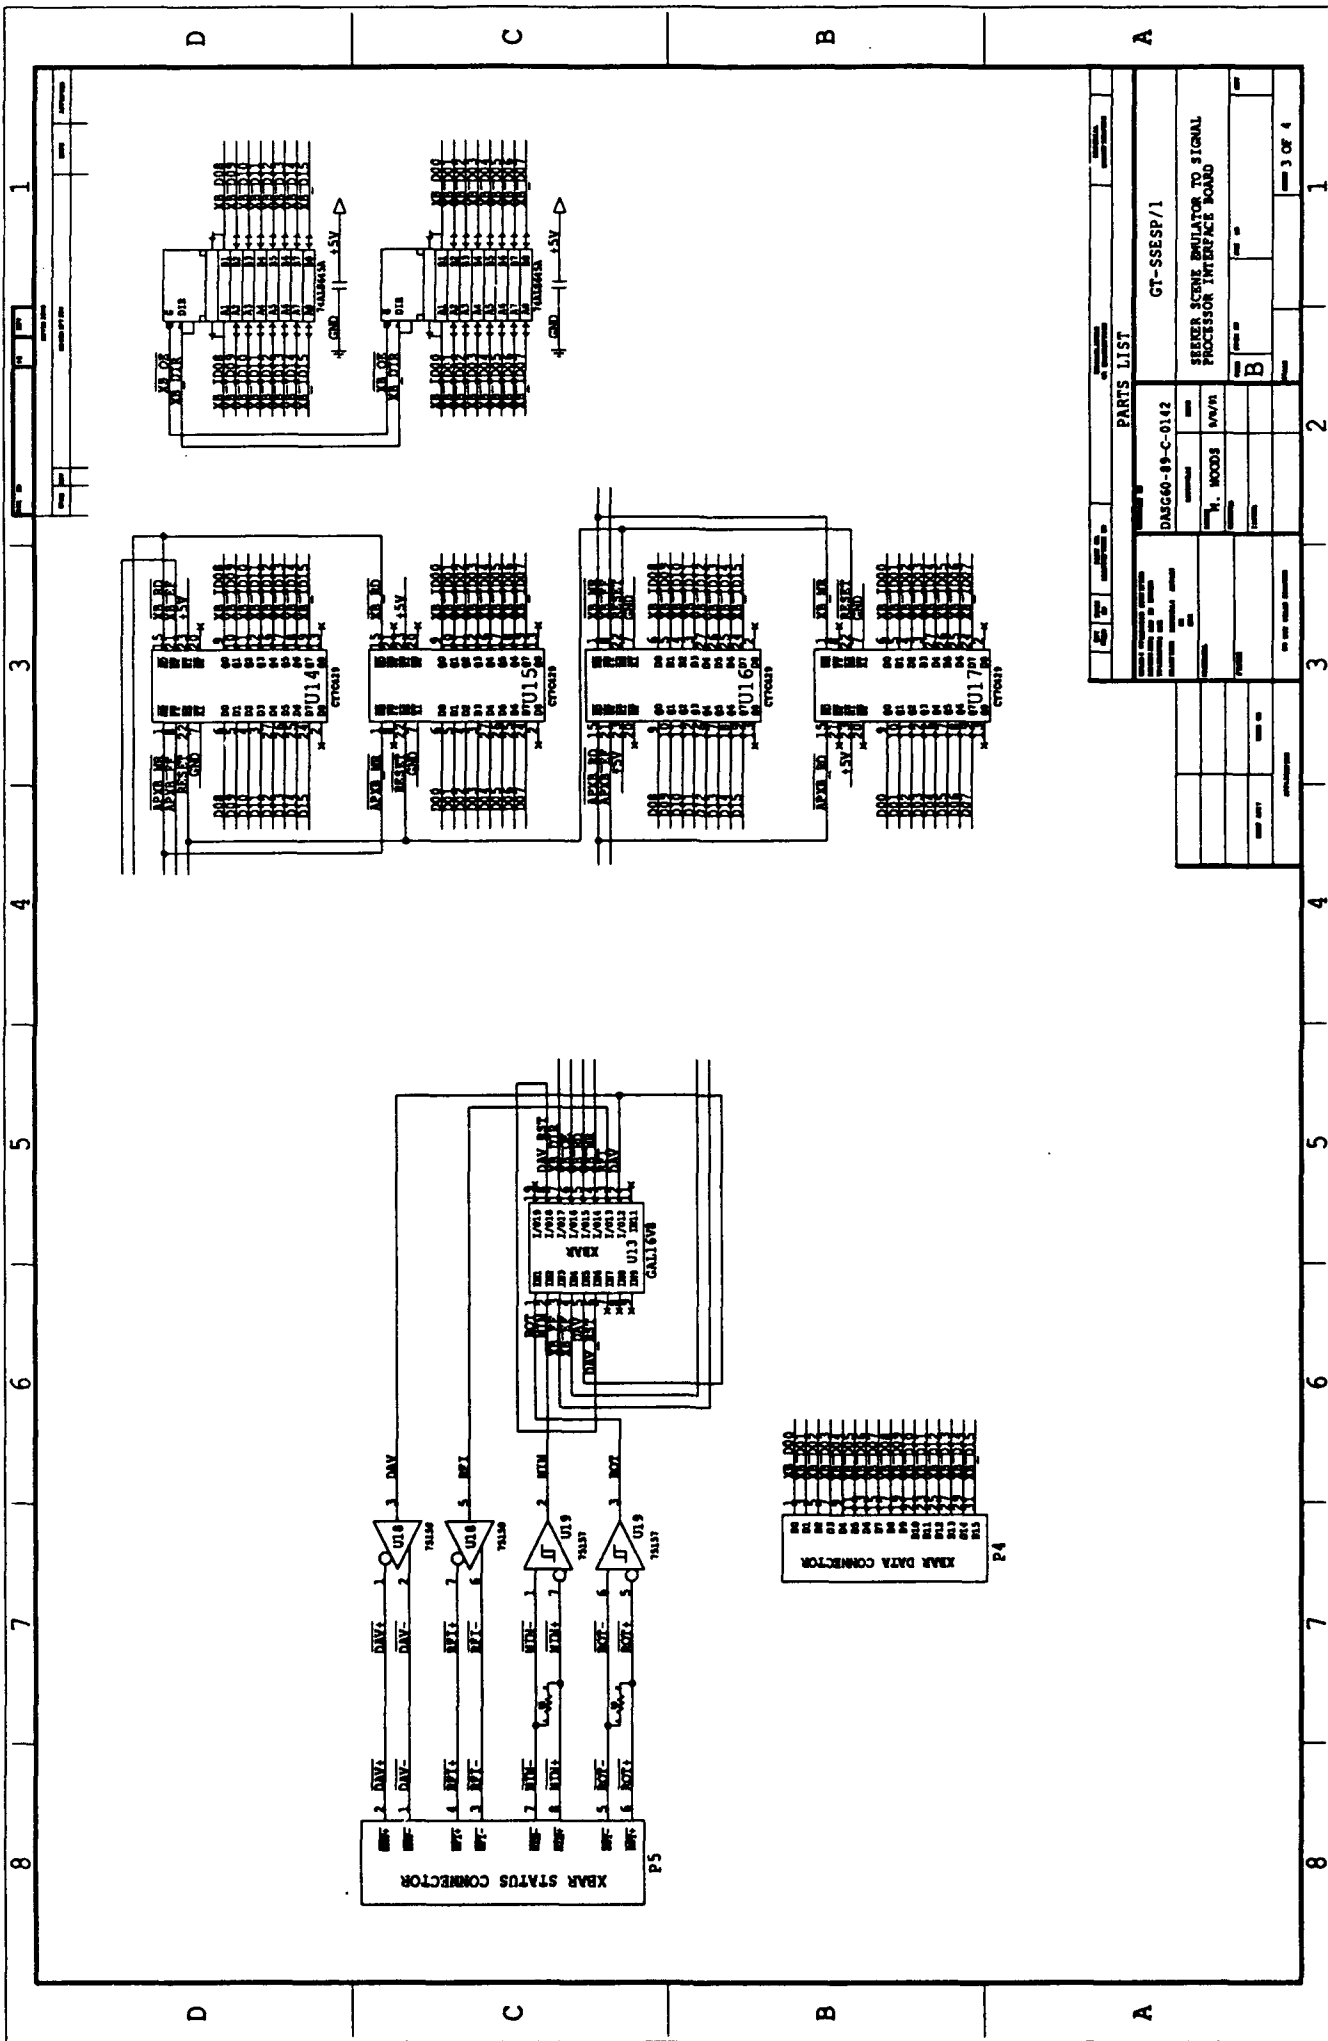

DATE		TIME		PAGE NO.		PAGE TOTAL		PAGE NO.		PAGE TOTAL	
						PARTS LIST					
ITEM NO. DESCRIPTION QUANTITY UNIT REMARKS						ITEM NO. DESCRIPTION QUANTITY UNIT REMARKS					
DAGC40-89-C-0142						GT-SSESP/I					
WOODS						SEEKER SCENE BRULATOR TO SIGNAL PROCESSOR INTERFACE BOARD					
B						B					
3 OF 4						3 OF 4					

8 7 6 5 4 3 1

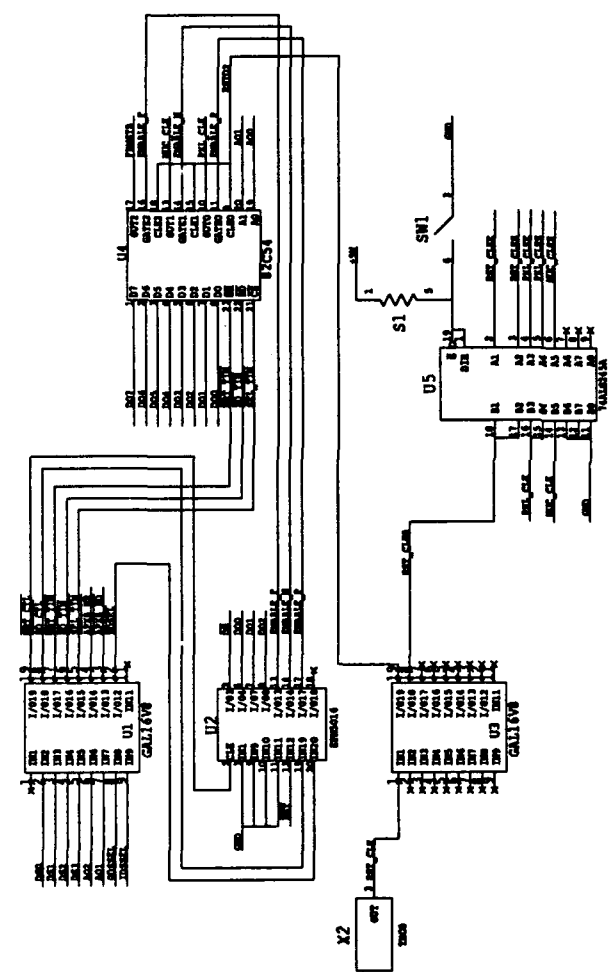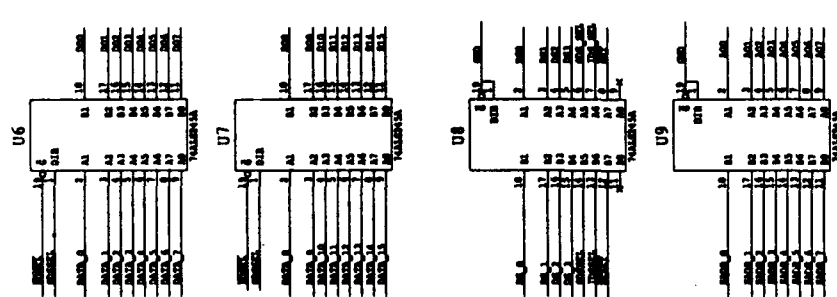

PARTS LIST			
QTY	DESCRIPTION	REVISION	DATE
1	GT-SSESP/1		
1	SEAKER STIME EMULATOR TO SIGNAL		
1	PROFESSION INTERFACE BOARD		
1	H. MOORE	1/8/11	
1	GT-SSESP/1		
1	SEAKER STIME EMULATOR TO SIGNAL		
1	PROFESSION INTERFACE BOARD		
1	H. MOORE	1/8/11	
1	GT-SSESP/1		
1	SEAKER STIME EMULATOR TO SIGNAL		
1	PROFESSION INTERFACE BOARD		
1	H. MOORE	1/8/11	

1 2 3 4 5 6 7 8

NAME hostint;
Partno 000;
Date 09/16/91;
Revision 0.0;
Designer Dr. Michael B. Woods;
Company Cerl, Georgia Tech;
Assembly GT-SSESP/1 Seeker Scene Emulator to Signal Processor Interface;
Location GAL3;
Device G16V8;

/* Input */

Pin 1 = hst_clk;
Pin 2 = ds0;
Pin 3 = ds1;
Pin 4 = ds2;
Pin 5 = ds3;
Pin 6 = a2;
Pin 7 = a3;
Pin 8 = odssel;
Pin 9 = idssel;

/* Output */

Pin 12 = bd_sel;
Pin 13 = !xb_rd;
Pin 14 = !xb_wrt;
Pin 15 = !tim_sel;
Pin 16 = !tim_rd;
Pin 17 = !tim_wrt;
Pin 18 = ctl_rd;
Pin 19 = ctl_wrt;


/* Intermediate Variable Definitions */


bdsel (!ds0 & !ds1 & ds2 & ds3)

/* Logic Equations */

bd_sel = bdsel;
xb_rd = bdsel & a3 & !a2 & !odssel & idssel;
xb_wrt = bdsel & a3 & !a2 & odssel & !idssel;
tim_sel = bdsel & !a3 & a2;
tim_rd = bdsel & !a3 & a2 & !odssel & idssel;
tim_wrt = bdsel & !a3 & a2 & odssel & !idssel;
ctl_rd = bdsel & !a3 & !a2 & !odssel & idssel;
ctl_wrt = bdsel & !a3 & !a2 & odssel & !idssel;

GT-NUCTF/1 SCHEMATICS

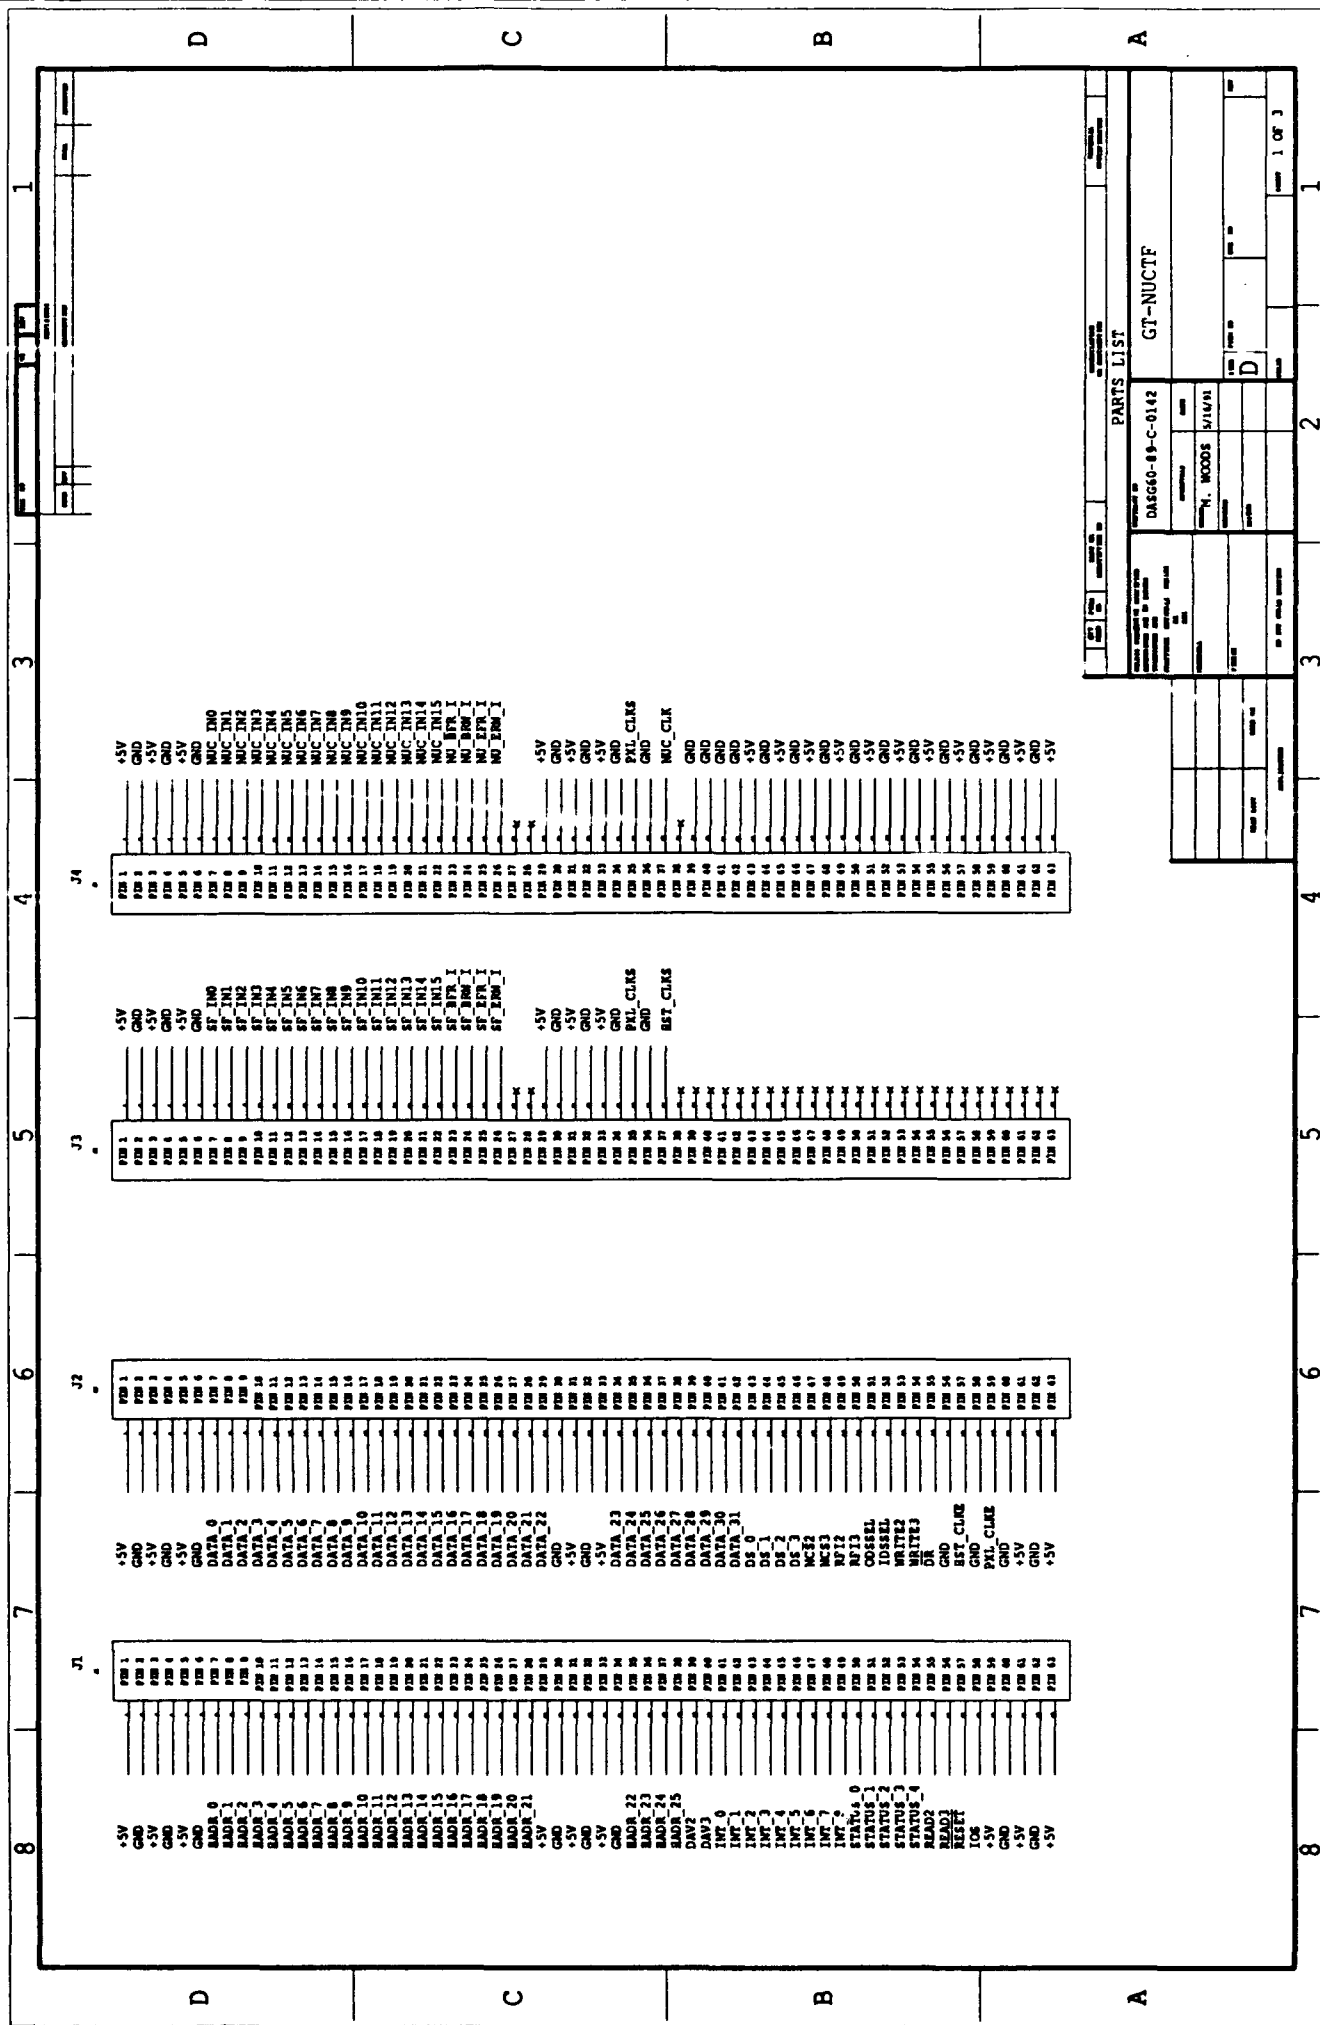

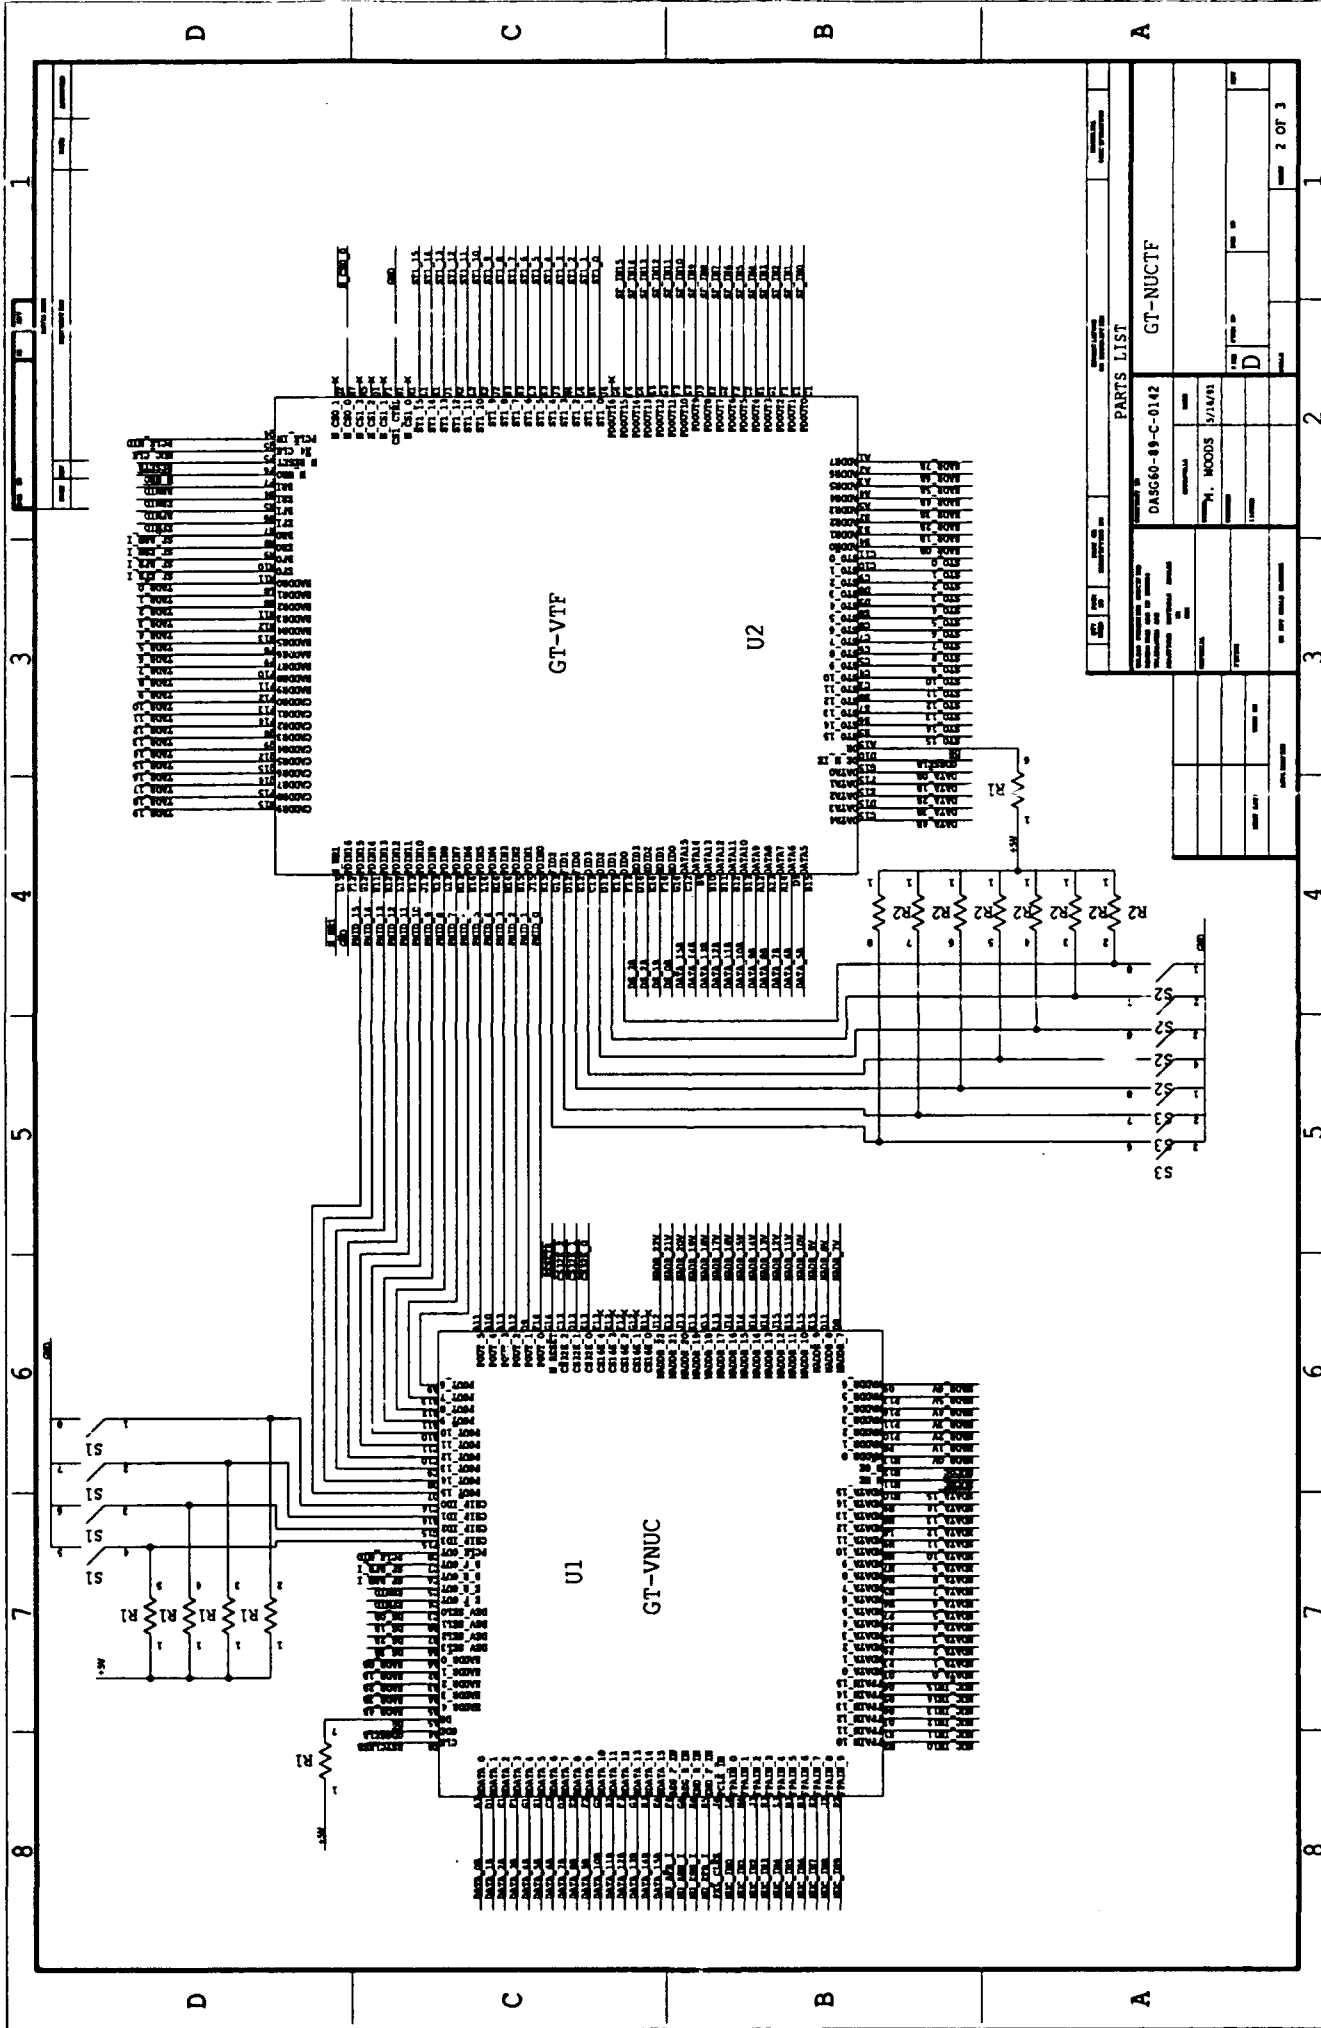

GT-SPOBJ/1 SCHEMATICS

1 3 4 5 6 7 8

D


C

B

A

Note: Pull up resistors are 2.2K 10 pin SIPs,
pin 1 common.

PULL CLK

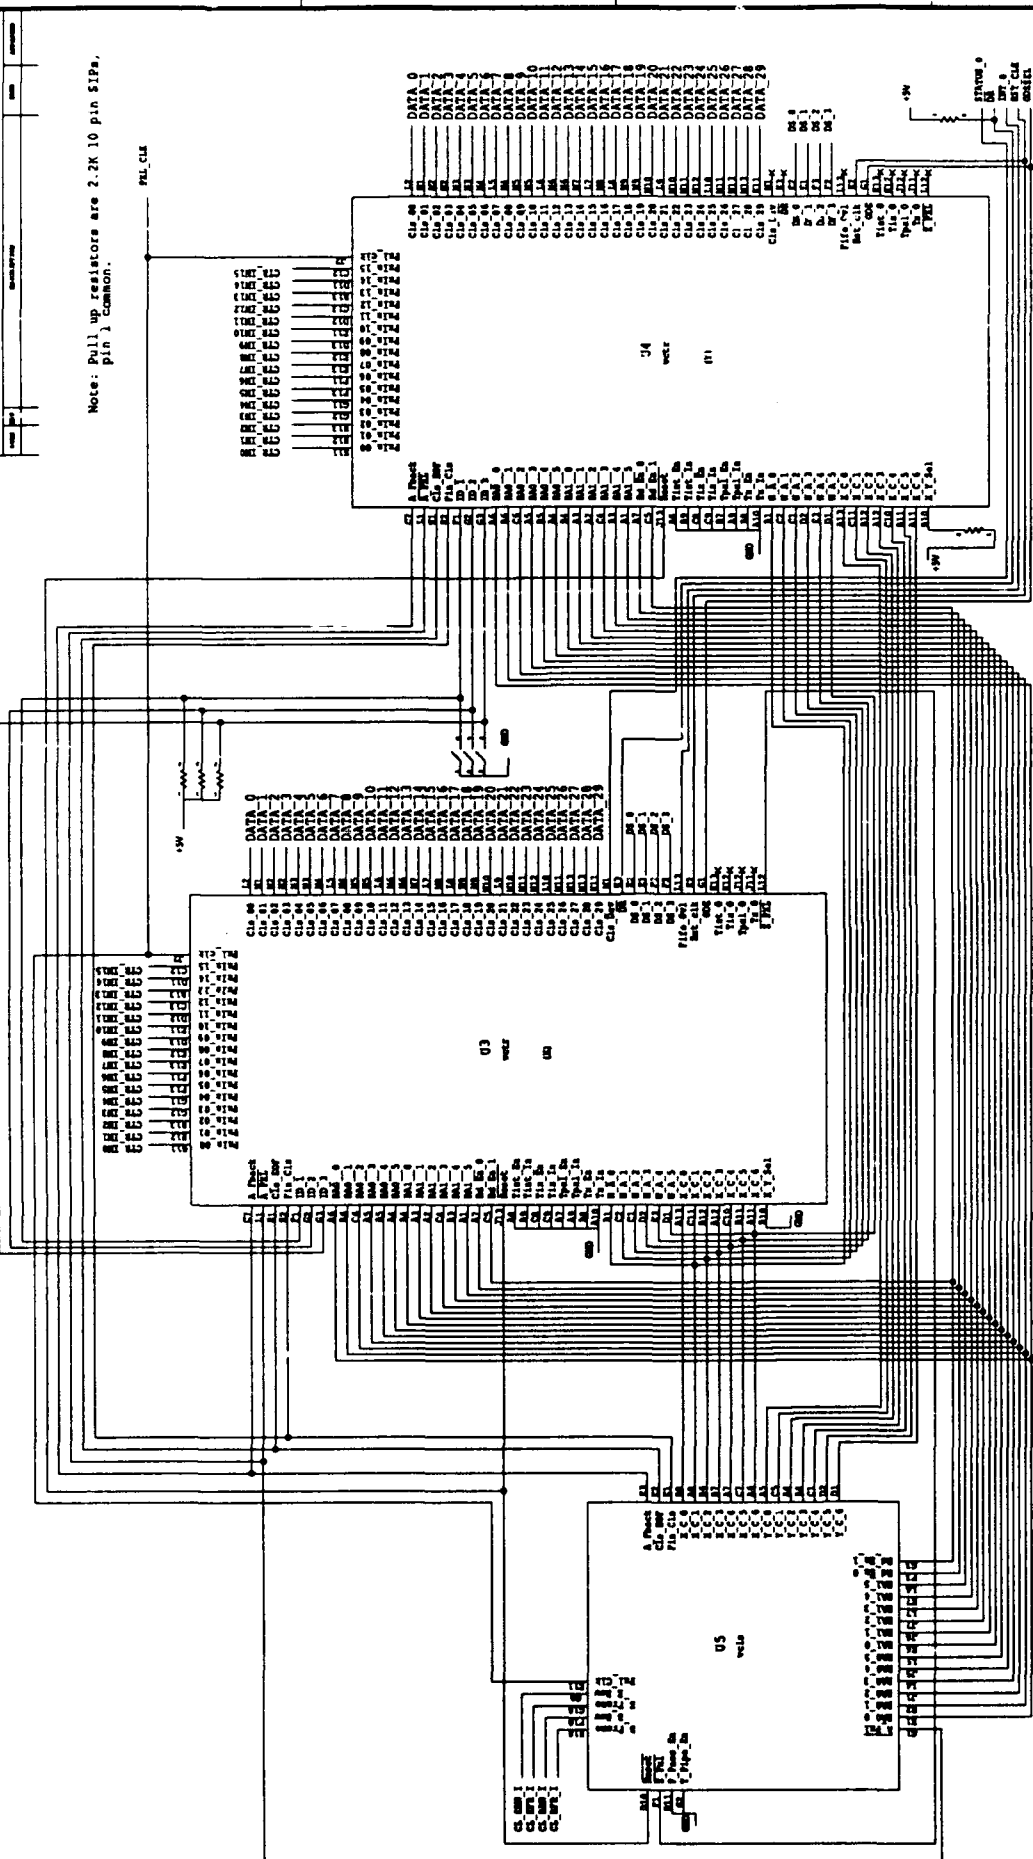

PARTS LIST

QTY	DESCRIPTION	QTY	DESCRIPTION
1	U3 74181 ALU	1	U4 74181 ALU
1	U5 74180 MAJ	1	U6 74181 ALU
1	U7 74181 ALU	1	U8 74181 ALU
1	U9 74181 ALU	1	U10 74181 ALU
1	U11 74181 ALU	1	U12 74181 ALU
1	U13 74181 ALU	1	U14 74181 ALU
1	U15 74181 ALU	1	U16 74181 ALU
1	U17 74181 ALU	1	U18 74181 ALU
1	U19 74181 ALU	1	U20 74181 ALU
1	U21 74181 ALU	1	U22 74181 ALU
1	U23 74181 ALU	1	U24 74181 ALU
1	U25 74181 ALU	1	U26 74181 ALU
1	U27 74181 ALU	1	U28 74181 ALU
1	U29 74181 ALU	1	U30 74181 ALU
1	U31 74181 ALU	1	U32 74181 ALU
1	U33 74181 ALU	1	U34 74181 ALU
1	U35 74181 ALU	1	U36 74181 ALU
1	U37 74181 ALU	1	U38 74181 ALU
1	U39 74181 ALU	1	U40 74181 ALU
1	U41 74181 ALU	1	U42 74181 ALU
1	U43 74181 ALU	1	U44 74181 ALU
1	U45 74181 ALU	1	U46 74181 ALU
1	U47 74181 ALU	1	U48 74181 ALU
1	U49 74181 ALU	1	U50 74181 ALU
1	U51 74181 ALU	1	U52 74181 ALU
1	U53 74181 ALU	1	U54 74181 ALU
1	U55 74181 ALU	1	U56 74181 ALU
1	U57 74181 ALU	1	U58 74181 ALU
1	U59 74181 ALU	1	U60 74181 ALU
1	U61 74181 ALU	1	U62 74181 ALU
1	U63 74181 ALU	1	U64 74181 ALU
1	U65 74181 ALU	1	U66 74181 ALU
1	U67 74181 ALU	1	U68 74181 ALU
1	U69 74181 ALU	1	U70 74181 ALU
1	U71 74181 ALU	1	U72 74181 ALU
1	U73 74181 ALU	1	U74 74181 ALU
1	U75 74181 ALU	1	U76 74181 ALU
1	U77 74181 ALU	1	U78 74181 ALU
1	U79 74181 ALU	1	U80 74181 ALU
1	U81 74181 ALU	1	U82 74181 ALU
1	U83 74181 ALU	1	U84 74181 ALU
1	U85 74181 ALU	1	U86 74181 ALU
1	U87 74181 ALU	1	U88 74181 ALU
1	U89 74181 ALU	1	U90 74181 ALU
1	U91 74181 ALU	1	U92 74181 ALU
1	U93 74181 ALU	1	U94 74181 ALU
1	U95 74181 ALU	1	U96 74181 ALU
1	U97 74181 ALU	1	U98 74181 ALU
1	U99 74181 ALU	1	U100 74181 ALU

1 2 3 4 5 6 7 8


D

C

B

A

1 of 3

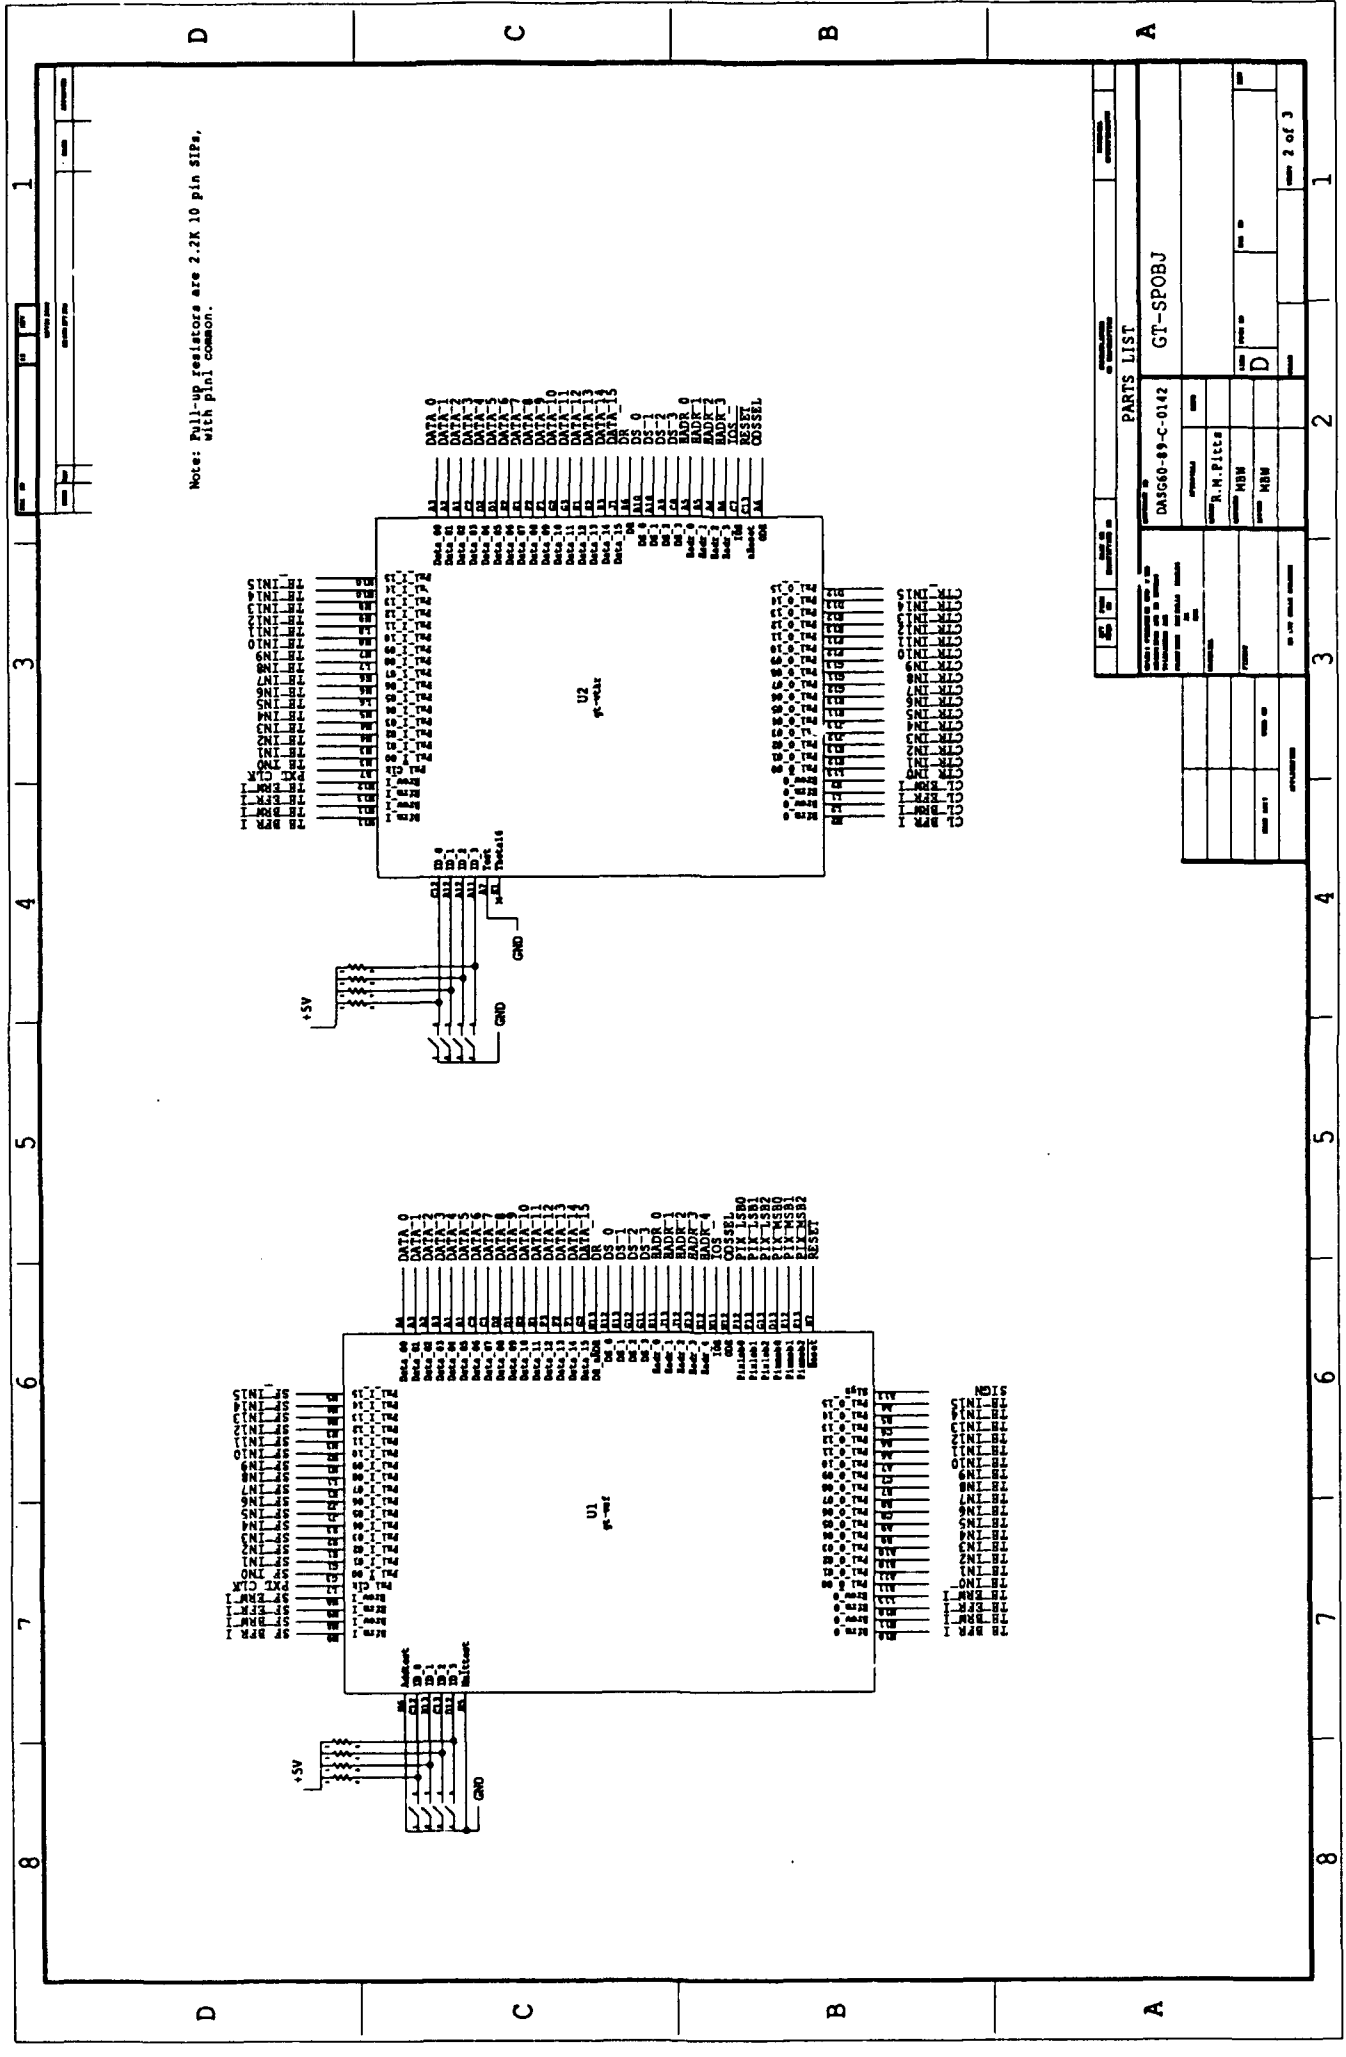


Note: Pull-up resistors are 2.2K 10 pin SIPs, with pin 1 common.




PARTS LIST			
Q1	74181	1	1
Q2	74181	1	1
Q3	74181	1	1
Q4	74181	1	1
Q5	74181	1	1
Q6	74181	1	1
Q7	74181	1	1
Q8	74181	1	1
Q9	74181	1	1
Q10	74181	1	1
Q11	74181	1	1
Q12	74181	1	1
Q13	74181	1	1
Q14	74181	1	1
Q15	74181	1	1
Q16	74181	1	1
Q17	74181	1	1
Q18	74181	1	1
Q19	74181	1	1
Q20	74181	1	1
Q21	74181	1	1
Q22	74181	1	1
Q23	74181	1	1
Q24	74181	1	1
Q25	74181	1	1
Q26	74181	1	1
Q27	74181	1	1
Q28	74181	1	1
Q29	74181	1	1
Q30	74181	1	1
Q31	74181	1	1
Q32	74181	1	1
Q33	74181	1	1
Q34	74181	1	1
Q35	74181	1	1
Q36	74181	1	1
Q37	74181	1	1
Q38	74181	1	1
Q39	74181	1	1
Q40	74181	1	1
Q41	74181	1	1
Q42	74181	1	1
Q43	74181	1	1
Q44	74181	1	1
Q45	74181	1	1
Q46	74181	1	1
Q47	74181	1	1
Q48	74181	1	1
Q49	74181	1	1
Q50	74181	1	1
Q51	74181	1	1
Q52	74181	1	1
Q53	74181	1	1
Q54	74181	1	1
Q55	74181	1	1
Q56	74181	1	1
Q57	74181	1	1
Q58	74181	1	1
Q59	74181	1	1
Q60	74181	1	1
Q61	74181	1	1
Q62	74181	1	1
Q63	74181	1	1
Q64	74181	1	1
Q65	74181	1	1
Q66	74181	1	1
Q67	74181	1	1
Q68	74181	1	1
Q69	74181	1	1
Q70	74181	1	1
Q71	74181	1	1
Q72	74181	1	1
Q73	74181	1	1
Q74	74181	1	1
Q75	74181	1	1
Q76	74181	1	1
Q77	74181	1	1
Q78	74181	1	1
Q79	74181	1	1
Q80	74181	1	1
Q81	74181	1	1
Q82	74181	1	1
Q83	74181	1	1
Q84	74181	1	1
Q85	74181	1	1
Q86	74181	1	1
Q87	74181	1	1
Q88	74181	1	1
Q89	74181	1	1
Q90	74181	1	1
Q91	74181	1	1
Q92	74181	1	1
Q93	74181	1	1
Q94	74181	1	1
Q95	74181	1	1
Q96	74181	1	1
Q97	74181	1	1
Q98	74181	1	1
Q99	74181	1	1
Q100	74181	1	1

Q101	
Q101	1.00
Q102	1.00
Q103	1.00
Q104	1.00
Q105	1.00
Q106	1.00
Q107	1.00
Q108	1.00
Q109	1.00
Q110	1.00
Q111	1.00
Q112	1.00
Q113	1.00
Q114	1.00
Q115	1.00
Q116	1.00
Q117	1.00
Q118	1.00
Q119	1.00
Q120	1.00
Q121	1.00
Q122	1.00
Q123	1.00
Q124	1.00
Q125	1.00
Q126	1.00
Q127	1.00
Q128	1.00
Q129	1.00
Q130	1.00
Q131	1.00
Q132	1.00
Q133	1.00
Q134	1.00
Q135	1.00
Q136	1.00
Q137	1.00
Q138	1.00
Q139	1.00
Q140	1.00
Q141	1.00
Q142	1.00
Q143	1.00
Q144	1.00
Q145	1.00
Q146	1.00
Q147	1.00
Q148	1.00
Q149	1.00
Q150	1.00
Q151	1.00
Q152	1.00
Q153	1.00
Q154	1.00
Q155	1.00
Q156	1.00
Q157	1.00
Q158	1.00
Q159	1.00
Q160	1.00
Q161	1.00
Q162	1.00
Q163	1.00
Q164	1.00
Q165	1.00
Q166	1.00
Q167	1.00
Q168	1.00
Q169	1.00
Q170	1.00
Q171	1.00
Q172	1.00
Q173	1.00
Q174	1.00
Q175	1.00
Q176	1.00
Q177	1.00
Q178	1.00
Q179	1.00
Q180	1.00

GT-S5DP/1 PROTOTYPE SCEMATICS

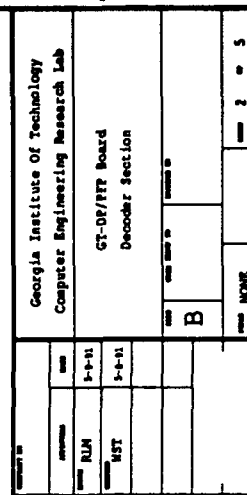


4 3 2 1

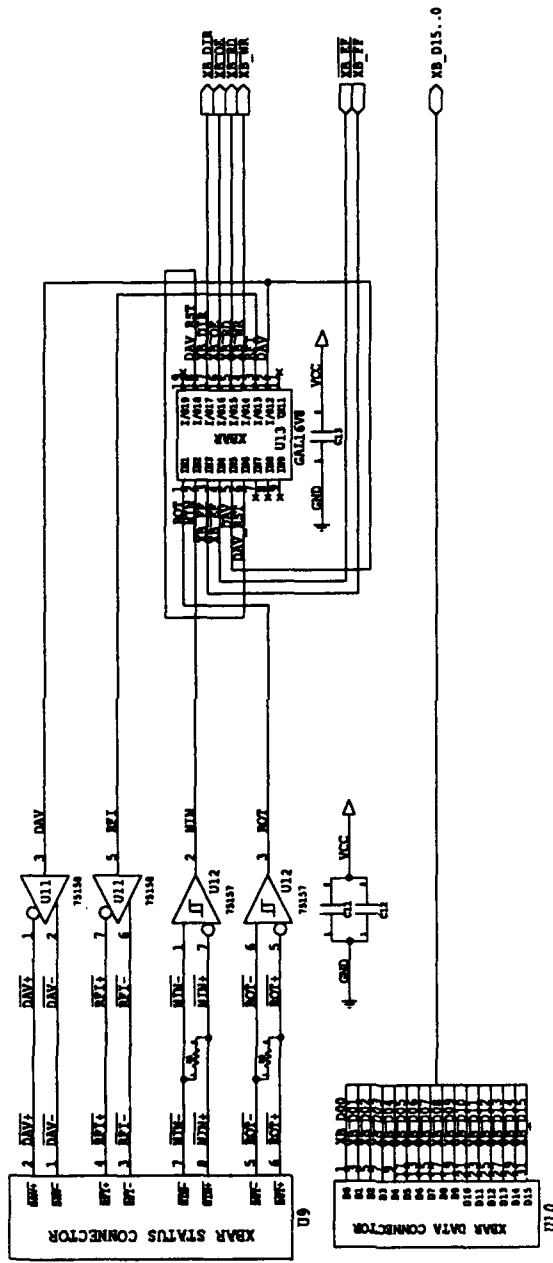

Georgia Institute Of Technology Computer Engineering Research Lab		GT-DP/PPP Board	
Crosbar Connection Section		Crosbar Connection Section	
B		NONE	
3		5	

4 3 2 1

1 2 3 4

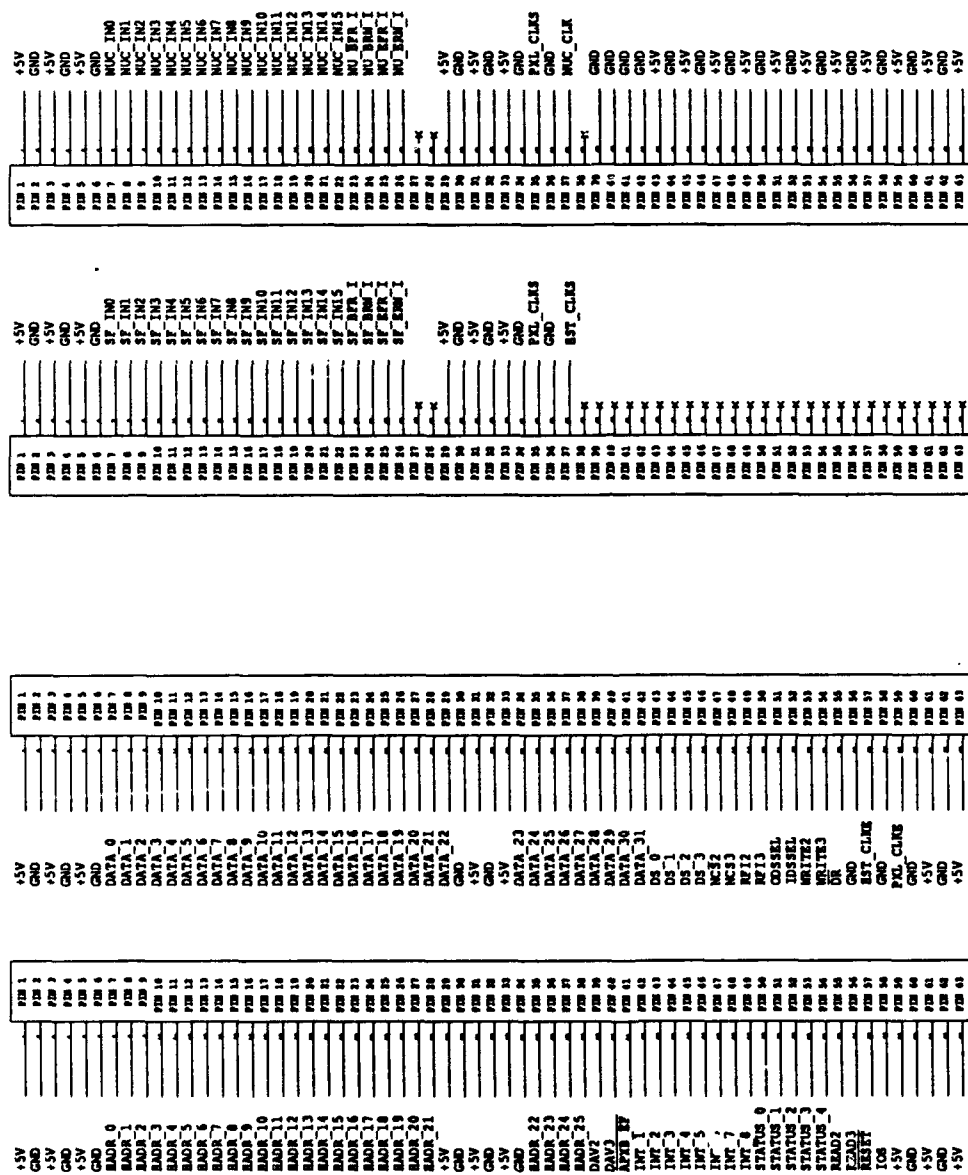

Georgia Institute Of Technology	
Computer Engineering Research Lab	
GT-DP/PFP Board	
NAME	3-4-91
DATE	3-4-91
TEST	
B	
NONE	
1	

1 2 3 4

NAME dec1;
Partno 000;
Date 5/7/91;
Revision 0.00;
Designer Dr. Tan;
Company Cerl;
Assembly GT-DP/PFP;
Location none;
Device G16V8;

/* Allowable Target Device Types: GAL16V8 */

/* Inputs */

Pin 1 = !BS;
Pin 2 = HADR_4;
Pin 3 = HADR_5;
Pin 4 = HADR_6;
Pin 5 = ODSSSEL;
Pin 6 = IDSSSEL;
Pin 7 = !APXB_EF;
PIN 8 = !APXB_FF;
Pin 9 = !XACK;

/* Outputs */

Pin 12 = !CS_D;
Pin 13 = !CS_S;
Pin 14 = !CS_X;
Pin 15 = !APXB_RD;
PIN 16 = !APXB_WR;
Pin 17 = DATA_0;
Pin 18 = DATA_1;
Pin 19 = !DR;

/* Logic Equations */

CS_S = BS & !HADR_6 & !HADR_5 & !HADR_4;
CS_D = BS & !HADR_6 & !HADR_5 & HADR_4;
CS_X = BS & !HADR_6 & HADR_5 & !HADR_4;
APXB_RD = !ODSSSEL & IDSSSEL & BS & !HADR_6 & HADR_5 & HADR_4;
APXB_WR = ODSSSEL & !IDSSSEL & BS & !HADR_6 & HADR_5 & HADR_4;

DATA_1.OE = BS & !ODSSSEL & IDSSSEL & HADR_6 & !HADR_5 & !HADR_4;
DATA_1 = APXB_EF;
DATA_0.OE = BS & !ODSSSEL & IDSSSEL & HADR_6 & !HADR_5 & !HADR_4;
DATA_0 = APXB_FF;
DR.OE = BS;
DR = BS & (!HADR_6 & !HADR_5 # !HADR_6 & HADR_5 & !HADR_4) & XACK #
BS & !HADR_6 & HADR_5 & HADR_4 #
BS & HADR_6 & !HADR_5 & !HADR_4;

NAME dec2;
Partno 000;
Date 5/7/91;
Revision 0.00;
Designer Dr. Tan;
Company Cerl;
Assembly GT-DP/PFP;
Location none;
Device G16V8;

/* Allowable Target Device Types: GAL16V8 */

/* Inputs */

Pin 1 = DS_0;
Pin 2 = DS_1;
Pin 3 = DS_2;
Pin 4 = DS_3;
Pin 5 = ODSSEL;
Pin 6 = IDSSEL;

/* Outputs */

Pin 12 = !MWTC;
Pin 13 = !MRDC;
Pin 14 = !BS;

/* Logic Equations */

BS = (DS_3 & DS_2 & !DS_1 & !DS_0);
MWTC = ODSSEL & !IDSSEL;
MRDC = !ODSSEL & IDSSEL;@

NAME XBar;
Partno 000;
Date 9/11/90;
Revision 0.00;
Designer Dr. Tan;
Company Cerl;
Assembly Multibus interface;
Location none;
Device G16V8;

/* Allowable Target Device Types: GAL16V8 */

/* Inputs */

Pin 1 = ROT;
Pin 2 = WIN;
Pin 3 = !XB_FF;
Pin 4 = !XB_EF;
Pin 5 = DAV_IN;
Pin 6 = DAV_RST_IN;
Pin 7 = !reset;


/* Outputs */

Pin 12 = DAV;
Pin 13 = RFI;
Pin 14 = !XB_WR;
Pin 15 = !XB_RD;
Pin 16 = !XB_oe;
Pin 17 = XB_DIR;
Pin 18 = DAV_RST;


/* Logic Equations */


RFI = !XB_FF;
XB_WR = WIN;
XB_RD = ROT & DAV_IN;
XB_DIR = ROT;
XB_oe = (WIN # ROT);
DAV = ROT & !reset & !XB_EF # !DAV_RST_IN;
DAV_RST = (!ROT # reset) # !DAV_IN;

GT-SPAT/1 SCHEMATICS

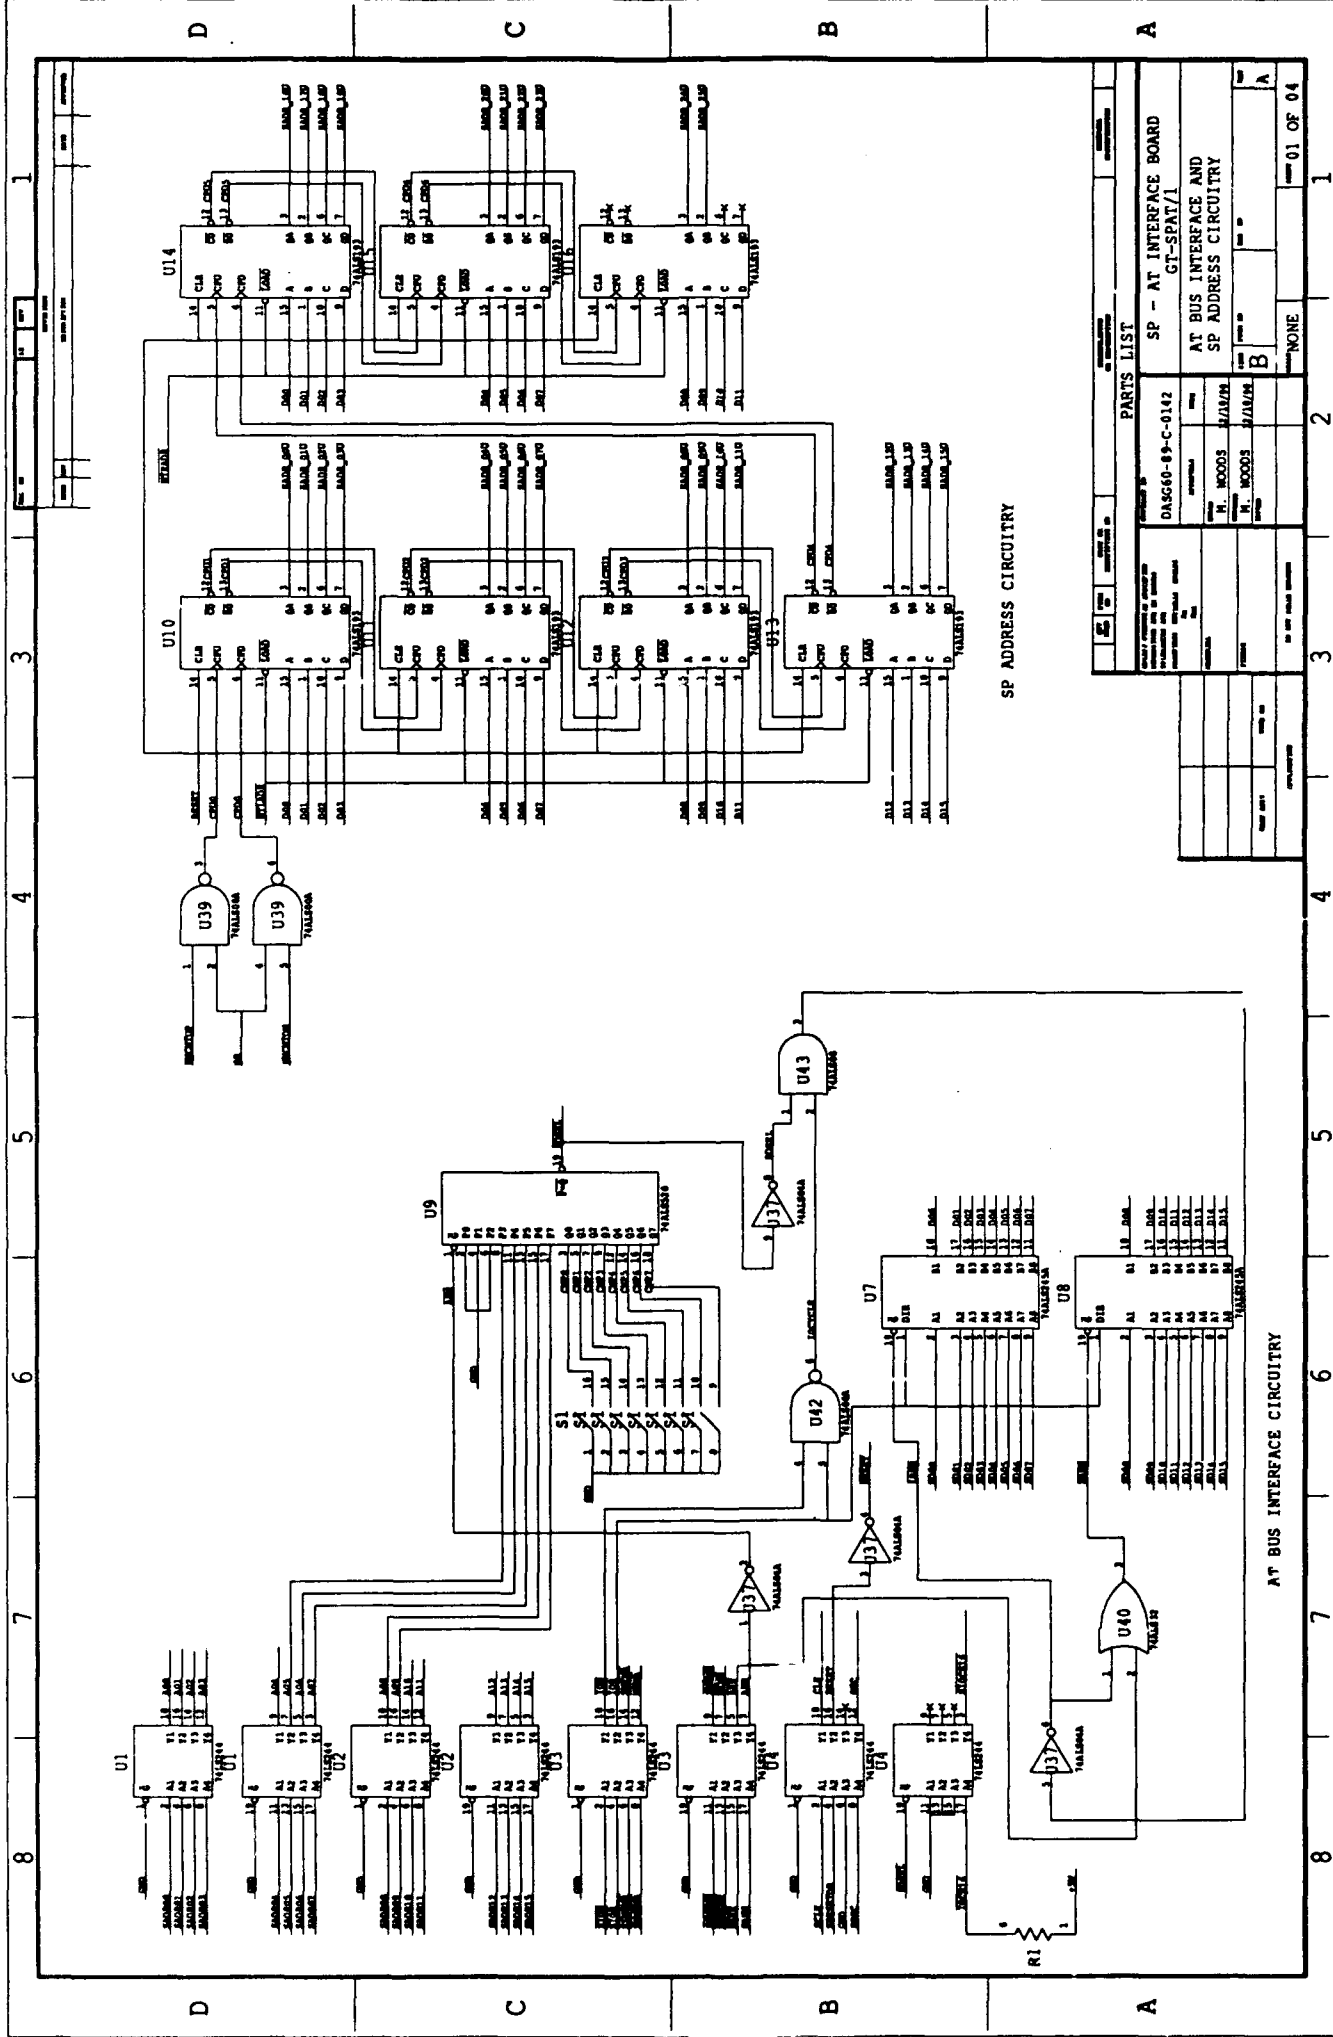

[illegible]

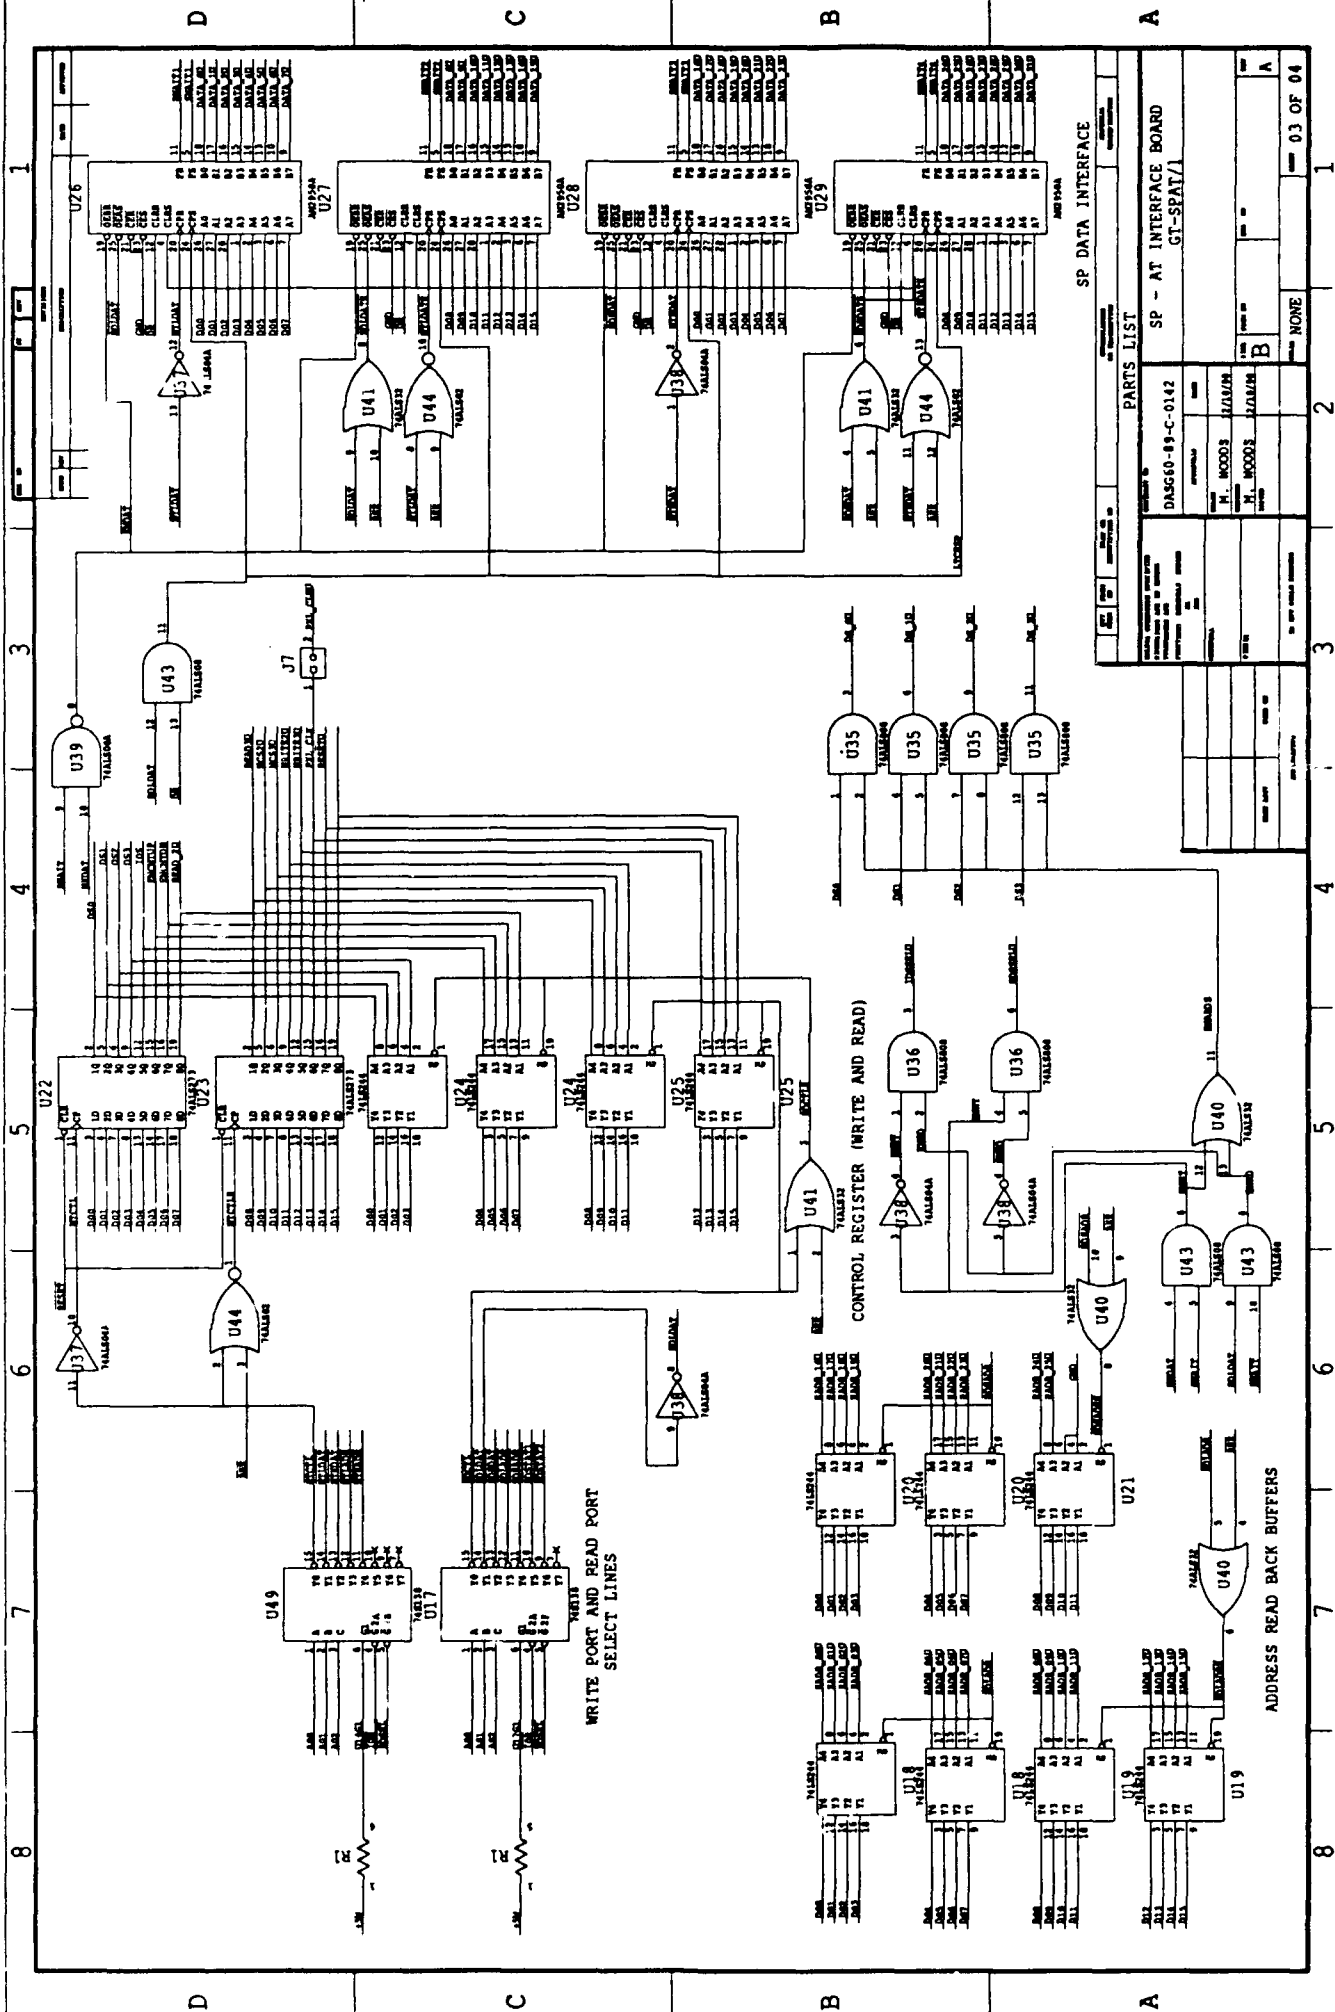

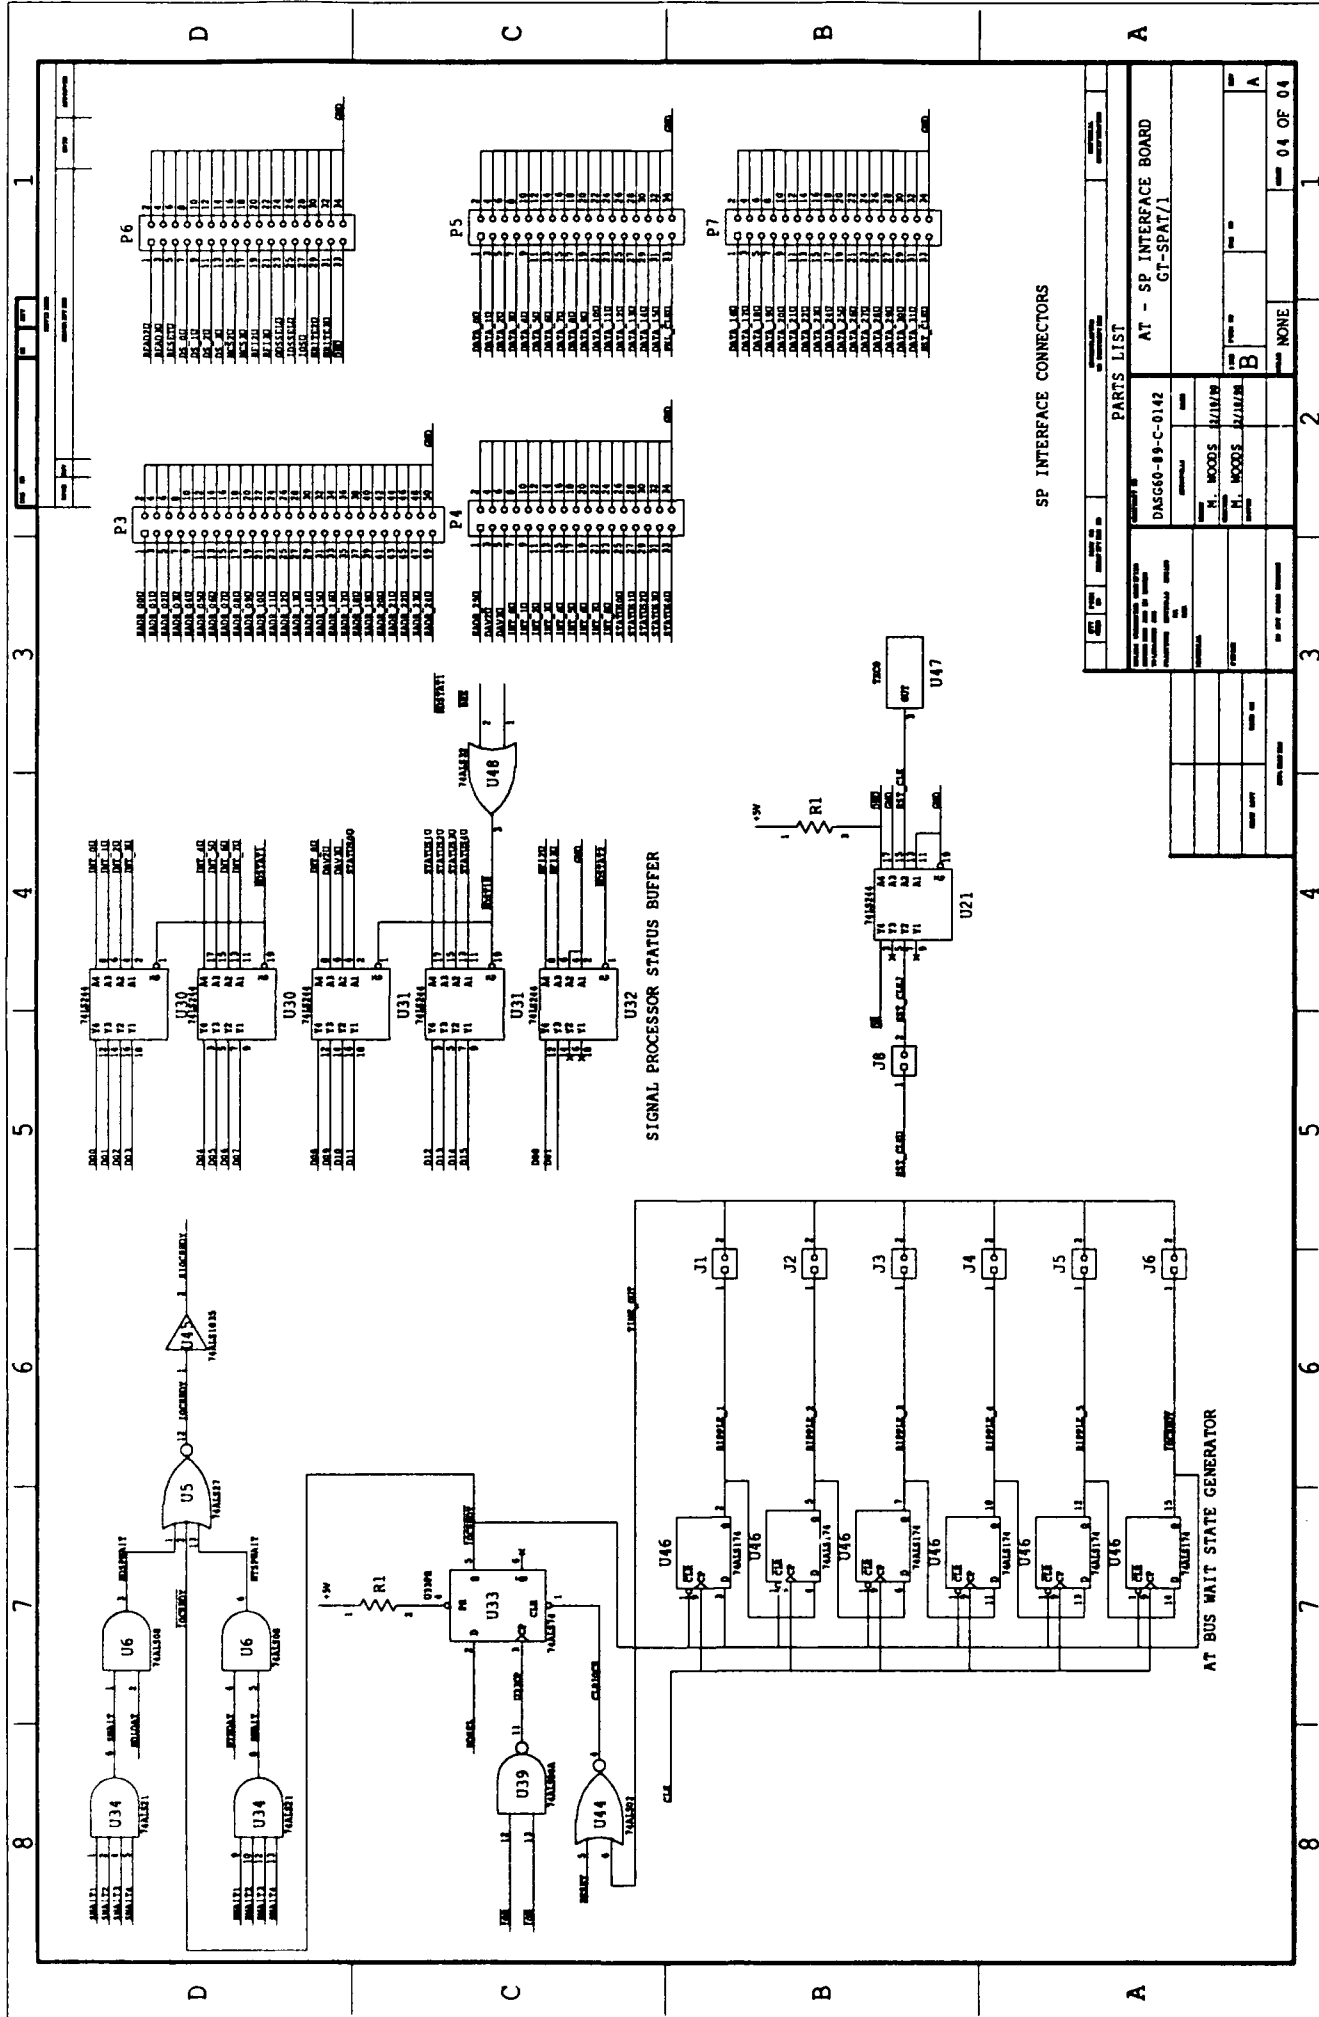

NAME enb;
Partno 000;
Date 03/26/91;
Revision 0.0;
Designer Mike Woods;
Company Cerl, Georgia Tech;
Assembly GT-SPAT Interface Board;
Location GAL3;
Device G16V8;

/* Input */

/* Pin 1 = pxl_clk; */
Pin 2 = enwt;
Pin 3 = ds0;
Pin 4 = ds1;
Pin 5 = ds2;
Pin 6 = ds3;
Pin 7 = enrdr;
Pin 8 = !dr;
Pin 9 = !reset;

/* Output */

Pin 12 = bus_en;
Pin 13 = !s0;
Pin 14 = !s1;
Pin 15 = !s2;
Pin 16 = wrck;
Pin 17 = rdck;
Pin 18 = !ios;
Pin 19 = !tr;

/* Logic Equations */

\$DEFINE idle 'b'000
\$DEFINE write0 'b'010
\$DEFINE write1 'b'011
\$DEFINE read0 'b'100
\$DEFINE read1 'b'101
\$DEFINE read2 'b'111
\$DEFINE rsv0 'b'001
\$DEFINE rsv1 'b'110

\$DEFINE idles (!s2 & !s1 & !s0)
\$DEFINE write0s (!s2 & s1 & !s0)
\$DEFINE write1s (!s2 & s1 & s0)
\$DEFINE read0s (s2 & !s1 & !s0)
\$DEFINE read1s (s2 & !s1 & s0)
\$DEFINE read2s (s2 & s1 & s0)

```
$DEFINE rsv0s (!s2 & !s1 & s0)
$DEFINE rsv1s ( s2 & s1 & !s0)
```


```
$DEFINE thr ( ds3 & !ds2 & ds1 & !ds0)
$DEFINE sf ( ds3 & !ds2 & ds1 & ds0)
$DEFINE ctr (!ds3 & !ds2 & ds1)
```

```
bus_en = write0s # write1s # read0s # read1s # read2s # rsv0s # rsv1s;
wrck.d = write0s & dr;
rdck.d = read0s & (dr # ctr) & !sf # read2s & dr & sf;
tr = read0s & dr # read1s & dr # read2s & dr # rsv0s & dr # rsv1s & dr
    # write0s & dr;
ios.d = tr & !ios # !tr & ios # idles;
```


```
field state_machine = [s2..0];
SEQUENCE state_machine {
PRESENT idle IF (enrd & !enwt & !reset) NEXT read0;
              IF (!enrd & enwt & !reset) NEXT write0;
              DEFAULT NEXT idle;
PRESENT write0 IF (dr # reset) NEXT idle;
              DEFAULT NEXT write0;
PRESENT write1 NEXT idle;
PRESENT read0 IF sf & dr & !reset NEXT read1;
              IF (ctr # (!sf)&dr # reset) NEXT idle;
              DEFAULT NEXT read0;
PRESENT read1 if (dr # reset) NEXT read2;
              DEFAULT NEXT read1;
PRESENT read2 if (dr # reset) NEXT idle;
              DEFAULT NEXT read2;
PRESENT rsv0 NEXT idle;
PRESENT rsv1 NEXT idle;
```

@

GT-GNCTST/1 SCHEMATICS

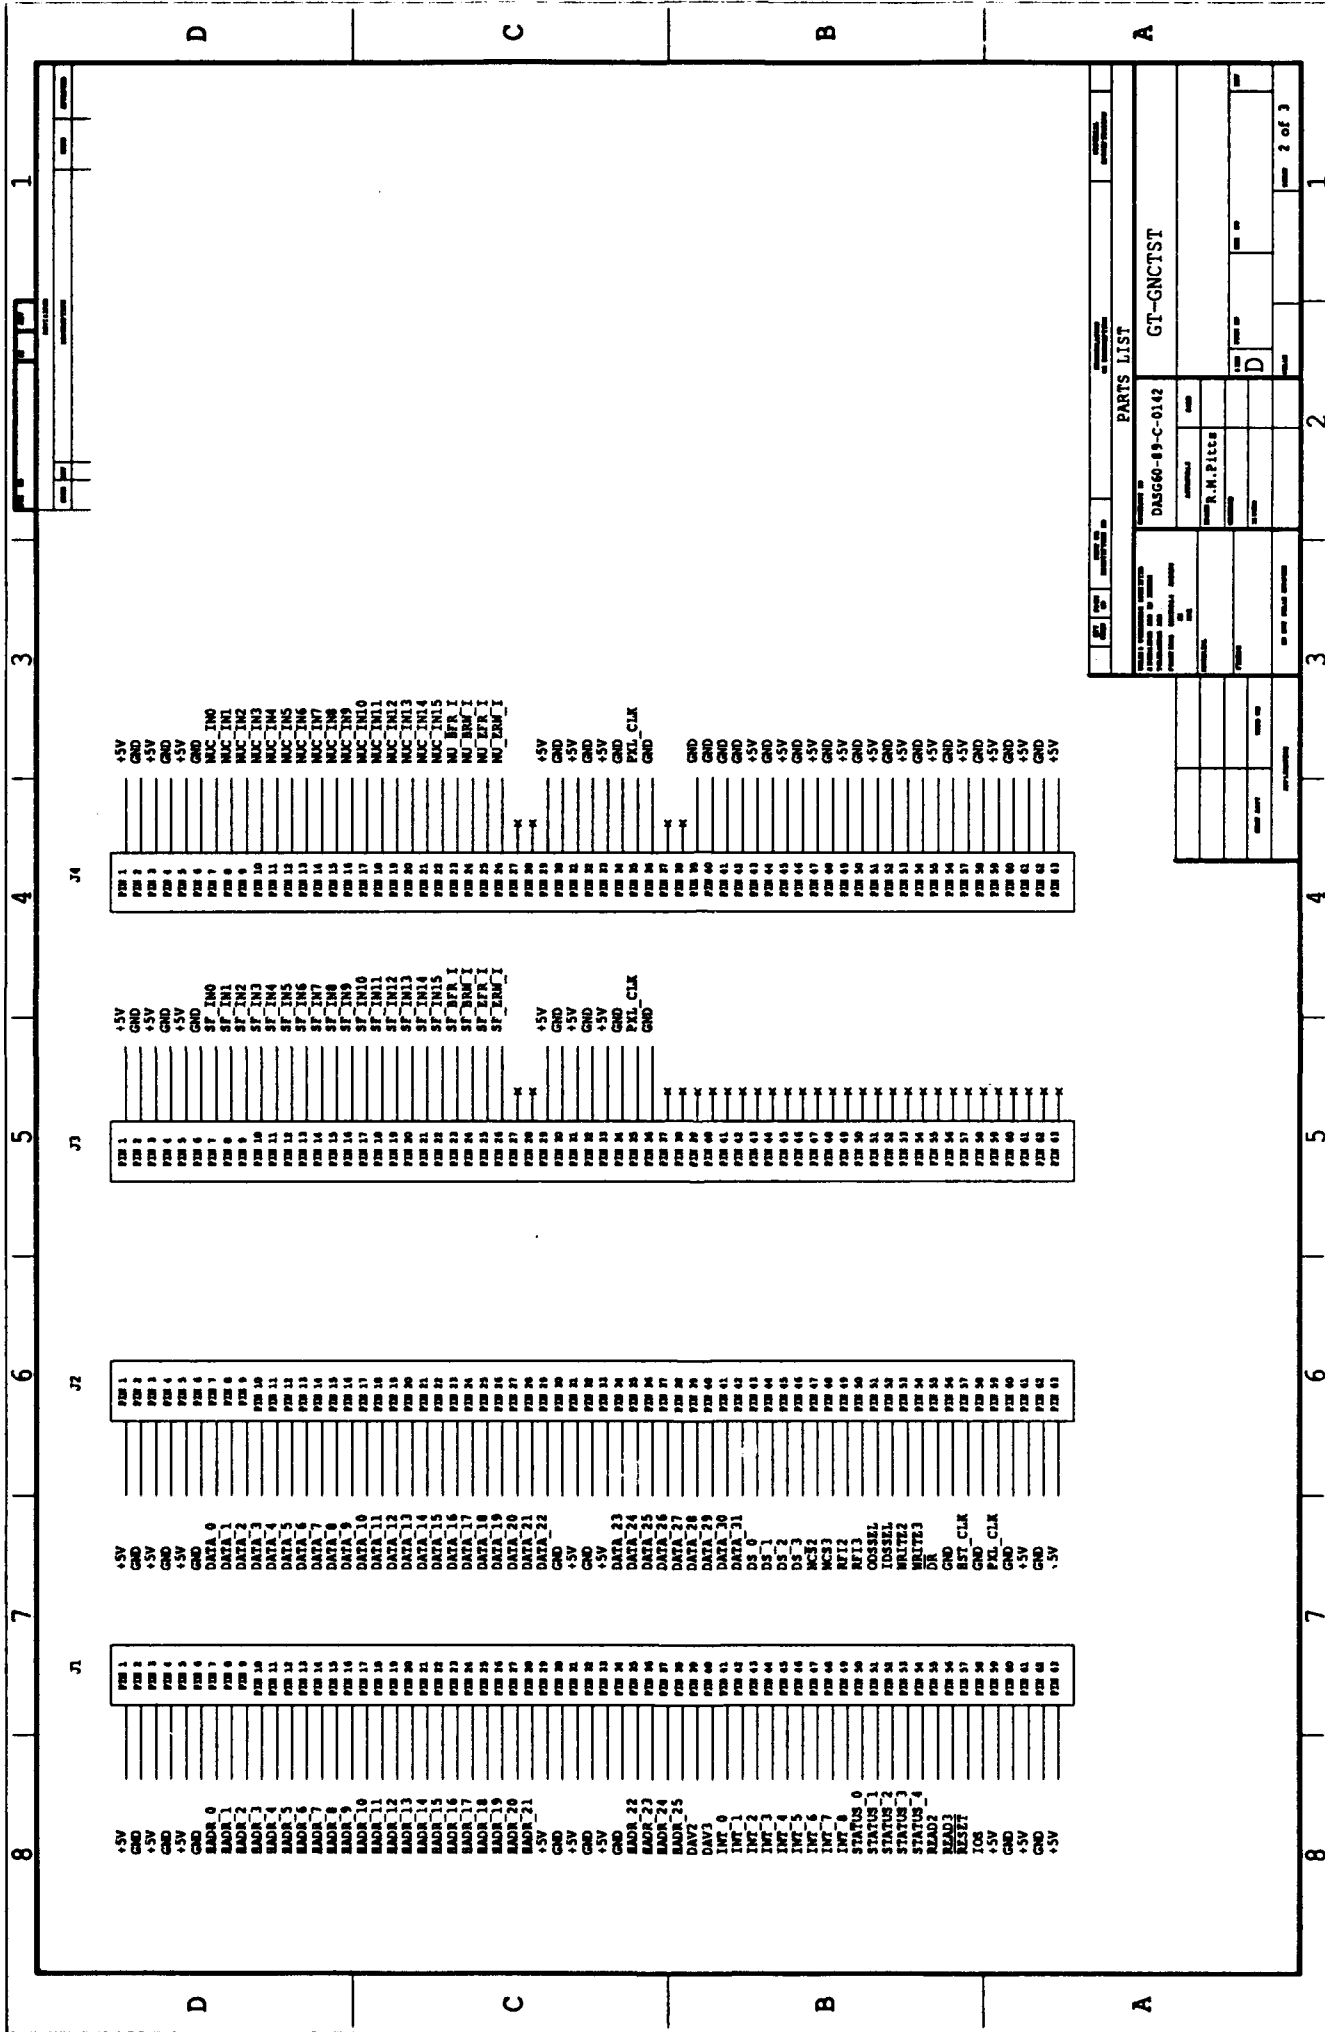

PARTS LIST			
QTY	DESCRIPTION	REF	QTY
1	GT-GNCTST		1
1	DASG60-49-C-0142		1
1	RESISTOR		1
1	CAPACITOR		1
1	IC		1
1	DIODE		1
1	TRANSISTOR		1
1	RELAY		1
1	SWITCH		1
1	CONNECTOR		1
1	WIRE		1
1	CRACK		1
1	SCREW		1
1	WASHER		1
1	NUT		1
1	SPACER		1
1	INSULATOR		1
1	SHIELD		1
1	GROUND		1
1	POWER		1
1	SIGNAL		1
1	DATA		1
1	STATUS		1
1	RESET		1
1	TEST		1
1	CLK		1
1	PXL		1
1	GND		1
1	+5V		1
1	DATA 0		1
1	DATA 1		1
1	DATA 2		1
1	DATA 3		1
1	DATA 4		1
1	DATA 5		1
1	DATA 6		1
1	DATA 7		1
1	DATA 8		1
1	DATA 9		1
1	DATA 10		1
1	DATA 11		1
1	DATA 12		1
1	DATA 13		1
1	DATA 14		1
1	DATA 15		1
1	DATA 16		1
1	DATA 17		1
1	DATA 18		1
1	DATA 19		1
1	DATA 20		1
1	DATA 21		1
1	DATA 22		1
1	DATA 23		1
1	DATA 24		1
1	DATA 25		1
1	DATA 26		1
1	DATA 27		1
1	DATA 28		1
1	DATA 29		1
1	DATA 30		1
1	DATA 31		1
1	DATA 32		1
1	DATA 33		1
1	DATA 34		1
1	DATA 35		1
1	DATA 36		1
1	DATA 37		1
1	DATA 38		1
1	DATA 39		1
1	DATA 40		1
1	DATA 41		1
1	DATA 42		1
1	DATA 43		1
1	DATA 44		1
1	DATA 45		1
1	DATA 46		1
1	DATA 47		1
1	DATA 48		1
1	DATA 49		1
1	DATA 50		1
1	DATA 51		1
1	DATA 52		1
1	DATA 53		1
1	DATA 54		1
1	DATA 55		1
1	DATA 56		1
1	DATA 57		1
1	DATA 58		1
1	DATA 59		1
1	DATA 60		1
1	DATA 61		1
1	DATA 62		1
1	DATA 63		1
1	DATA 64		1
1	DATA 65		1
1	DATA 66		1
1	DATA 67		1
1	DATA 68		1
1	DATA 69		1
1	DATA 70		1
1	DATA 71		1
1	DATA 72		1
1	DATA 73		1
1	DATA 74		1
1	DATA 75		1
1	DATA 76		1
1	DATA 77		1
1	DATA 78		1
1	DATA 79		1
1	DATA 80		1
1	DATA 81		1
1	DATA 82		1
1	DATA 83		1
1	DATA 84		1
1	DATA 85		1
1	DATA 86		1
1	DATA 87		1
1	DATA 88		1
1	DATA 89		1
1	DATA 90		1
1	DATA 91		1
1	DATA 92		1
1	DATA 93		1
1	DATA 94		1
1	DATA 95		1
1	DATA 96		1
1	DATA 97		1
1	DATA 98		1
1	DATA 99		1
1	DATA 100		1
1	DATA 101		1
1	DATA 102		1
1	DATA 103		1
1	DATA 104		1
1	DATA 105		1
1	DATA 106		1
1	DATA 107		1
1	DATA 108		1
1	DATA 109		1
1	DATA 110		1
1	DATA 111		1
1	DATA 112		1
1	DATA 113		1
1	DATA 114		1
1	DATA 115		1
1	DATA 116		1
1	DATA 117		1
1	DATA 118		1
1	DATA 119		1
1	DATA 120		1
1	DATA 121		1
1	DATA 122		1
1	DATA 123		1
1	DATA 124		1
1	DATA 125		1
1	DATA 126		1
1	DATA 127		1
1	DATA 128		1
1	DATA 129		1
1	DATA 130		1
1	DATA 131		1
1	DATA 132		1
1	DATA 133		1
1	DATA 134		1
1	DATA 135		1
1	DATA 136		1
1	DATA 137		1
1	DATA 138		1
1	DATA 139		1
1	DATA 140		1
1	DATA 141		1
1	DATA 142		1
1	DATA 143		1
1	DATA 144		1
1	DATA 145		1
1	DATA 146		1
1	DATA 147		1
1	DATA 148		1
1	DATA 149		1
1	DATA 150		1
1	DATA 151		1
1	DATA 152		1
1	DATA 153		1
1	DATA 154		1
1	DATA 155		1
1	DATA 156		1
1	DATA 157		1
1	DATA 158		1
1	DATA 159		1
1	DATA 160		1
1	DATA 161		1
1	DATA 162		1
1	DATA 163		1
1	DATA 164		1
1	DATA 165		1
1	DATA 166		1
1	DATA 167		1
1	DATA 168		1
1	DATA 169		1
1	DATA 170		1
1	DATA 171		1
1	DATA 172		1
1	DATA 173		1
1	DATA 174		1
1	DATA 175		1
1	DATA 176		1
1	DATA 177		1
1	DATA 178		1
1	DATA 179		1
1	DATA 180		1
1	DATA 181		1
1	DATA 182		1
1	DATA 183		1
1	DATA 184		1
1	DATA 185		1
1	DATA 186		1
1	DATA 187		1
1	DATA 188		1
1	DATA 189		1
1	DATA 190		1
1	DATA 191		1
1	DATA 192		1
1	DATA 193		1
1	DATA 194		1
1	DATA 195		1
1	DATA 196		1
1	DATA 197		1
1	DATA 198		1
1	DATA 199		1
1	DATA 200		1
1	DATA 201		1
1	DATA 202		1
1	DATA 203		1
1	DATA 204		1
1	DATA 205		1
1	DATA 206		1
1	DATA 207		1
1	DATA 208		1
1	DATA 209		1
1	DATA 210		1
1	DATA 211		1
1	DATA 212		1
1	DATA 213		1
1	DATA 214		1
1	DATA 215		1
1	DATA 216		1
1	DATA 217		1
1	DATA 218		1
1	DATA 219		1
1	DATA 220		1
1	DATA 221		1
1	DATA 222		1
1	DATA 223		1
1	DATA 224		1
1	DATA 225		1
1	DATA 226		1
1	DATA 227		1
1	DATA 228		1
1	DATA 229		1
1	DATA 230		1
1	DATA 231		1
1	DATA 232		1
1	DATA 233		1
1	DATA 234		1
1	DATA 235		1
1	DATA 236		1
1	DATA 237		1
1	DATA 238		1
1	DATA 239		1
1	DATA 240		1
1	DATA 241		1
1	DATA 242		1
1	DATA 243		1
1	DATA 244		1
1	DATA 245		1
1	DATA 246		1
1	DATA 247		1
1	DATA 248		1
1	DATA 249		1
1	DATA 250		1
1	DATA 251		1
1	DATA 252		1
1	DATA 253		1
1	DATA 254		1
1	DATA 255		1
1	DATA 256		1
1	DATA 257		1
1	DATA 258		1
1	DATA 259		1
1	DATA 260		1
1	DATA 261		1
1	DATA 262		1
1	DATA 263		1
1	DATA 264		1
1	DATA 265		1
1	DATA 266		1
1	DATA 267		1
1	DATA 268		1
1	DATA 269		1
1	DATA 270		1
1	DATA 271		1
1	DATA 272		1
1	DATA 273		1
1	DATA 274		1
1	DATA 275		1
1	DATA 276		1
1	DATA 277		1
1	DATA 278		1
1	DATA 279		1
1	DATA 280		1
1	DATA 281		1
1	DATA 282		1
1	DATA 283		1
1	DATA 284		1
1	DATA 285		1
1	DATA 286		1
1	DATA 287		1
1	DATA 288		1
1	DATA 289		1
1	DATA 290		1
1	DATA 291		1
1	DATA 292		1
1	DATA 293		1
1	DATA 294		1
1	DATA 295		1
1	DATA 296		1
1	DATA 297		1
1	DATA 298		1
1	DATA 299		1
1	DATA 300		1
1	DATA 301		1
1	DATA 302		1
1	DATA 303		1
1	DATA 304		1
1	DATA 305		1
1	DATA 306		1
1	DATA 307		1
1	DATA 308		1
1	DATA 309		1
1	DATA 310		1
1	DATA 311		1
1	DATA 312		1
1	DATA 313		1
1	DATA 314		1
1	DATA 315		1
1	DATA 316		1
1	DATA 317		1
1	DATA 318		1
1	DATA 319		1
1	DATA 320		1
1	DATA 321		1
1	DATA 322		1
1	DATA 323		1
1	DATA 324		1
1	DATA 325		1
1	DATA 326		1
1	DATA 327		1
1	DATA 328		1
1	DATA 329		1
1	DATA 330		1
1	DATA 331		1
1	DATA 332		1
1	DATA 333		1
1	DATA 334		1
1	DATA 335		1
1	DATA 336		1
1	DATA 337		1
1	DATA 338		1
1	DATA 339		1
1	DATA 340		1
1	DATA 341		1
1	DATA 342		1
1	DATA 343		1
1	DATA 344		1
1	DATA 345		1
1	DATA 346		1
1	DATA 347		1
1	DATA 348		1
1	DATA 349		1
1	DATA 350		1
1	DATA 351		1
1	DATA 352		1
1	DATA 353		1
1	DATA 354		1

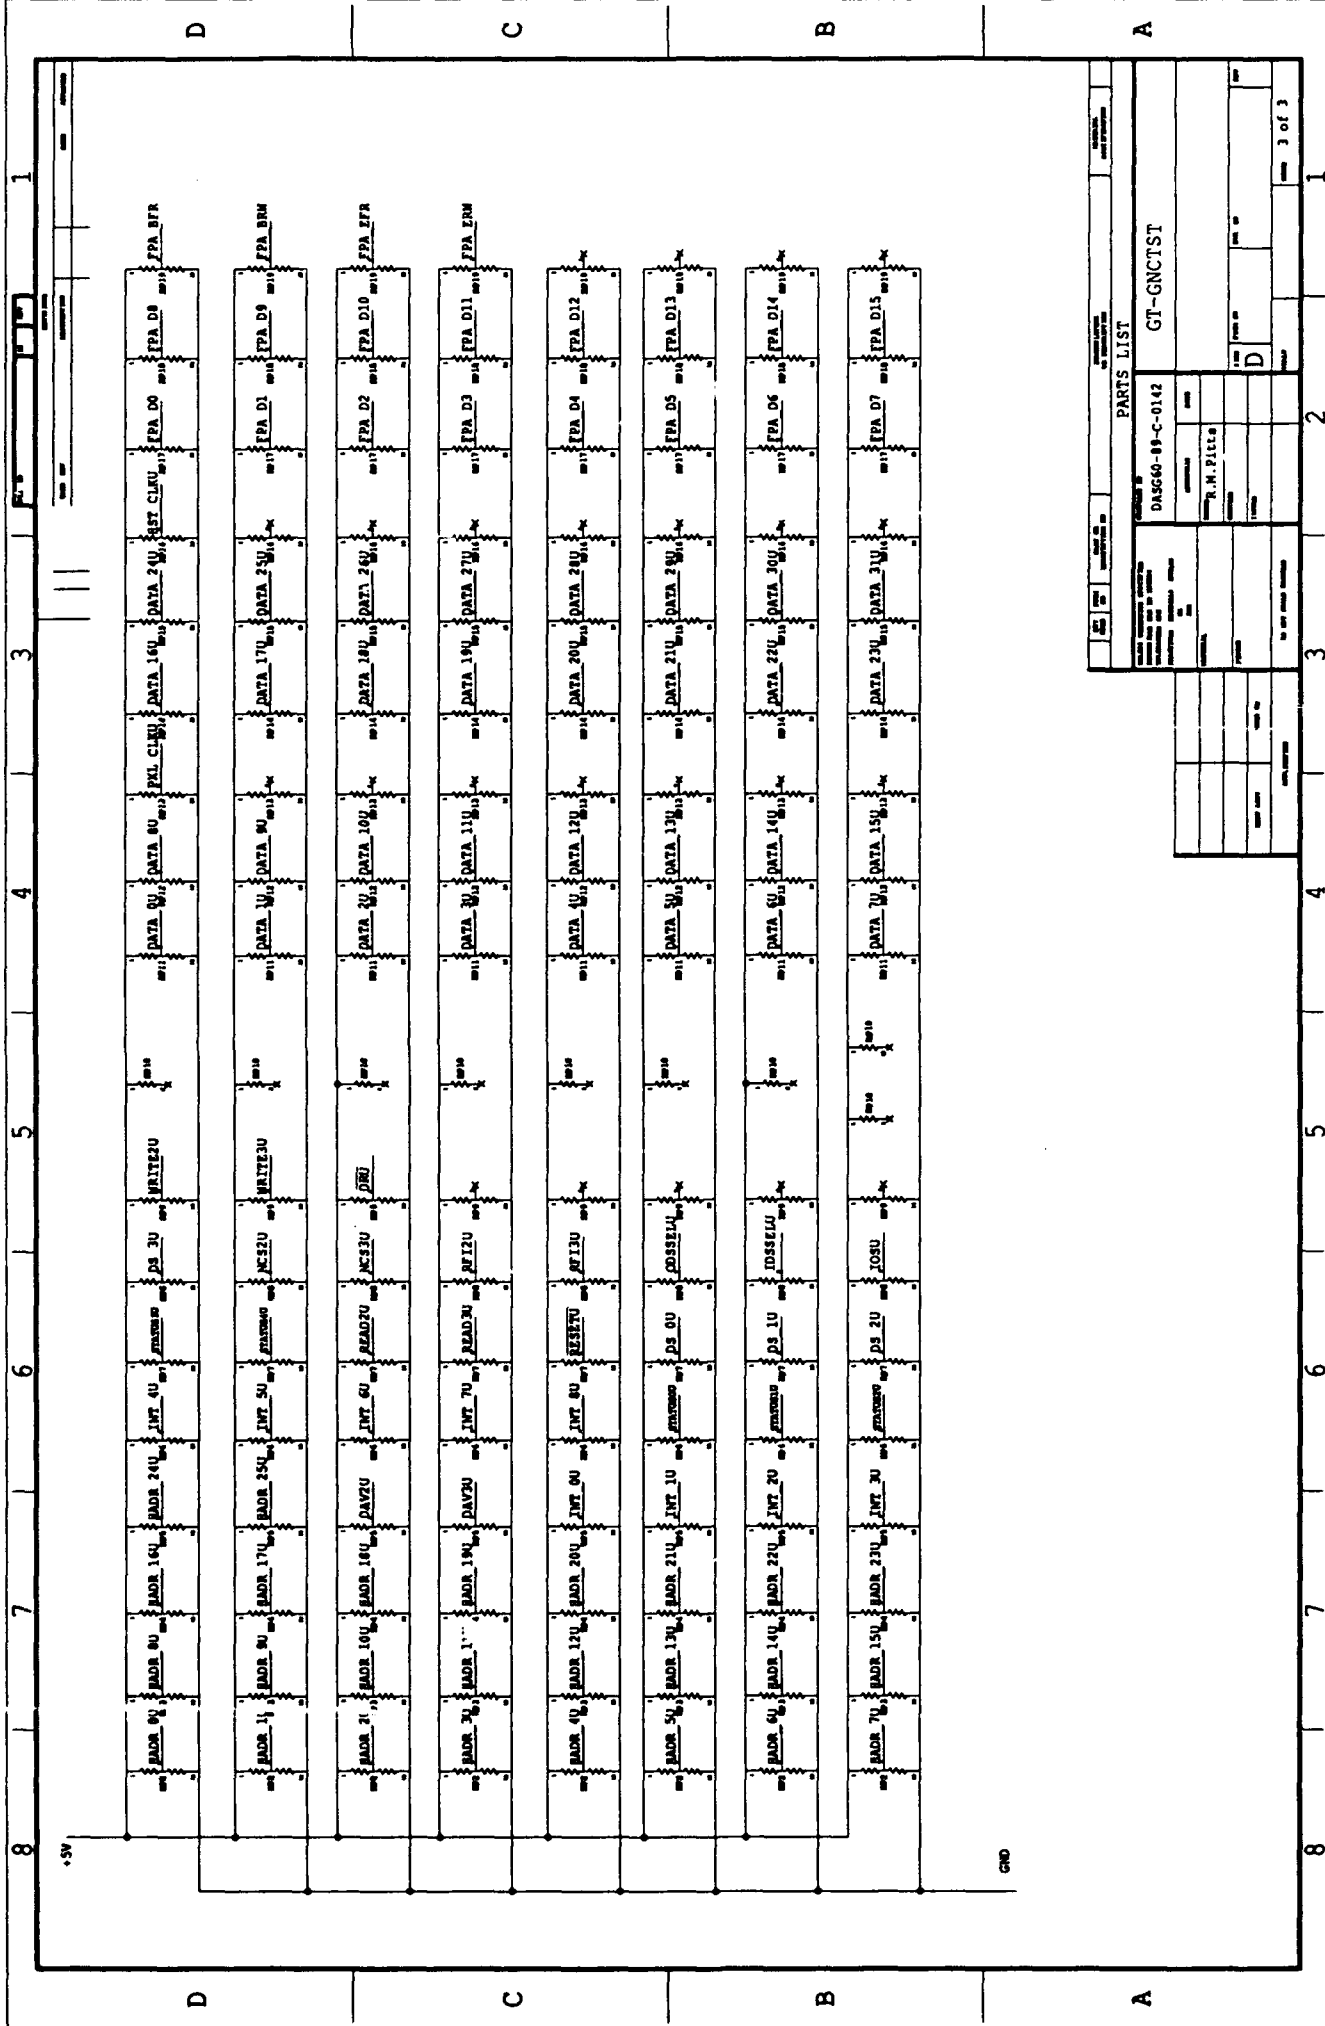


PARTS LIST	
DATA 10U	DATA 11U
DATA 12U	DATA 13U
DATA 14U	DATA 15U
DATA 16U	DATA 17U
DATA 18U	DATA 19U
DATA 20U	DATA 21U
DATA 22U	DATA 23U
DATA 24U	DATA 25U
DATA 26U	DATA 27U
DATA 28U	DATA 29U
DATA 30U	

GT-GNCTST


DASG40-89-C-0142


3 of 3


GT-VDSTST/1 SCEMATICS

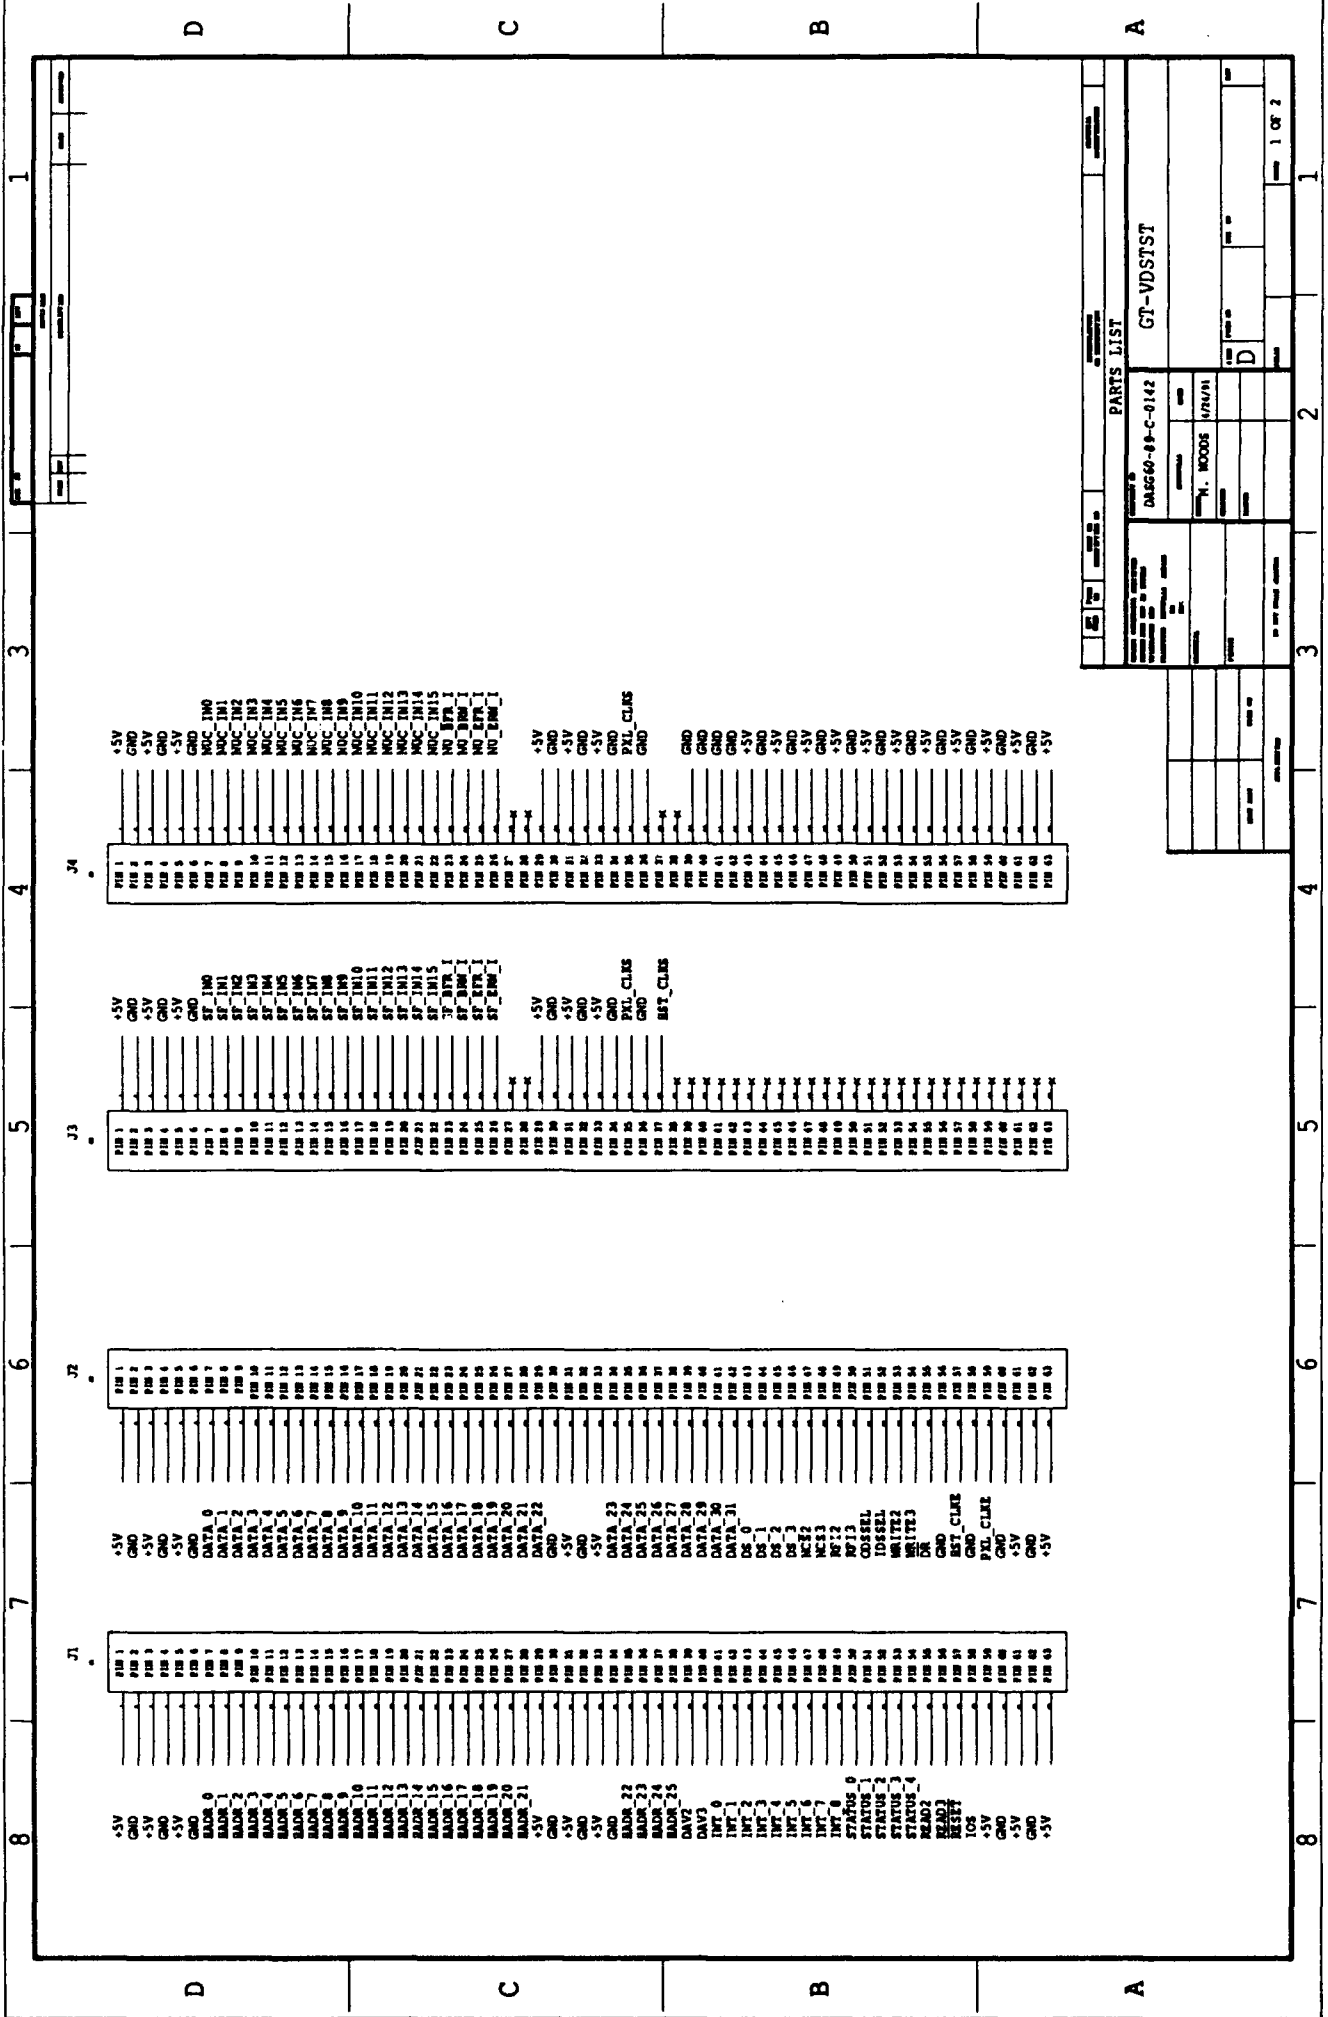

PARTS LIST			
GT-VDTST			
DASC60-89-C-0142			
MOORE			
1/2N/1L			
D			
1 OF 2			

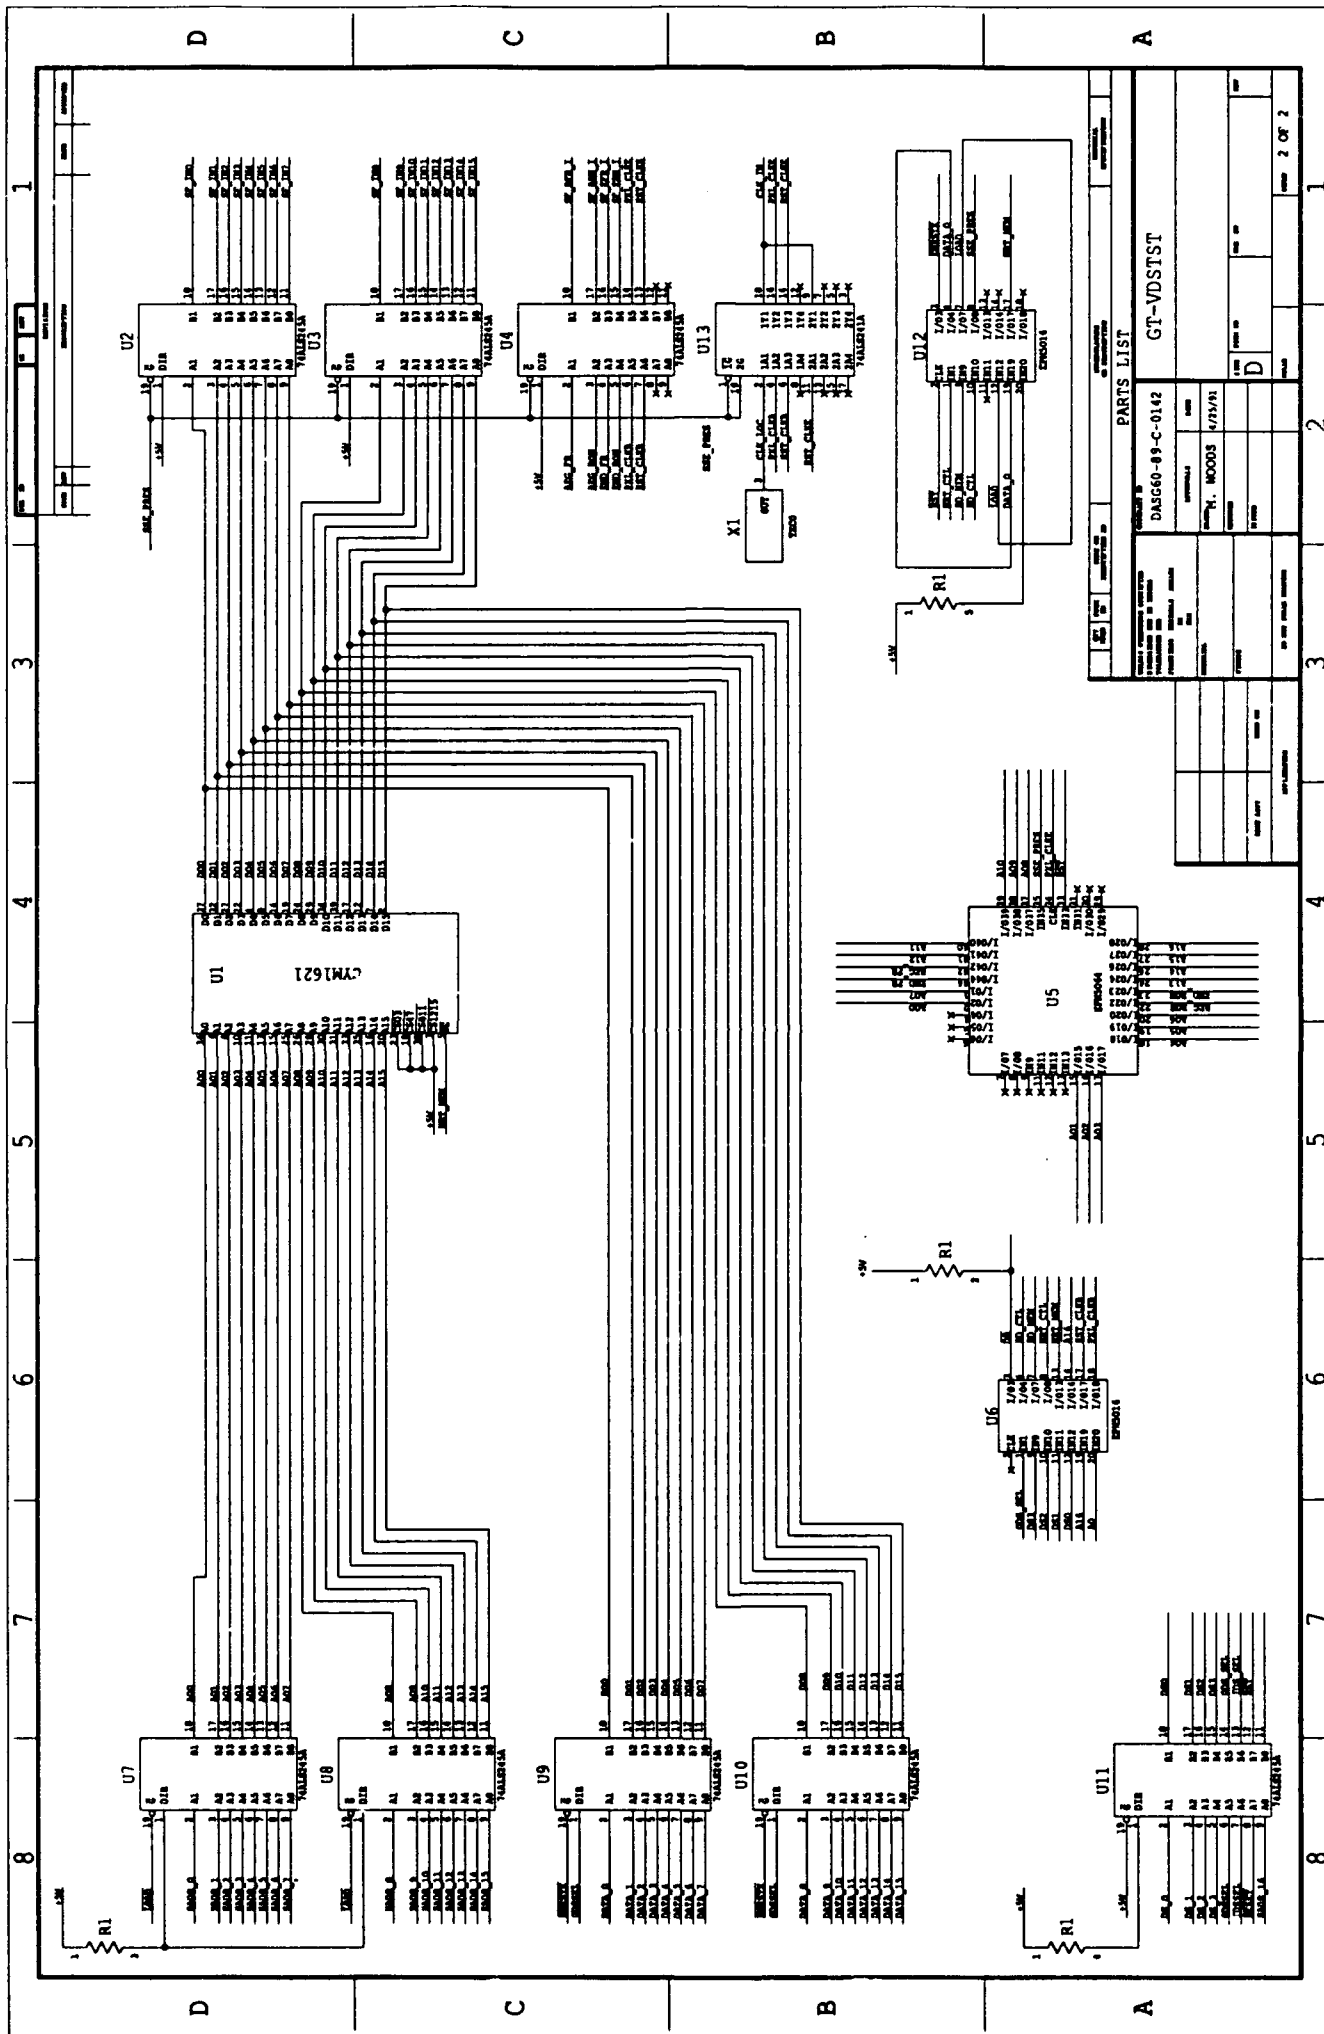

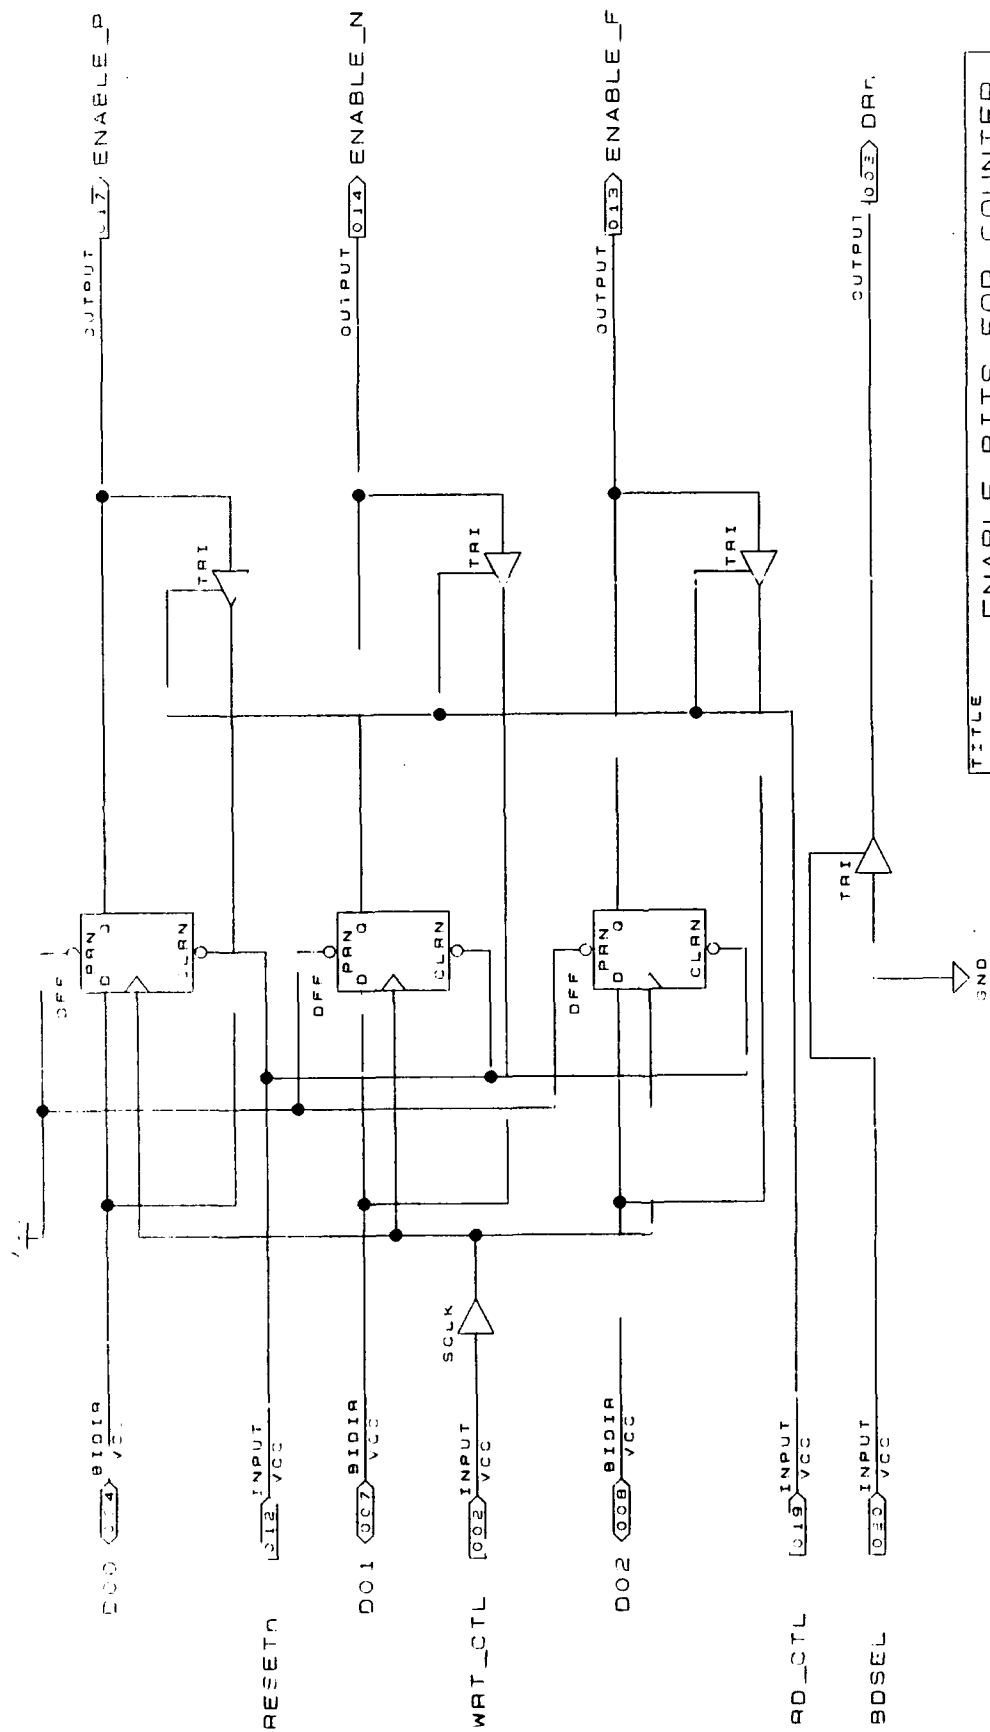

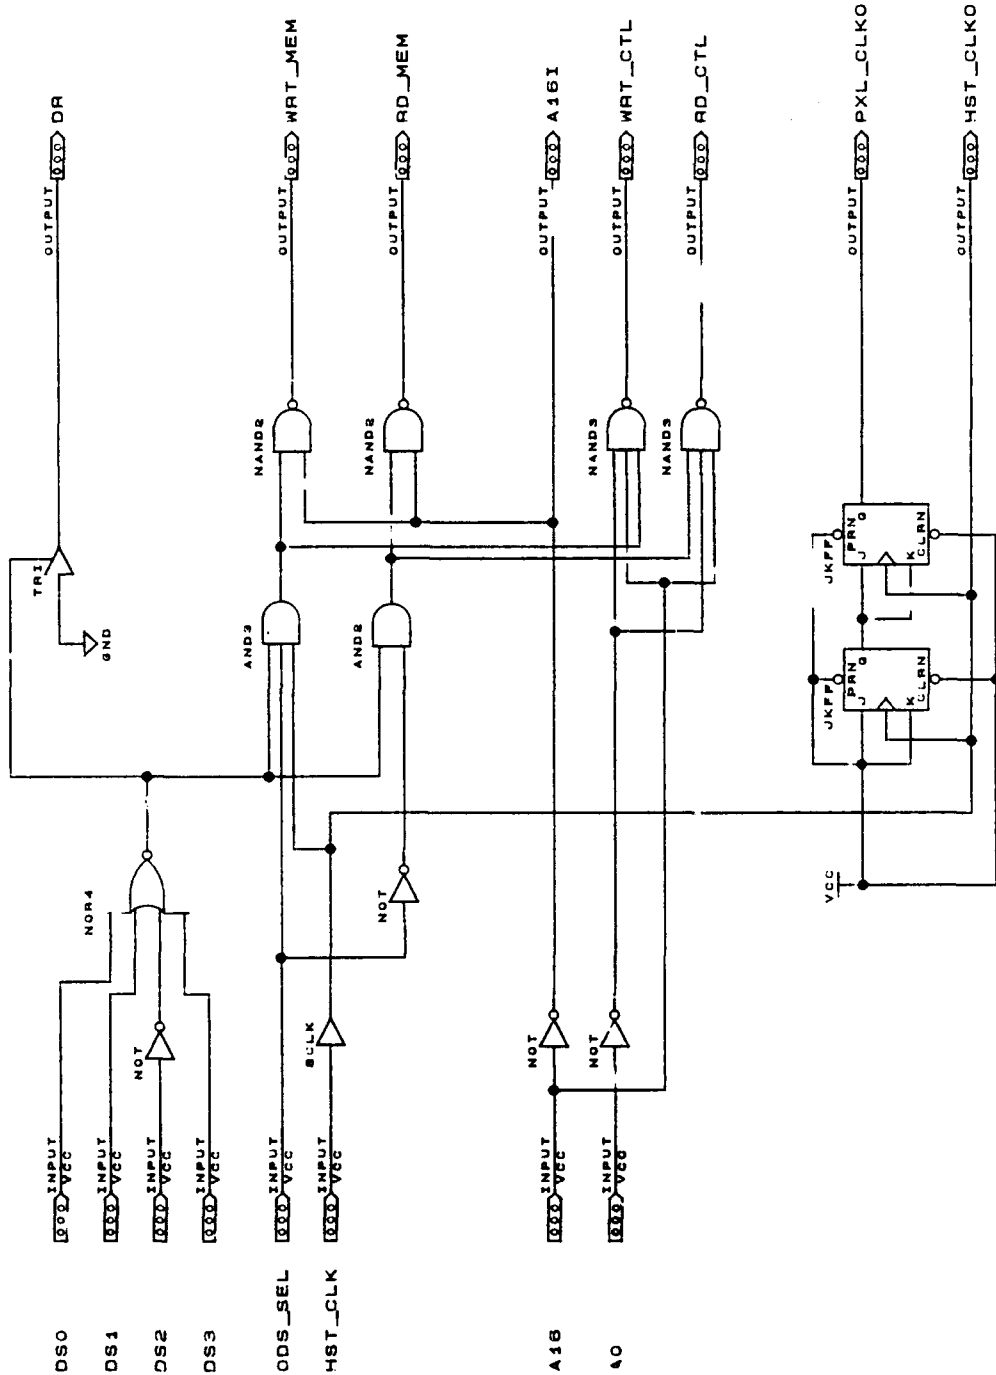

TITLE EP BUS INTERFACE LOGIC			
COMPANY Georgia Tech			
DESIGNER Mike Woods			
SIZE D	EP16	EP16016-1	NUMBER 1.00 REV A
DATE 11-01-91	4-23-1991	SHEET 1	SECURITY 1
TURBO ON			OFF

